

□□ □□ :

)

.

)

2
5
-
8
8
0

□
□
□
□
□
□
□
□
□
□
(
□

□□ 305D □□□ 30V 5A AC DC □□ □□□ □□□ LED □□ □□ □□ (USB □□ □
□) □□ □□ □□ □□

□□ □□


PRODUCT DISPLAY



PRODUCT SIZE



PRODUCT DETAILS

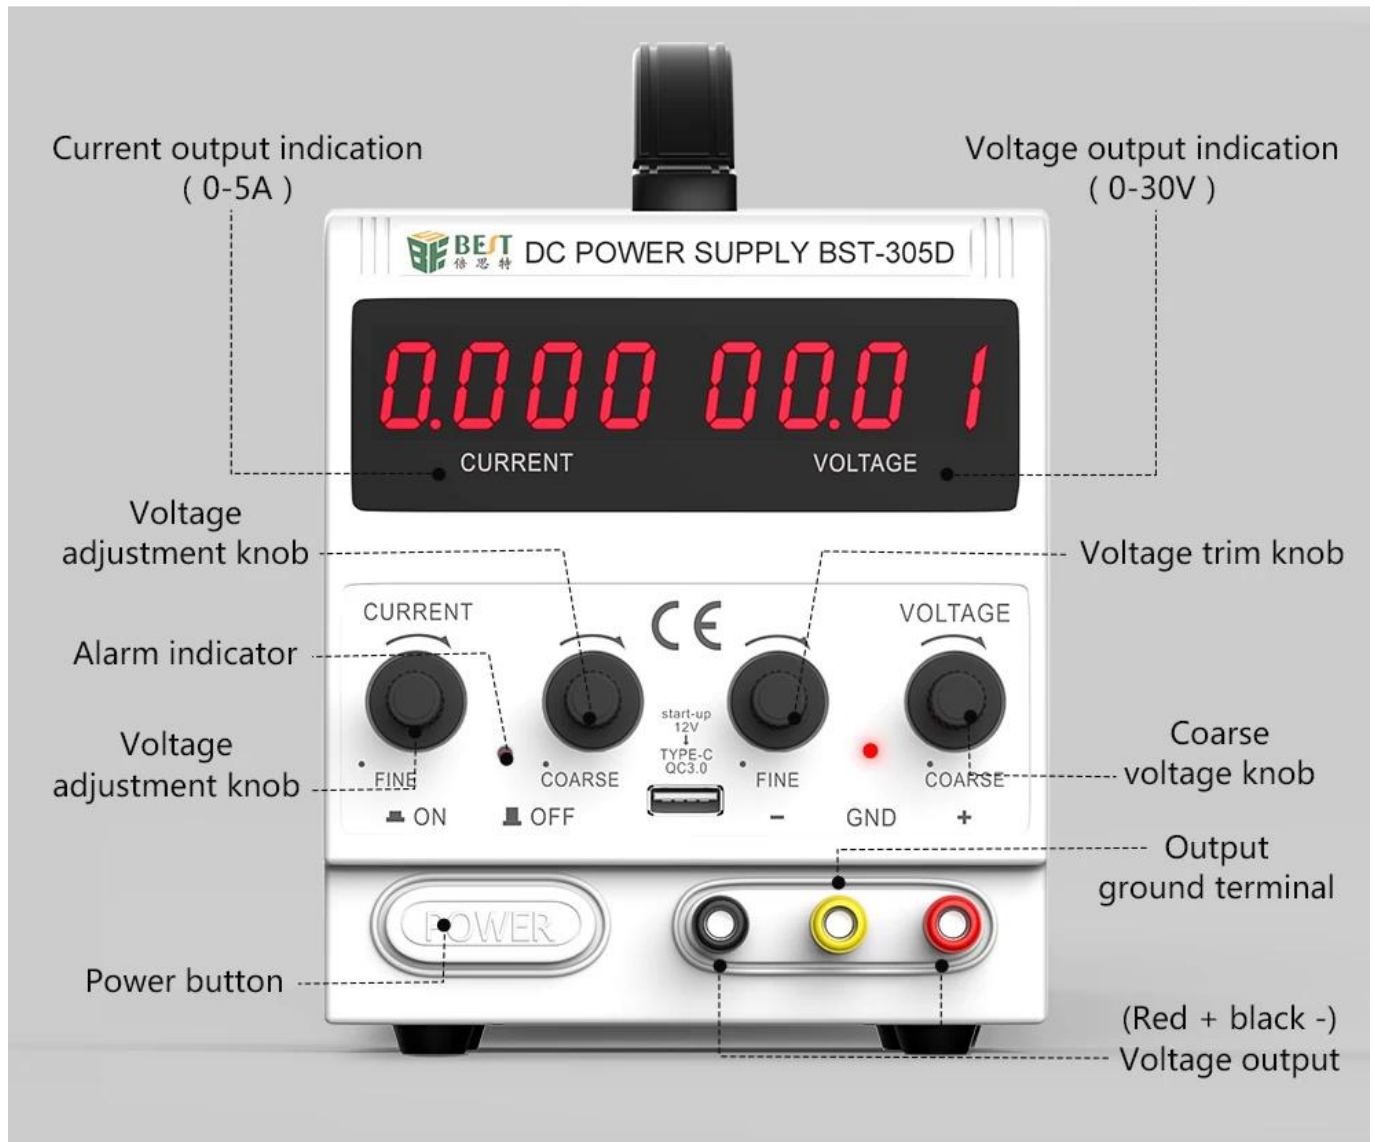



DC POWER SUPPLY BST-305D

0.000 00.01

CURRENT

VOLTAGE

4-digit display high precision

Current output: 0-5V

Voltage output: 0-30V

8 USB ports

It can simultaneously load up to 7A current shunt output, data upgrade, and test.



Please keep the vent unobstructed and at least 5 cm away from the shelter.
请保持散热口畅通，与遮挡物间至少有5厘米距离！

离！



110V/220V
SWITCH



110V and 220V switching

Portable Handle



PRODUCT PHOTOGRAPH



Specifications

model	PS-305D	output voltage	0-30V
Body weight	4.75KG	output current	0-5.0A
Dimensions	125MM*223MM*145MM	Storage Humidity	<80%
Power	1-50W	Voltage accuracy	0.1V
Input Voltage	AC 220/110V 50/60HZ	Current accuracy	10MA
Storage Enviromment	-20℃-80℃	Working Enviromment	-10℃-40℃

1.LED 显示 电压/电流;
2. 具有 过压 保护 DC 输出 电压;
具有 过流 保护 3.Precise 电压 调节;
4.Cell 具有 过压 保护 电压, 具有 过流 保护 电压 调节;
6. 具有 过压 保护, 具有 过流 保护;
具有 过压 保护 电压 8.Ripple 电压;