

□□

- 1.Smart□ □□□ □ □□ □□□□□□.
 2. □□ □□□ □□ □□□ □□ □□□ □□□□□.
 - 3.This □□ □ □□□□ □□ PTC□ □□□□□□.
 - 4.High □ □□□, □□ □□ □□□□, □ service □□.
 5. □□ □□□ □□□□□ □□ 100V-240V □□□□ □□□□□ □□□□□.
- □□□ □□□ □□ □□ □□□□□ 6. □□ □□.

□□:

□□□□ □□ □□

□□ □, □□□□□□ □□

□□□□, □□ □□

□□ □□

□□ □□ □□

□□ □□

□□ : BST-B-E

□□ : 110V ~ 240V

□□ : 20W

□□ □□ : 2-3 □

□□ □□ : 2.5 mm

□□ □□ □□ : 6.8mm-7.5mm

□□ □□ □□ : 3-5g / min

Temretature □□ : 180 °C -200 °C

N.G.:144g/pcs

□□ : 24pcs / □□

G.W.:4.5kg/box

PRODUCT APPLICATION



PRODUCT SIZE




PRODUCT DETAILS



PRODUCT FEATURES



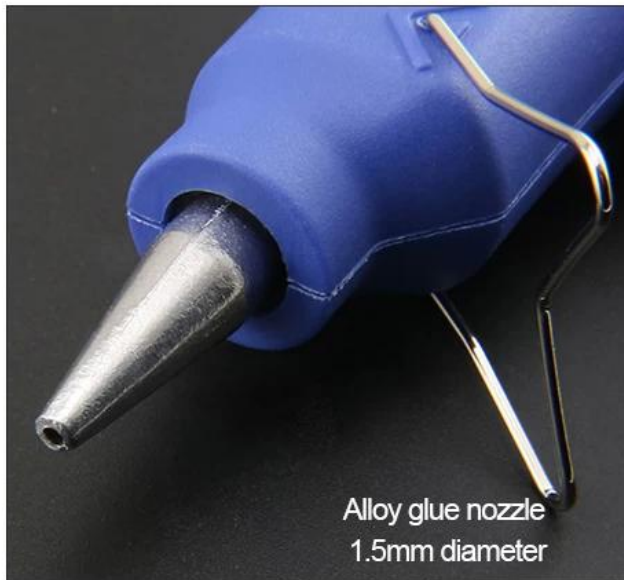

Name: Hot melt glue gun Model strips: 7mm Muzzle: Alloy mouth

Voltage: 110V/220V Model: BST-B-E Weight: 294.3G

Power: 20W Frequency: 50/60HZ

Feature1: Voltage limit is not built-in safety fuse,safe to use.

feature2: Ceramic PTC thermistor element heating speed,automatic thermostat,save energy

Feature3: Avoid pour glue and leak glue; glue gun tail retrofitting thermal insulation, glue gun and longer life

PRODUCT PHOTOGRAPH



PRODUCT PACKAGING

WEIGHT:295G



FRONT



BACK