

□□

□□ Sn45 / pb55

N.W. 100 □□


□□ □□ 0.3mm / 0.8mm

□□ 2.25 %

# HIGH PURITY SOLDER WIRE



## Product Usage

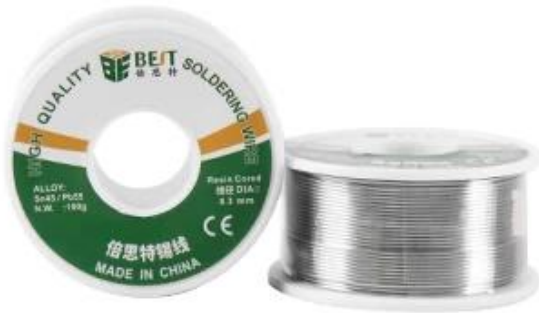

ALLOY	Sn45 / Pb55
N.W.	100g
WIRE DIAMETER	0.3 / 0.8mm
PACKAGING SIZE	54.99x27.44mm
PRODUCT TYPE	Tin wire
COLOPHONY PERCENTAGE	2.25%

### ▼ CHARACTERISTICS

This product can be used for welding various products. It has 45 percent high purity tin, low melting point, fast welding, good fluidity, neat coiling and smooth surface...

---


## PRODUCT INFORMATION

SMOOTH SURFACE AND EVEN DISTRIBUTION OF ROSIN IN THE LINE

**GOOD RESISTENCE, NEAT WINDING**




There is less residue after welding, the solder joint is bright.  
The impedance is high and the electric performance is excellent.

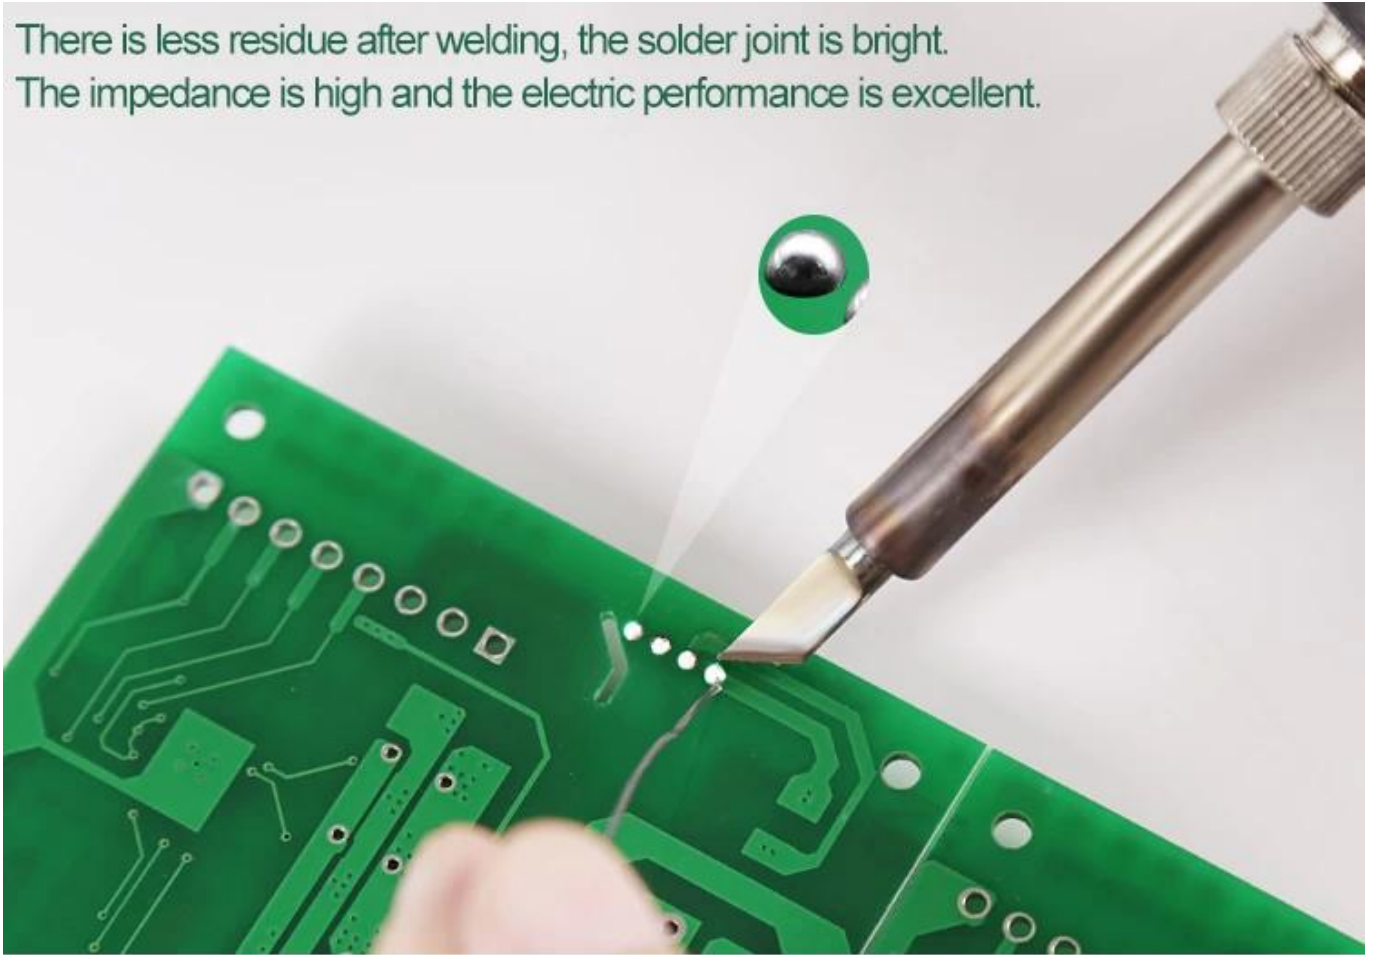

CAN BE USED FOR WELDING A VARIETY OF PRODUCTS



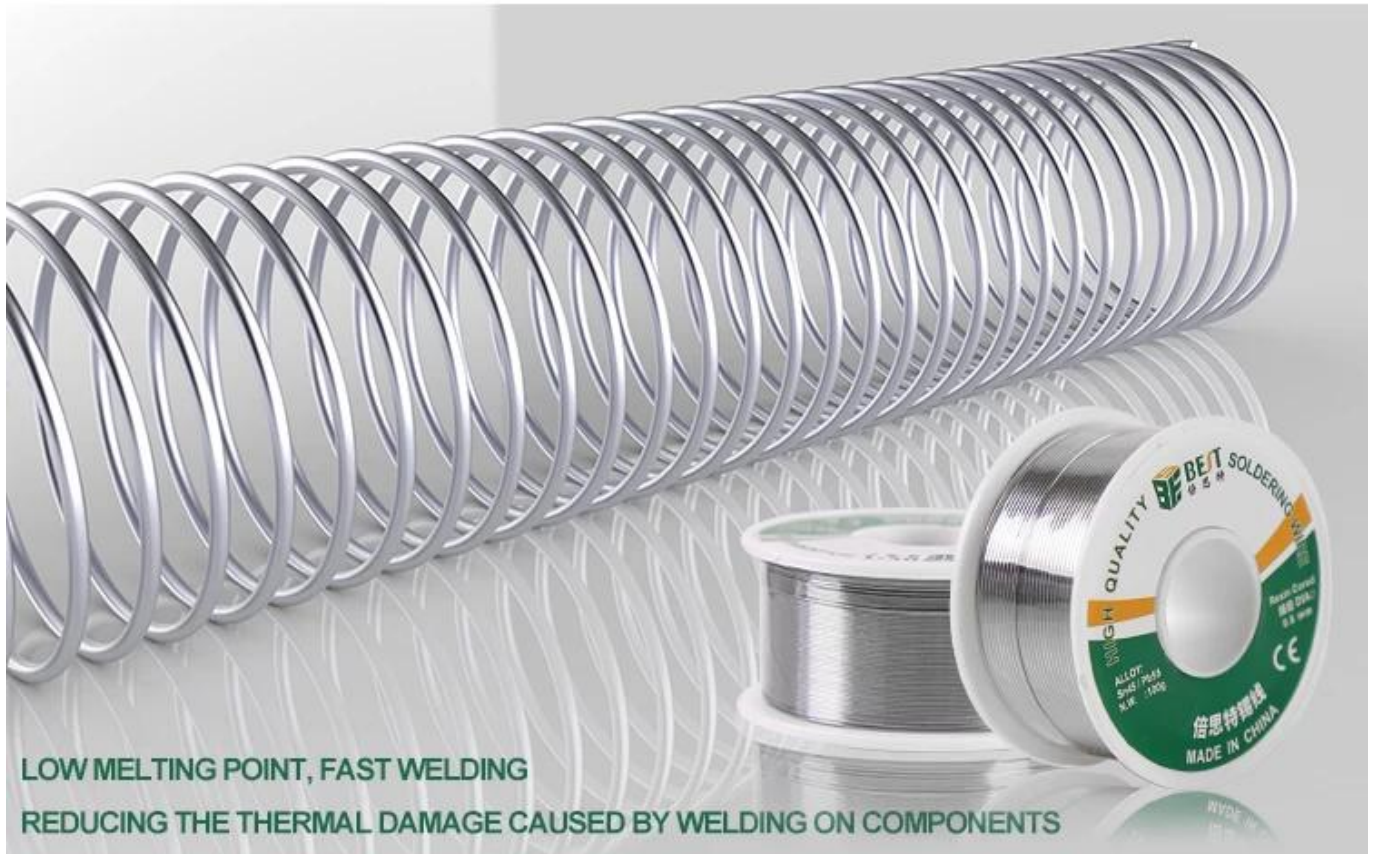

LOW MELTING POINT, FAST WELDING  
 REDUCING THE THERMAL DAMAGE CAUSED BY WELDING ON COMPONENTS

## PRODUCT SIZE




54.99mm



27.44mm

Wire diameter 0.3mm

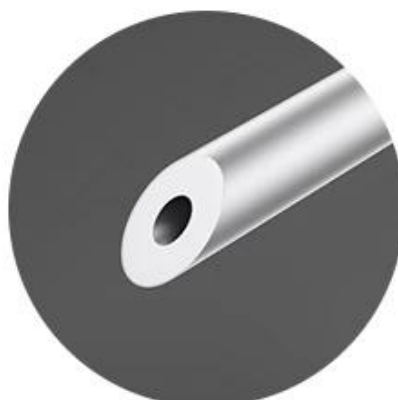

Wire diameter 0.8mm

