


00 00

00 000 000 000  
000 000 000  
00 7X-45X  
00 00 00 000  
00 00 00 CPU PCB 00

# STEREOMICROSCOPE

MULTI-FUNCTION

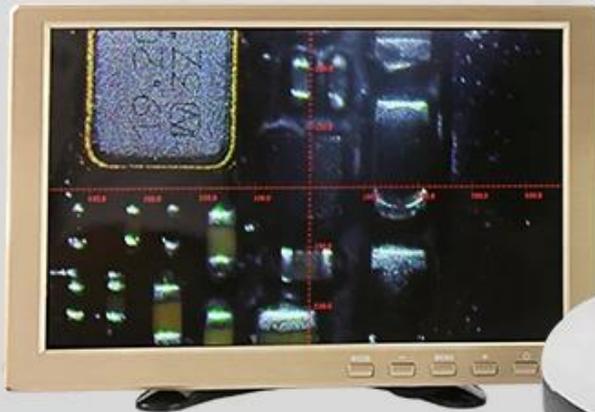

# Product Usage



|                          |  |
|--------------------------|--|
| N.W                      | 4.7kg  |
| Objective lens           | Continuous zoom 7x~45x                                     |
| Eyepiece                 | Binocular wide angle WF10X                                 |
| Power                    | 220v-50hz, 110v-50/60hz                                    |
| Transformer              | Built-in 0-12v, continuous dimming                         |
| Light source on the lamp | 12v/15w halogen lamp                                       |
| Under light source       | 12v/15w halogen lamp                                       |
| Eyepiece holder          | 45° inclination, 360° horizontal rotation<br>55-75mm pitch |



**Monitor and camera need to be purchased separately**

## ▼ CHARACTERISTICS

The microscope is suitable for a wide range of scenarios. Use a fully coated eyepiece to increase light transmission. A pure copper objective ensures image stability. Adjustable binoculars for different distances.

| Eyepiece | Standard configuration |               | Additional large objective |               |                  |               |                  |               |
|----------|------------------------|---------------|----------------------------|---------------|------------------|---------------|------------------|---------------|
|          |                        |               | 0.5X                       |               | 1.5X             |               | 2X               |               |
|          | Working distance       | 100mm         | Working distance           | 165mm         | Working distance | 45mm          | Working distance | 30mm          |
|          | Magnification          | Field of view | Magnification              | Field of view | Magnification    | Field of view | Magnification    | Field of view |
| 10X/20   | 7X                     | 28.6          | 3.5X                       | 57.1          | 10.5X            | 19            | 14X              | 14.3          |
|          | 45X                    | 4.4           | 22.5X                      | 8.9           | 67.5X            | 3             | 90X              | 2.2           |



Fully coated eyepiece  
for increased light transmission

Suitable for various scenarios



LED halogen lamp



LED light adjustment knob


Pure copper objective to ensure image stability



TRINOCULAR VERSION WITH TV TUBE  
EXPANDABLE ELECTRONIC EYEPIECE CCD



ORIGINAL PHOTO

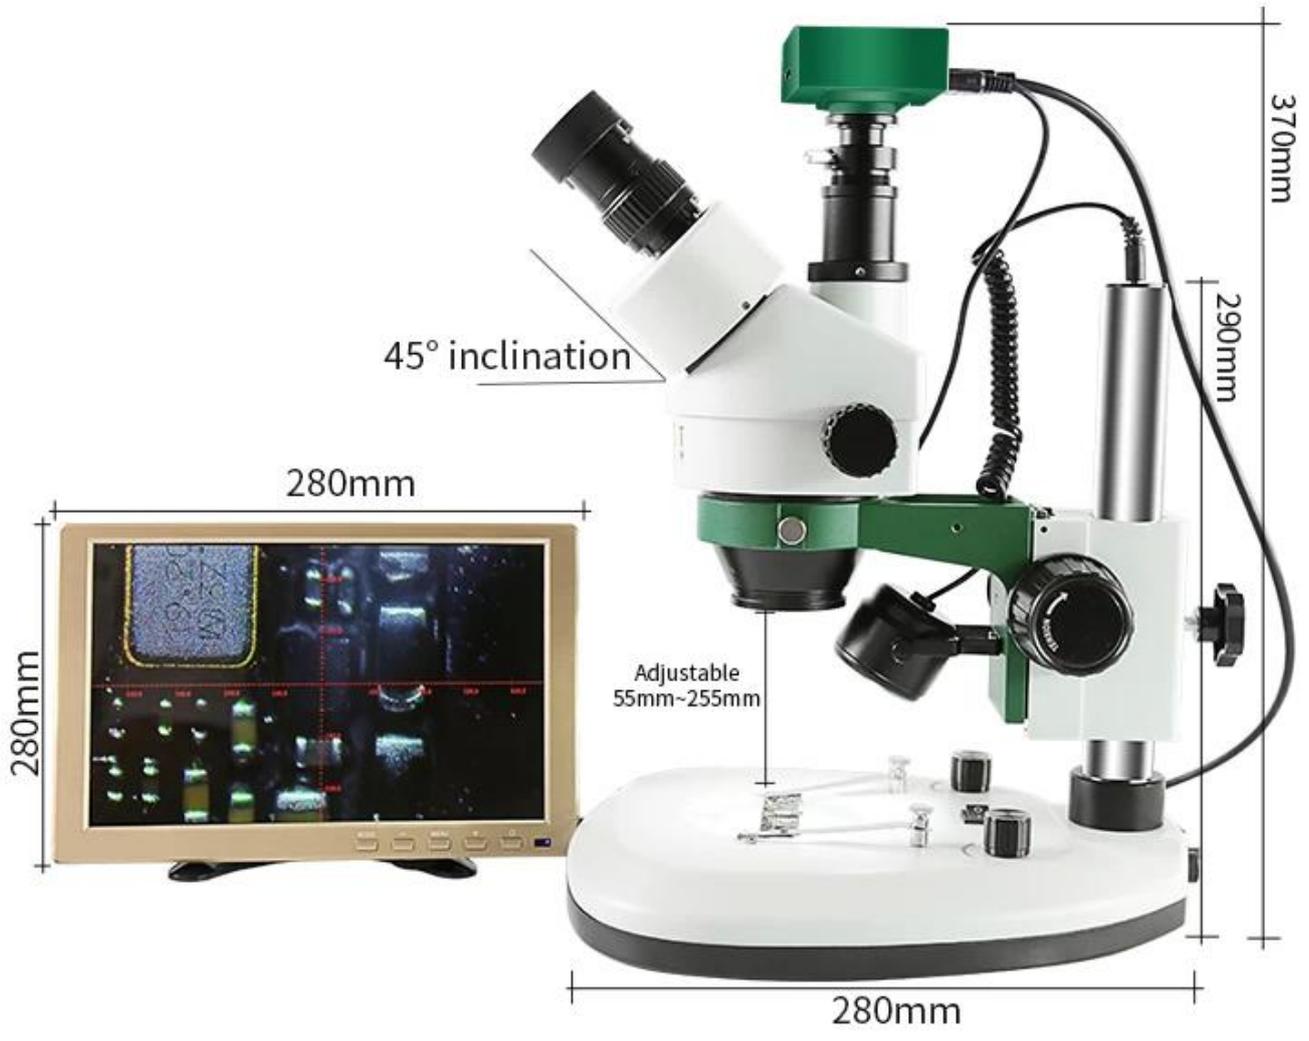



Adjustable binocular tube

# SHIPPING LIST



1.EYEPIECE PARTS

3.10/20X EYEPIECE X2

5.THE RACK

7.BLACK AND WHITE DOUBLE-SIDED MAT

8.THICK LARGE CARTON

2. FOCUSING BRACKET

4. EYEPIECE COVER

6.INSTRUCTIONS

9.THICKENED LARGE FOAM BOX