

BST - 3 鉗子 鉗子 plier 鉗子 鉗子 鉗子 鉗子 鉗子 鉗子

■ ■ ■ ■ ■ ■ ■ ■

鉗子 鉗子, 鉗子 鉗子, 鉗子 leefover 鉗子 鉗子 鉗子 鉗子 鉗子 鉗子.

鉗子 鉗子 鉗子 鉗子.

IC 鉗子 鉗子 鉗子 鉗子

鉗子 鉗子.

鉗子 鉗子 鉗子 鉗子 鉗子 鉗子.

鉗子 鉗子 鉗子.

D.I.Y 鉗子 % s 鉗子 鉗子 鉗子.

■ ■ ■ ■ :

鉗子 : 鉗子 鉗子

鉗子 : 75 # 鉗子, 鉗子, Cr-V 鉗子

鉗子 : 鉗子 鉗子, 鉗子 鉗子, 鉗子 鉗子 鉗子 鉗子

鉗子 鉗子 : 鉗子

鉗子 鉗子 : PVC

鉗子 鉗子 : OEM, ODM

PRODUCT DISPLAY



PRODUCT SIZE

Material:high quality alloy steel(60CR-V)

Process:using repeated forging,the surface is polished after grinding and processing by precision machining

Hardness:the overall hardness is HRC38-42 the blade hardness is HRC56-62

Shear capacity:HRC20 below

Hard wire Φ 1.5mm

soft copper wire,aluminum wire Φ 0.1-2.0mm




PRODUCT DETAILS



Front



Back side

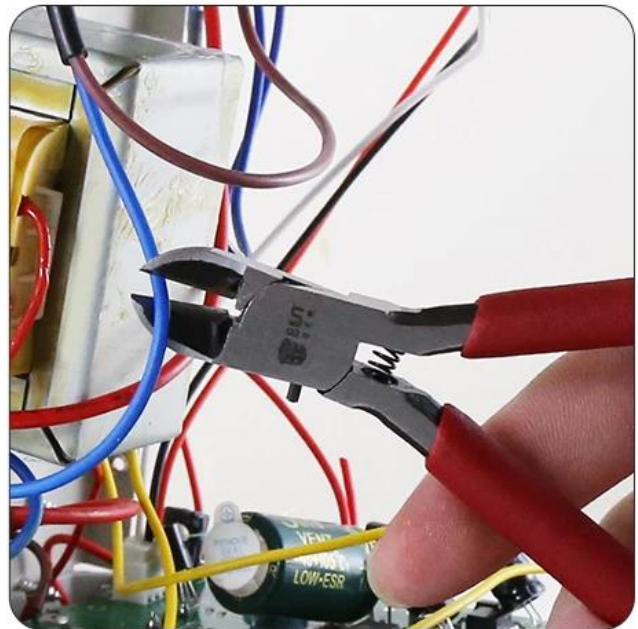

User manual

Warning

This model is not insulated tools. Please use it when power off.

Attention

- ④ To protect user safe, please use protective glasses.
- ④ As the cut material will fly out, make sure no one beside you and no easy damaged things beside you, then begin working.
- ④ This product is not a dedicated pressure equipment.
- ④ When stored, please assure the blade at the closed state and can not be touched by children.
- ④ Do not let the plier tip rub something.
- ④ Please do not directly touch the blade part with hand.
- ④ Do not use in cutting hard materials and steel wire, etc.
- ④ Do not use the pliers above its cutting capability and coarse wire.

PRODUCT PHOTOGRAPH



PRODUCT PACKAGING


WEIGHT:91G



180MM

FRONT

75MM

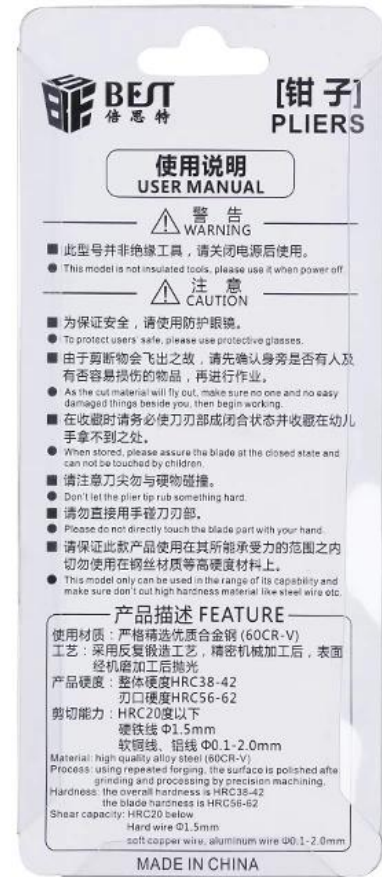

BACK