




PRODUCT DETAILS

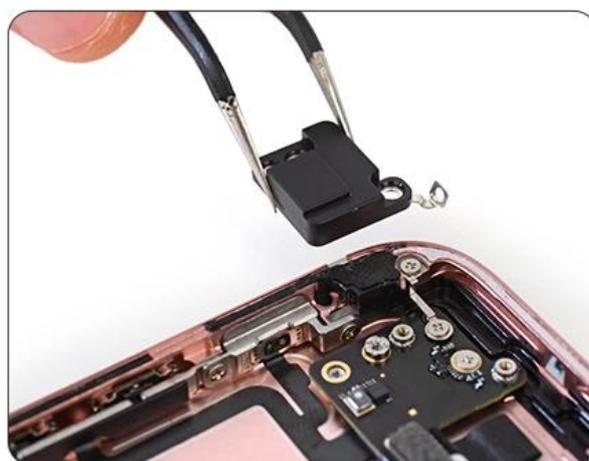

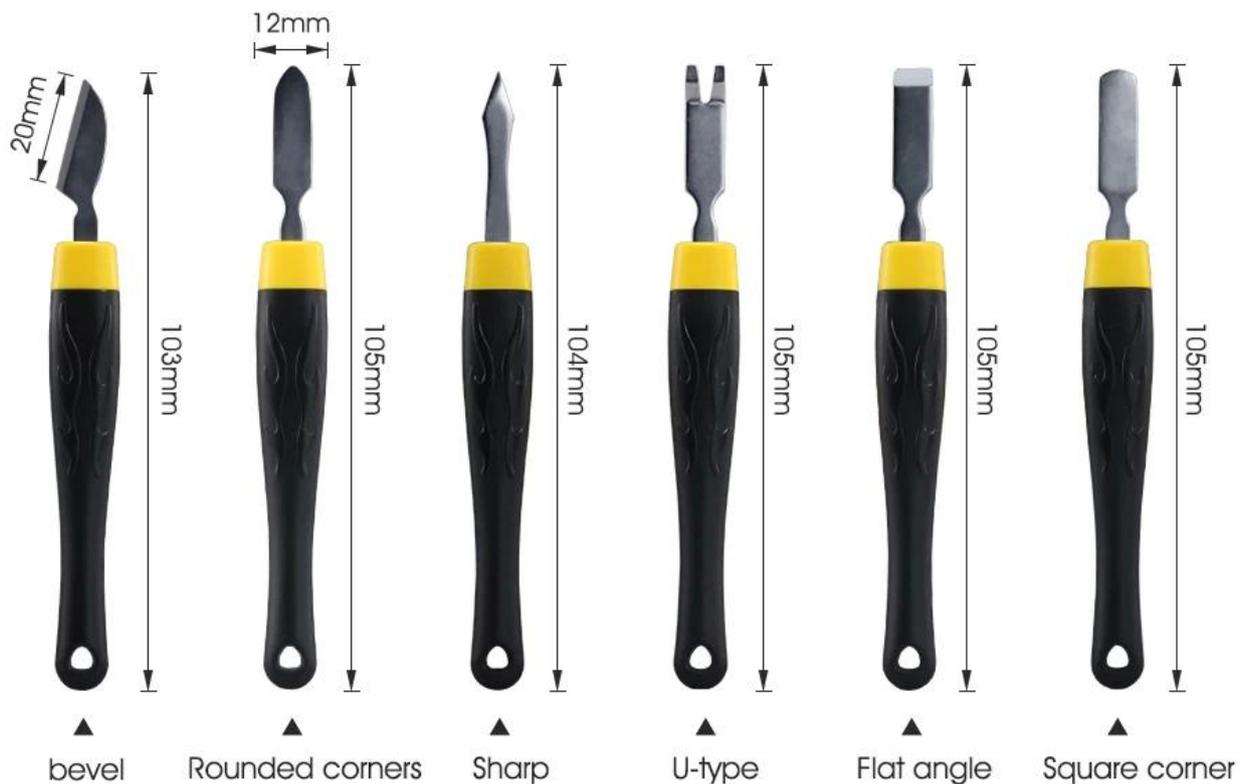

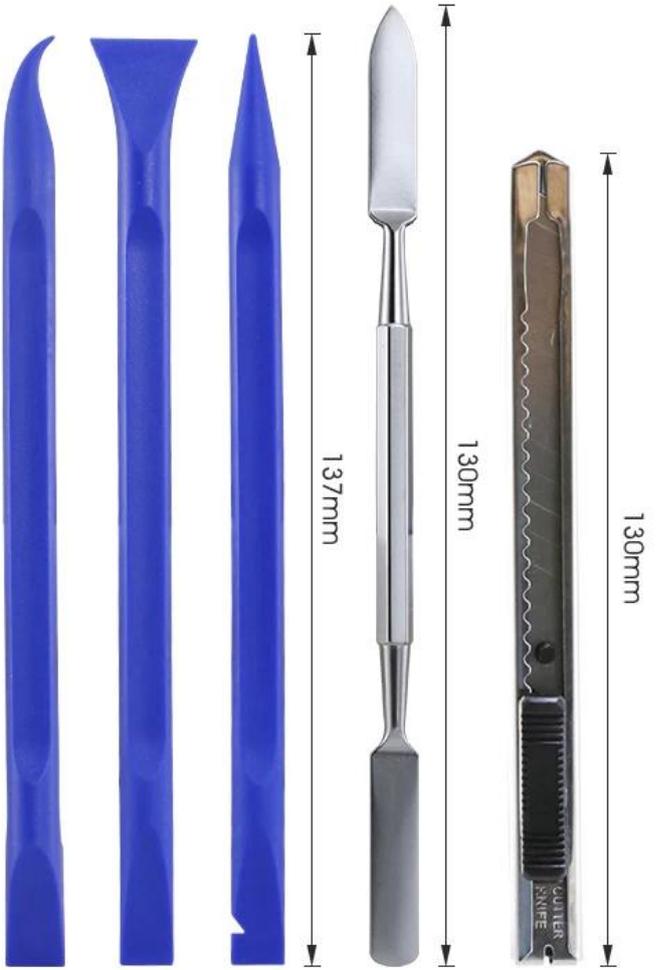

BST-118-41PCS

Product Content:

○ 2.5 ○ 3.0 ○ 3.5 ○ 4.0 ○ 4.5 ○ 5.0 ○ 5.5

⊕ PH2 ● H1.3 ● H1.5 ● H2.0 ● H2.5 ● H3.0 ● H4.0


● H4.5 ● H5.0 ● H6.0 ☉ U2.0 ⊕ 2.0 ⊕ T1 ⊕ T2

⊕ T3 ⊕ T4 ⊕ T5 ⊕ T6H ⊕ T7H ⊕ T8H ⊕ G3.8


⊕ G4.5 ⊕ PH0000 ⊕ PH000 ⊕ PH00 ⊕ PH2 ⊖ 1.5 ⊖ 2.0


⊕ 0.8 ⊕ 1.2 ⊕ Y000 ⊕ Y1 ⬡ 1/4 4

handle
Material: aluminum alloy






Felxible extension rod Bits:27mm

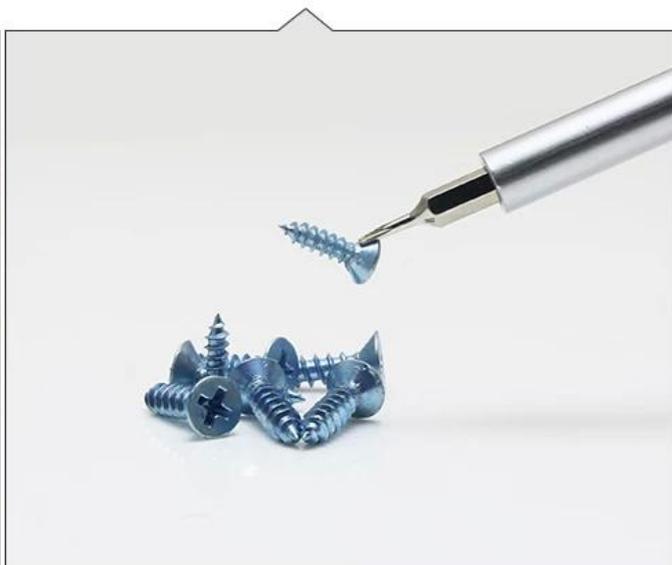

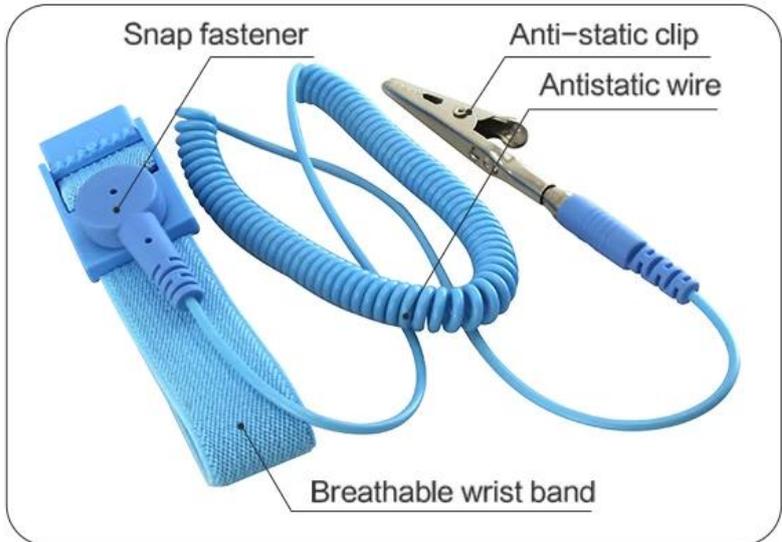


Anti-static wrist

- ★ Conducting electrostatic properties of wristbands and permanent
- ★ Slingshot line ends injection head with the PVC bei material

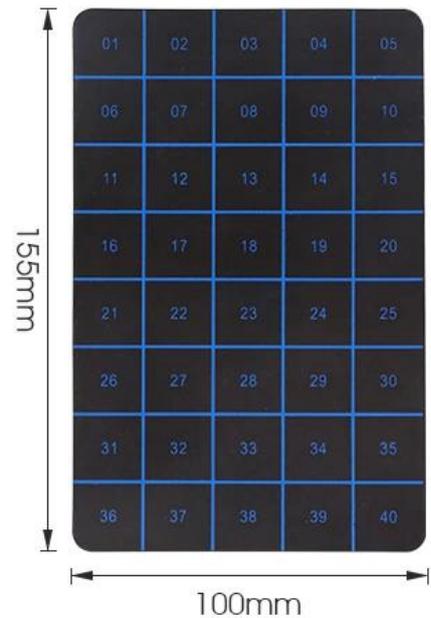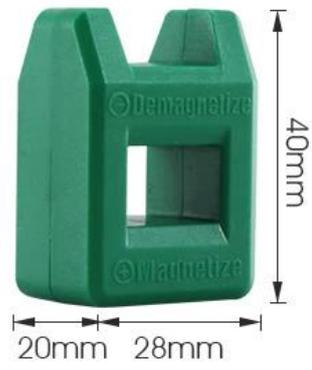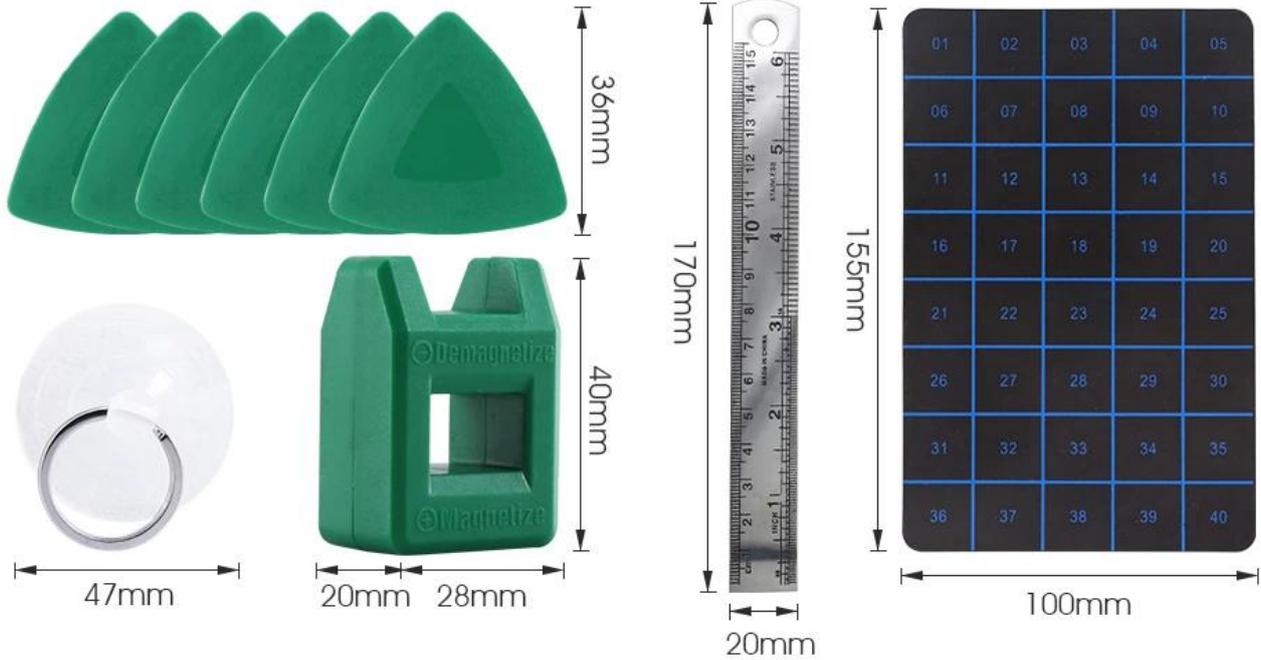

PRODUCT PHOTOGRAPH

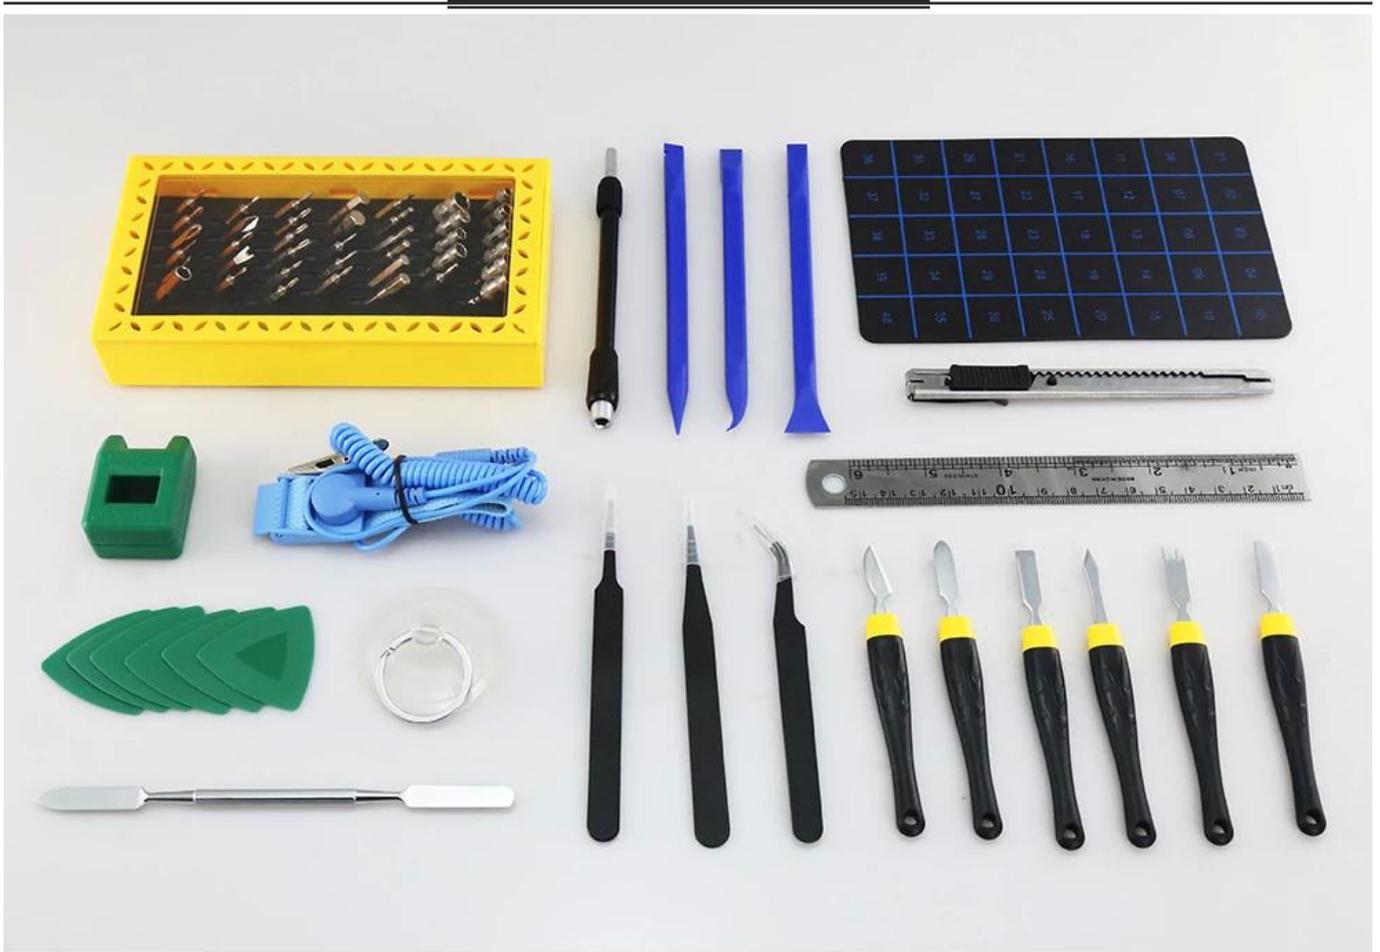

PRODUCT PACKAGING

WEIGHT:910G



