BST-3515A 솔더링 솔더 솔더 제거 와이어 솔더 와이어 **3.5mm** 흡입 라인 **1.5m** 길이 **Wick / Soldering Accesso**

□품 설□

1. 제거 할 땜납 위에 desoldering wick을 놓은 다음 가열되지 않은 땜납으로 가열 된 soldering iron tip을 밀어 넣습니다. 솔더가 흡수됩니다.
2. 땜납이 흡수 된 후 솔더링 제거 땜납을 제거하십시오.
3. 니퍼를 사용하여 심지의 사용 된 부분을 차단합니다.
4. 땜납이 완전히 제거되지 않으면 1 2 3 단계를 반복합니다. 납땜의 종류에 따라 흡수성이 다를 수 있습니다. Sn63 % 및 60 % (주석 함량)는 우수한 흡수성을 갖습니다.

□모:

정밀도 직조에서 1.High 질 합금 구리 철사.

2. 땜 납 exessess에서 주석 제거 산화 및 부식에 대 한 저항.
3.Thermal 전도율, 주석 효과는 매우 좋은, 주석 흡입 청소, 낮은 잔재입니다.
4. 정밀 회로 사용에 적합합니다.

PRODUCT DISPLAY

PRODUCT SIZE

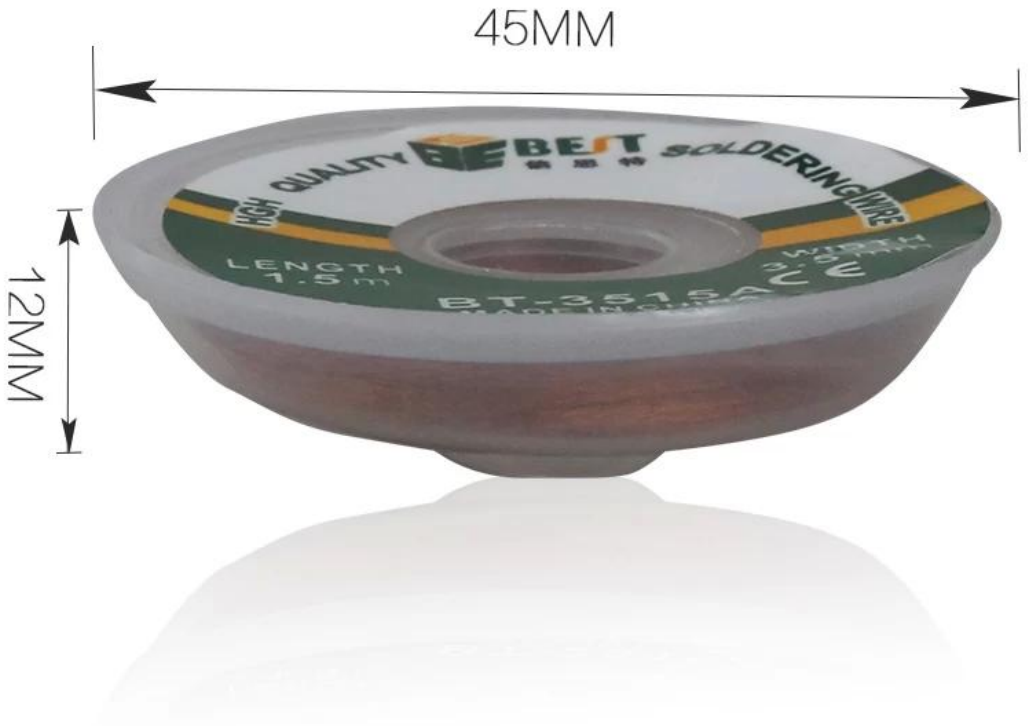

PRODUCT FEATURES

FRONT

BACK

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

WELGHT:7.5G

LENGTH:1.5M
WIDTH:3.5MM

BEST
SOLDERING WIRE
HIGH QUALITY
LENGTH 1.5m
WIDTH 3.5mm
BT-3515A
MADE IN CHINA

BEST
QUALITY
HIGH
SOLDERING WIRE
LENGTH
1.5m
WIDTH
3.5mm
BT-3515A
MADE IN CHINA