

PRODUCT PHOTOGRAPH





PRODUCT SIZE



PRODUCT DISPLAY



Display bit: 3 1/2 bits

Accuracy: + 0.5%

Input impedance: 10M



Maximum display: 1999

Power supply: 9V (6f22)

Mode of operation: manual range

PRODUCT PACKAGING

WEIGHT:330G

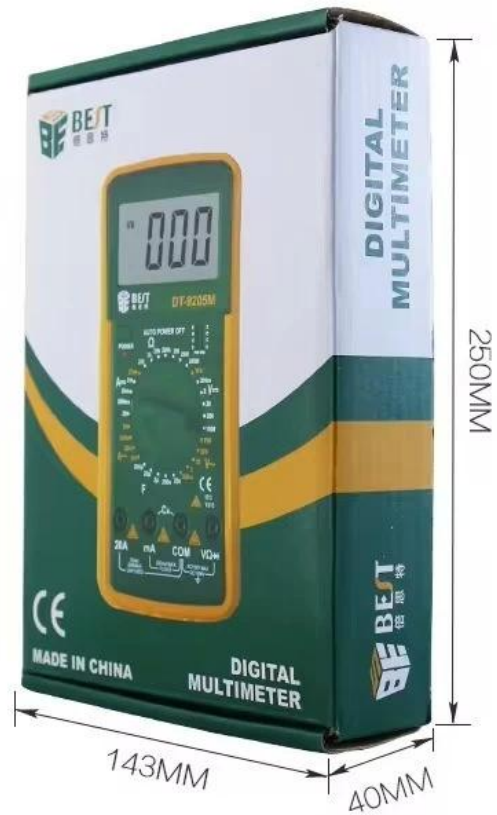

PARTS

PACKING

□□ □□□□

□□ □□	□□.	□□□
□□ □□	200mV/2V/20V/200V/1000V	±(0.5%3)
□□ □□	200mV/2V/20V/200V/700V	±(0.8%5)
□□ □□	2mA/20mA/200mA/20A	±(0.8%10)
□□ □□	2mA/20mA/200mA/20A	±(2.0%5)
□□	200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ/200MΩ	±(0.8%3)
□□ □□	200uF/20uF/2uF/200nF/20nF	±(2.5%20)
□□□ □□	9205M	
□□□□, □□□ □□□	√	
□□□□ □□ □□	√	
□□□ □□	√	
□□ □□	√(□□□□ □□ □□)	
□□ □□	√	
200mA □□ □□	√	

20A 00 00

00 00

00 0000

00

00 00000

LCD

0

√

√

10MΩ

00 00

19990

59×31mm

9V(6F22)