Total Magnification:	7X-45X / *7X-90X / *7X-180X / *3.5X-90X / *3.5X-45X			
Continuous zoom ratio:	1:6.5;			
Eyepiece:	High eye point wide angle WF10×/φ20mm; wide angle WF20×/φ10mm (≥90X)			
Observation tube:	Hinged trinocular, 45° tilt, spacing 55-75mm;			
Objective:	Continuous zoom	Objective:	0.7X-4.5;	
Diopter:	Binocular vision adjustment range ±6;			
Support:	Double pole gimbal (WX type);			
Bottom seat:	Large base (V type), 200 × 245mm;			
Field of view diameter:	φ5mm-φ30mm;	Focus mechanism:	XTWZ bracket	
Package:	Foam + carton;			
Others:	With ring light interface; comes with TV interface; LED ring light set of 5500 color temperature, 8W brightness adjustable			
Optional:	Wide-angle eyepiece 20X; * Increase objective lens 2X; * Increase objective lens 0.5X		Weight:	21.40KG
Working distance:	It is 100mm when no additional objective lens is added, plus 165mm for adding 0.5X additional objective lens, 30mm for adding 2X additional objective lens			

Shenzhen Shiliyang Technology Co., Ltd.

PRODUCT DETAILS

Shenzhen Shiliyang Technology Co., Ltd.

Focusing

Shenzhen Jinyang Technology Co., Ltd.

Eyepiece
WF10X20mm

Shenzhen Jinliyang Technology Co., Ltd.

Made of pure copper, durable
Objective lens
2X

Adjustable
Suitable for different groups of people

Shenzhen Jinliyang Technology Co., Ltd.

PRODUCT PHOTOGRAPH

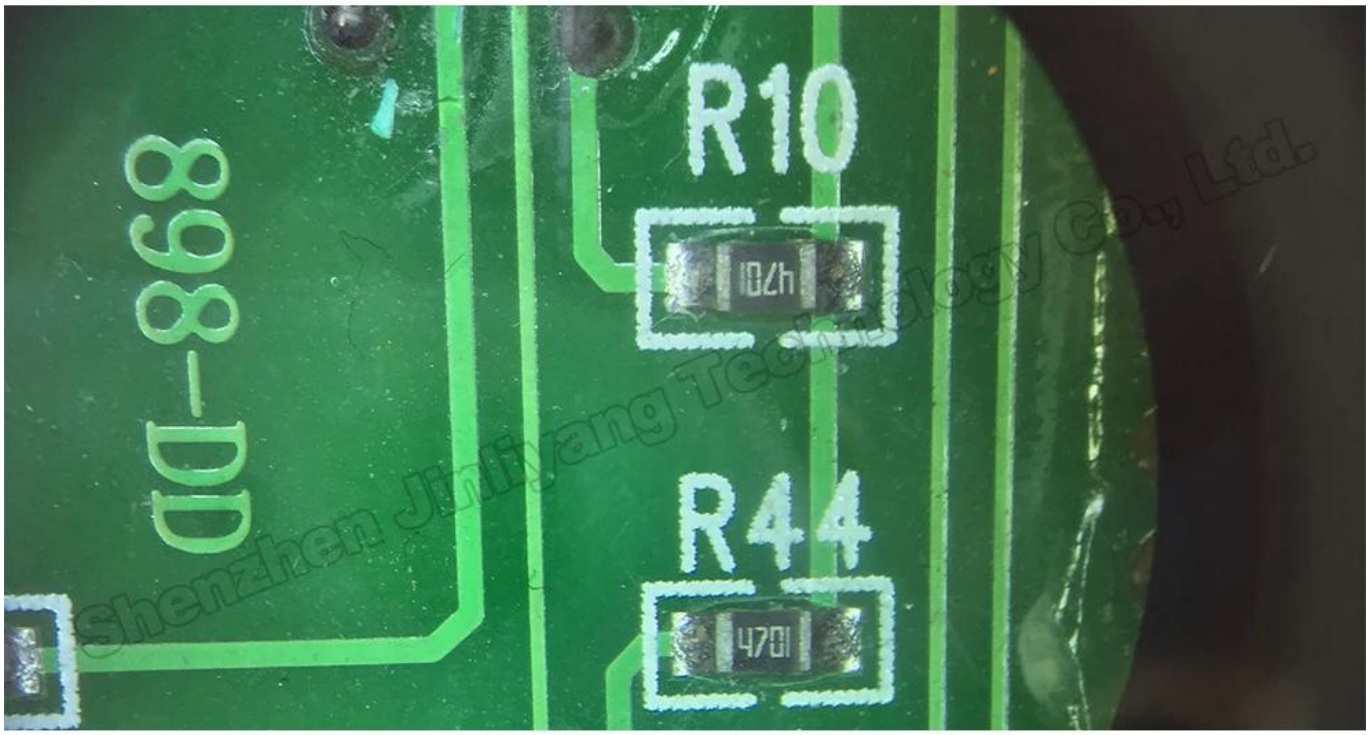

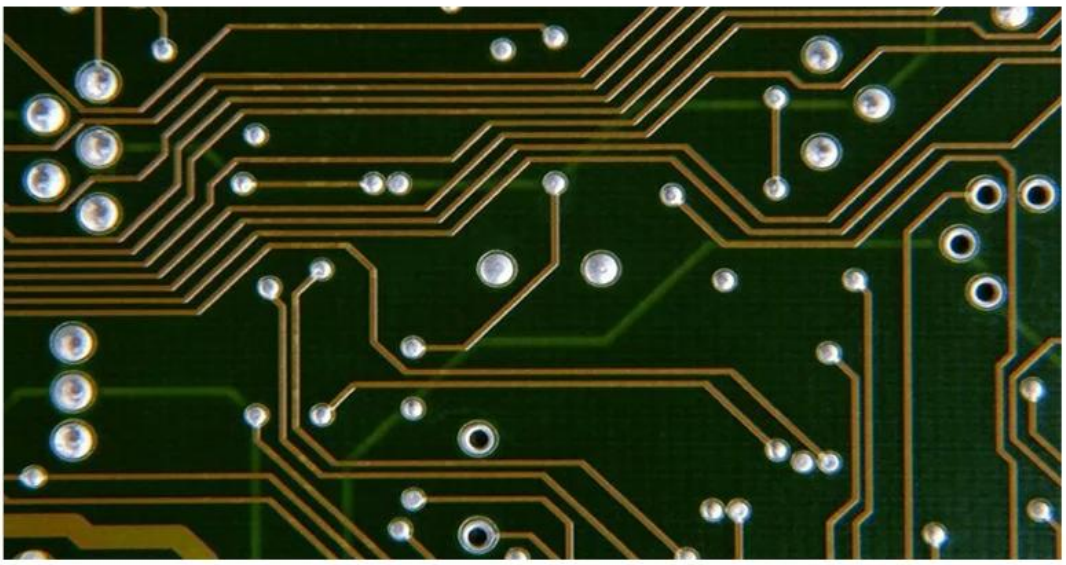

Circuit board

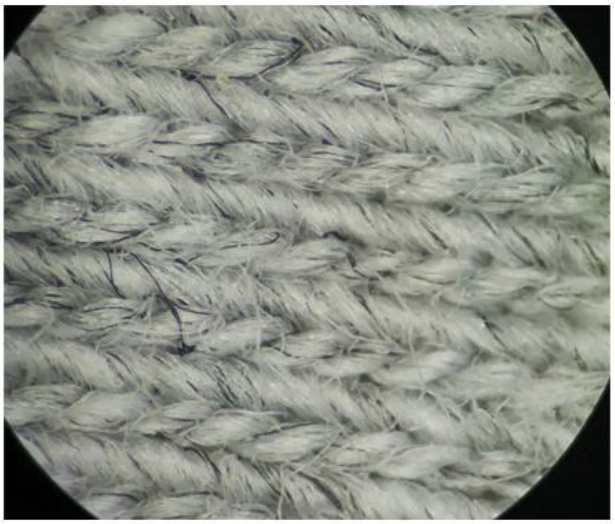

Fiber

Bud

Precision instrument