

BEST-858D 110/220V Soldering Station LED Digital Solder Iron Desoldering Station BGA Rework Solder Station Hot Air Gun

Product Description


- 1.LED digital display heat gun 110V/220V optional
- 2.Temperature control 100°C-480°C
- 3.Brushless air blower and soft airflow
- 4.Factory price, Trade Assurance supplier
- 5.Accept small order and OEM order

Usage

- 1.Suitable for unsoldering multiple components,such as SOIC,CHIP,QFP,PLCC and BGA etc
- 2.Applicable for shrinking,heating,depainting,defrosting,preheating and rubber soldering etc.

PRODUCT DISPLAY

Single-digit lead-free spiral heat gun

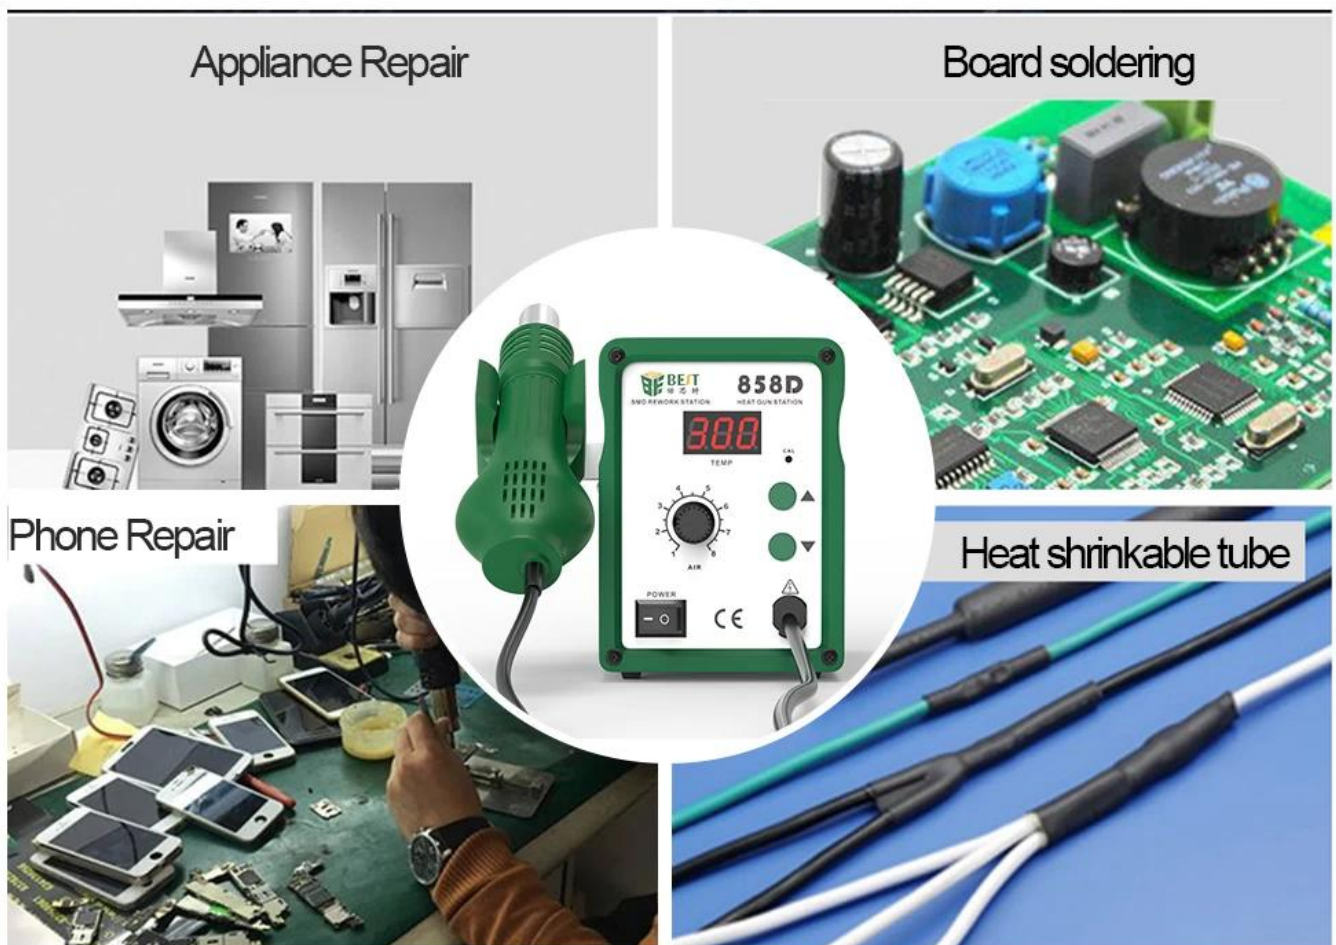

PRODUCT SIZE



PRODUCT DETAILS




PRODUCT FEATURES




Front



Behind

Brand:			Name:		Single-digit lead-free spiral heat gun
Model:	BST-858D		Rated voltage:		AC 110/220V 50/60HZ
Rated power:	650W		Airflow:		120L/min (Max)
Air gun temperature range:			100 ° C - 480 ° C		
Weight(including packaging):		1.7KG	Size:	Packing:	L265*W170*H145mm
				Machine:	L100*W148*H133mm
Accessories:	858D, wind gun nozzle 5, 8, 10 mm, power cord, air gun handle, wrench, starter				
Features:	1. High temperature resistant silicone wire				
	2.Imported ceramic heating core, the handle is made of high temperature resistant silicone wire.				
	3. LED air gun temperature display , temperature is accurate and stable, clearly visible				
	4. When the air gun is placed on the bracket, it will automatically enter the cooling and cooling standby. When the air gun is picked up, it will heat up quickly.				
	5. High power, fast heating, anti-static, temperature adjustable				

High-quality heating body warming fast
Incoming ceramic heater, fast heating,
high temperature, long life, real material

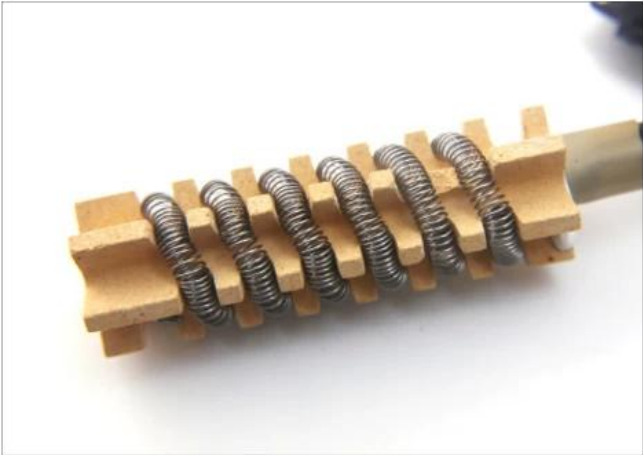

Rapid temperature rise
durable Intelligent, put back on the
bracket to automatically cool down




temperature resistant
silicone wire.



100°C~480°C

Pure copper transformer

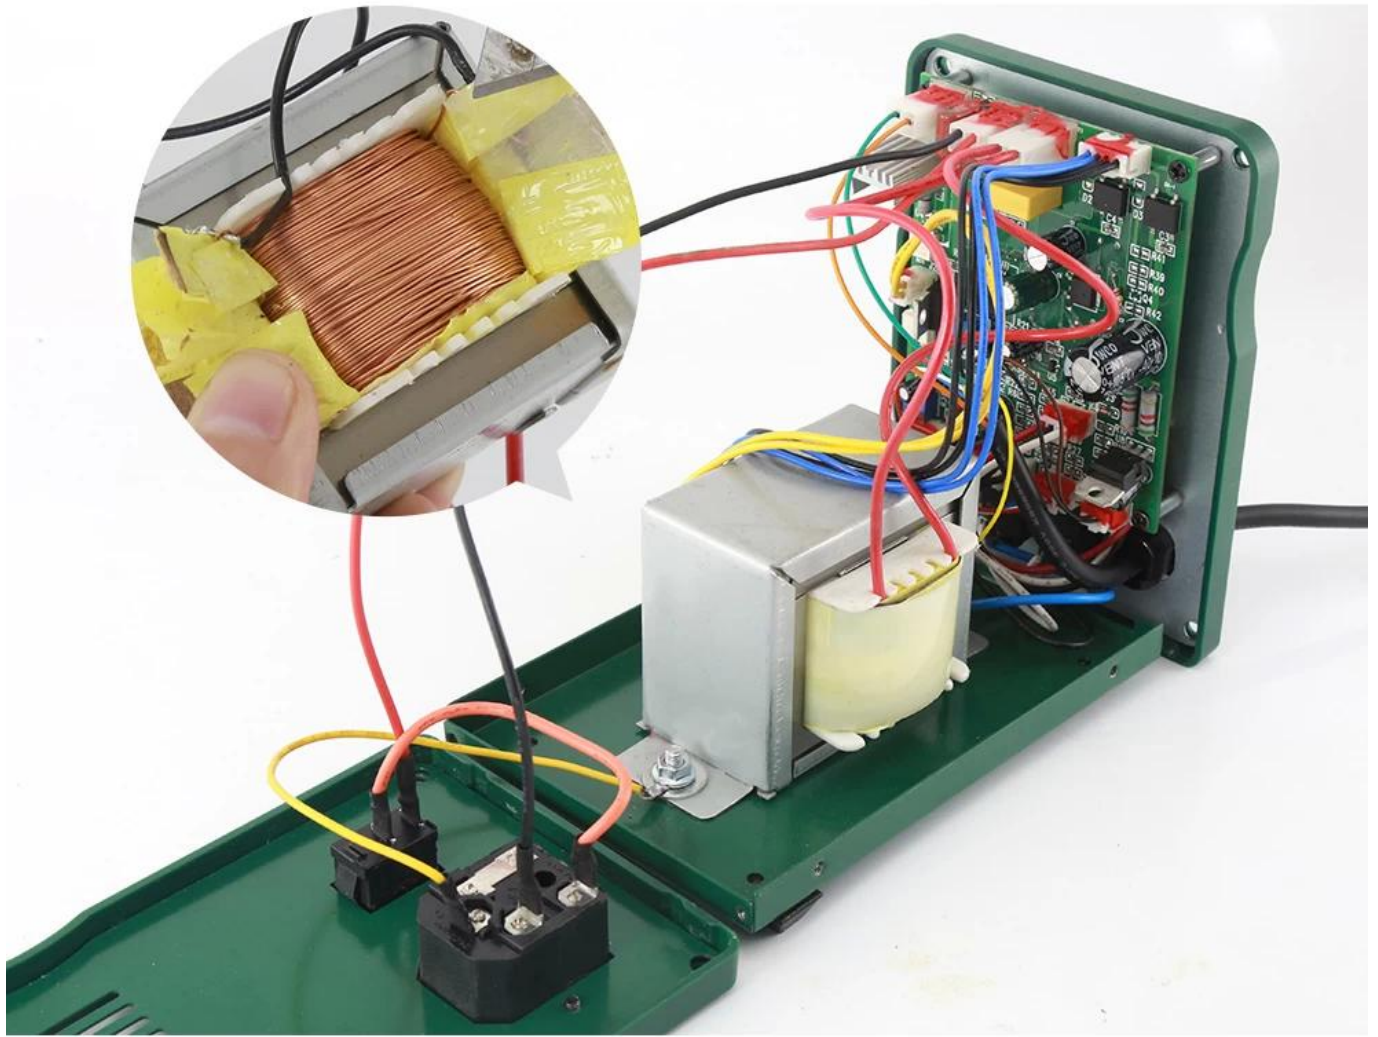

PRODUCT PACKAGING



Package:
265*170*145mm



BST-858D



Power cable



Wind gun nozzle
5, 8, 10mm



Wrench



Starter