



1	New shock-proof sleeve, streamlined design, comfortable to the touch
2	Large screen display, clear font
3	Metal shielding plate, anti-magnetic, anti-interference ability
4	Full protection function, anti-high voltage ignition circuit design

Fuction	Range	Accuracy
DC voltage	4V/40V/400V/500V	± (0.5%+3)
AC voltage	4V/40V/400V/500V	± (1.0%+3)
DC	999.9mA/9.999A	± (2.0%+4)
AC	999.9mA/9.999A	± (1.0%+3)
Resistance	4Ω	± (1.5%+3)
	40Ω/400Ω	± (0.5%+3)
	4Ω/40Ω	± (1.5%+3)
Capacitance	20nF/200nF	± (10%+40)
	2uF/20uF/200uF	± (2.5%+20)
	2000uF	± (5%+10)
On and off		
NCV detection		
Frequency response in AC mode: 40Hz~1khz		

Product number	BST-58F
LCD	4000word
Range	automatic
Material	ABS-PCV
Sampling rate	3 times / sec
True RMS	✓
Data retention	✓
Screen backlight	✓
Flashlight lighting	✓
Low battery prompt	✓
Automatic shut-down	✓
parameter	
product weight	133g
Product Size	126*61*28mm
power supply	1.5V AAA battery*2
working environment	Temperature0~40°C Humidity<75%
Storage environment	Temperature-20~60°C Humidity<80%

AUTOMATIC

—INTELLIGENT MULTIMETER—





▼ CHARACTERISTICS

This product is used for maintenance testing of various electronic products. It has metal shielding plate, anti-magnetic and anti-interference performance; full protection function, anti-high voltage ignition circuit design, automatic gear position recognition and more convenient operation.

Fuction	Range	Accuracy
DC voltage	4V/40V/400V/500V	± (0.5%+3)
AC voltage	4V/40V/400V/500V	± (1.0%+3)
DC	999.9mA/9.999A	± (2.0%+4)
AC	999.9mA/9.999A	± (1.0%+3)
Resistance	4Ω	± (1.5%+3)
	40Ω/400Ω	± (0.5%+3)
	4Ω/40Ω	± (1.5%+3)
Capacitance	20nF/200nF	± (10%+40)
	2uF/20uF/200uF	± (2.5%+20)
	2000uF	± (5%+10)
On and off	✓	
NCV detection	✓	
Frequency response in AC mode: 40Hz~1khz		


Product number	BST-58F
LCD	4000word
Range	automatic
Material	ABS-PCV
Sampling rate	3 times / sec
True RMS	✓
Data retention	✓
Screen backlight	✓
Flashlight lighting	✓
Low battery prompt	✓
Automatic shut-down	✓
parameter	
product weight	133g
Product Size	126*61*28mm
power supply	1.5V AAA battery*2
working environment	Remperature0~40°C Humidity<75%
Storage environment	Remperature-20~60°C Humidity<80%

PRODUCT INFORMATION



1KH true RMS
NCV induced voltage
AC and DC current
AC and DC voltage
Zero fire line identification
Resistance on and off

Specifically for the following problems

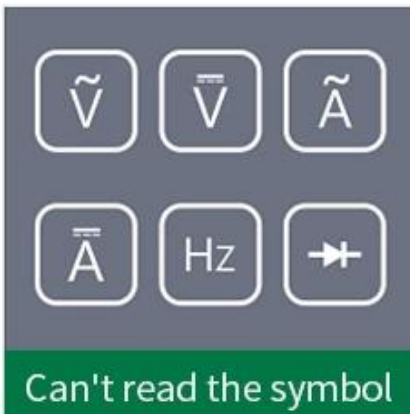

Automatic identification within 3 seconds



1: Long press the yellow button to start the device



2: Automatic measurement of gear position

SCREEN BACKLIGHT
EASY TO READ



NCV Non-contact Test


Long press NCV to enter induction mode NCV sensing area

NCV sensing area



PRODUCT SIZE



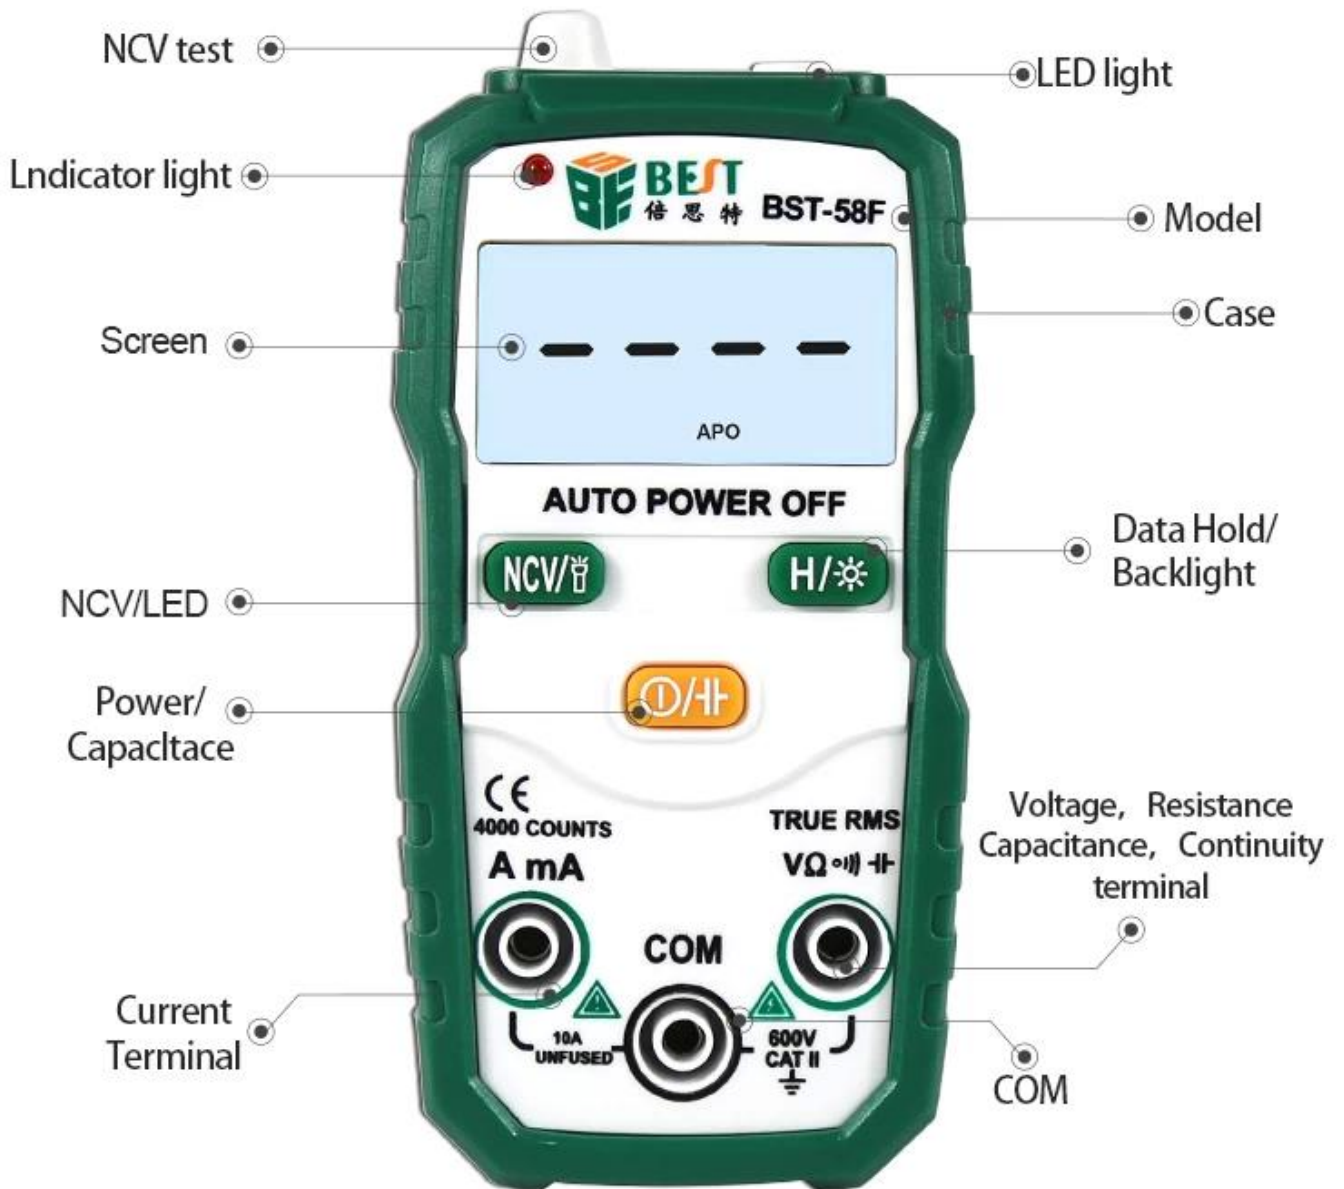

PRODUCT SIZE

On-off test



AC voltage test



DC voltage test



Capacitance test



Diode test



Resistance test

