APPLICABLE TO A VARIETY OF MOBILE PHONE TYPES

Rotary Phone Screen Separator

Suction cup, vacuum strong adsorption, support the market curved screen, straight screen mobile phone disassembly





Simple operation



Precise temperature control



Strong suction



Rapid heating



Built-in air pump

8.8.0

Intelligent digital display

PRODUCT PARAMETERS


000

| Model | BST-B-918 |
|------------------------|-------------------------------|
| Name | Rotary Phone Screen Separator |
| Material | Aluminum alloy |
| G.W. | 2.95kg |
| Power | 400w |
| Voltage | AC220V/240V 50/60HZ |
| Heating mode | PTC heating |
| Scope of application | Within 7 inches |
| Product Size | 150*235*260mm |
| Adjustable temperature | 0-130℃ |

360° rotatable, straight screen curved screen removal


Special heating aluminum material, uniform heating, safer and energy saving



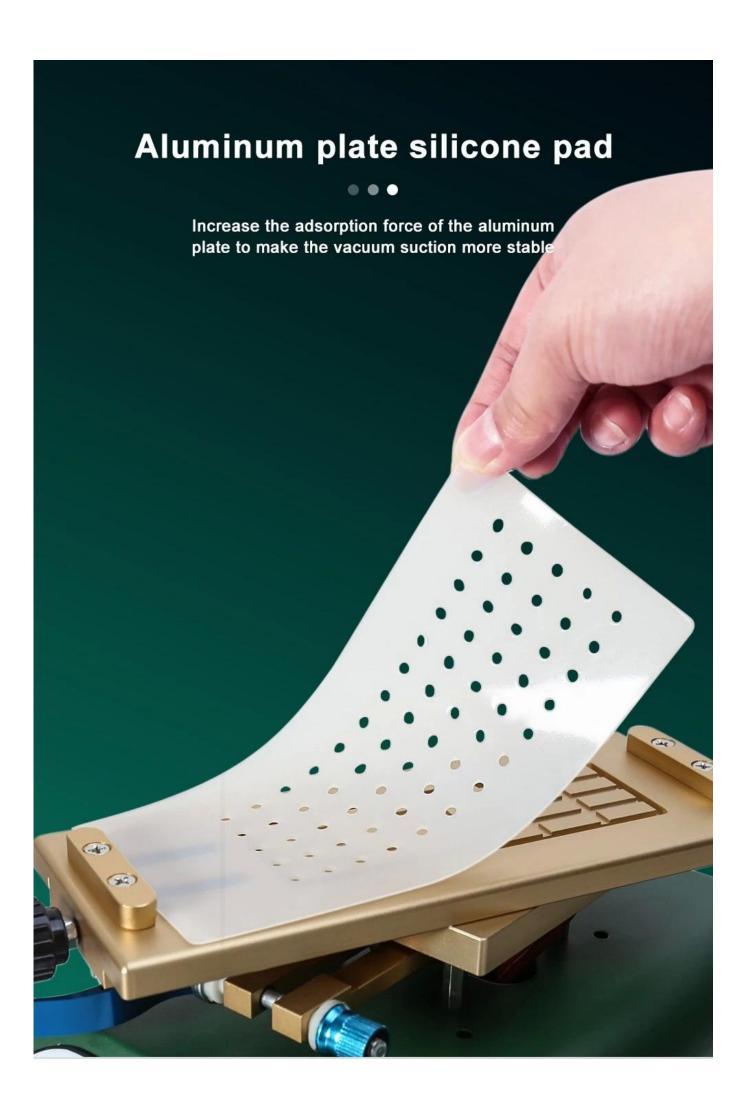

Cooling holes on both sides


Heat dissipation holes on both sides effectively reduce the internal temperature of the fuselage

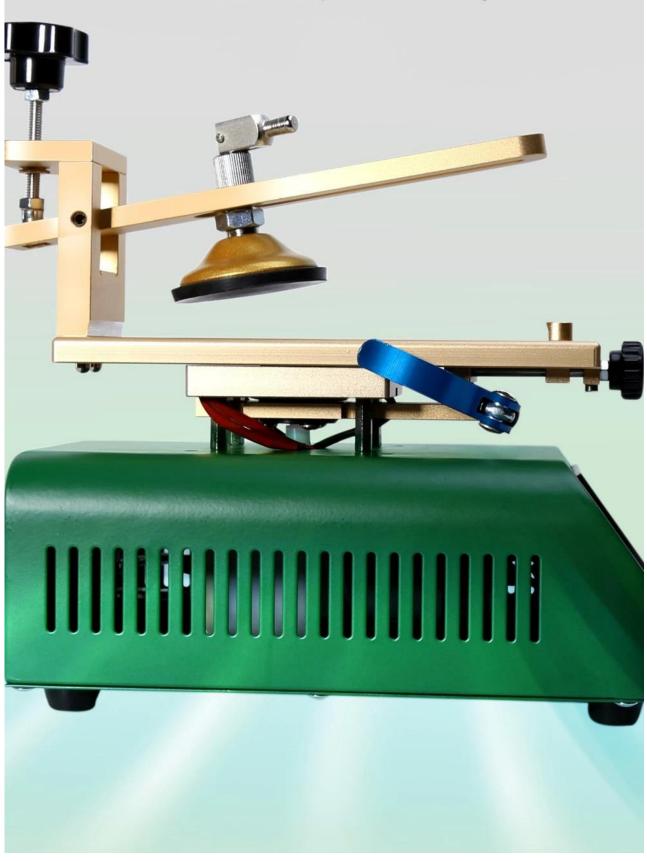



Vacuum adsorption pump




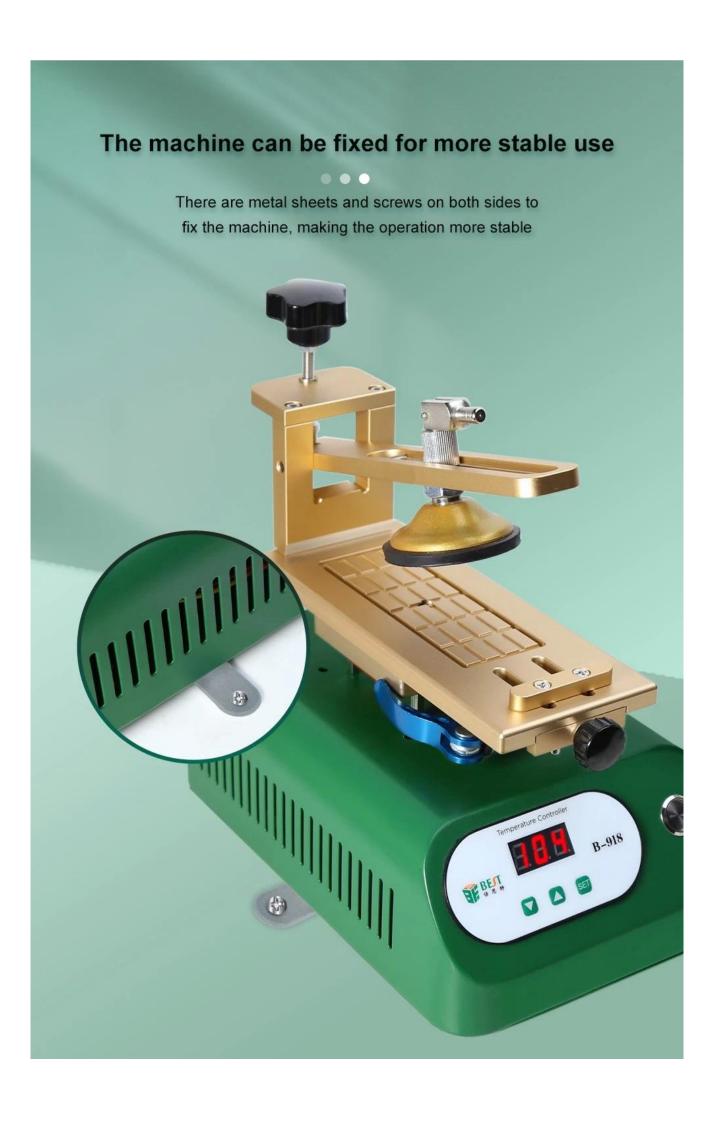

Powerful suction cups to easily disassemble the screen

Scope: 7-inch screen





The bracket can be removed, which can be used for various screen separations, and the cutting is smooth.

Scope: 7-inch screen



Separator product analysis



INSTRUCTIONS

Press the "SET" button, the display number flashes to enter the temperature preset mode, press "▲"Or " ▼" key to adjust the temperature up and down, preset the temperature and "SET" key to confirm.

Tips:

When setting the temperature of the machine, it is recommended that the temperature be preset to 80°C. Too high temperature may damage the screen.




Bottom anti-slip feet

Bottom anti-slip feet for stable use



Product Size

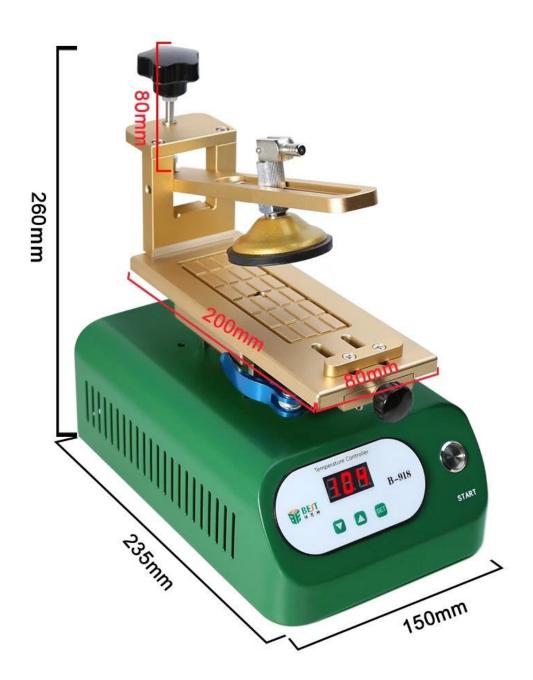

Product details

. . .







