

Support PPS/ PD/QC/ AFC/ FCP/SCP/ PE/ SFCP and other fast charge protocols







# FLASHING IDENTIFICATION AT A GLANCE

The device has 8 high-current charging ports, which can see the current of the interface at a glance



A1 5.08V 0.00W 0.00A A2 5.08V 0.00A 0.00W A3 4.99V 0.00A 0.00W A4 4.99V 0.00A 0.00W A5 5.08V 0.00A 0.00W A6 4.99V 0.00A 0.00W 0.00A C1 5.08V 0.00W C2 4.99V 0.00A 0.00W




闪霸2号



#### 1.8 "LARGE COLOR SCREEN REAL-TIME DISPLAY

Unique fast charging device protocol detection display function, charging protocol is clear

Differential circuit, higher detection accuracy

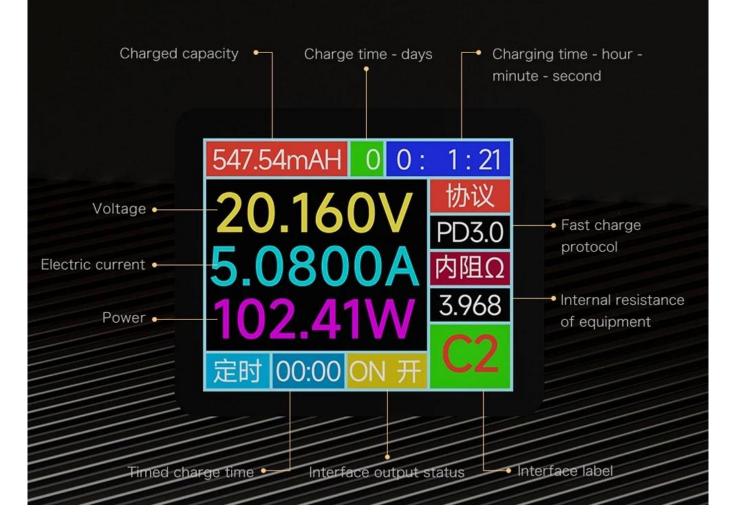








# SECURELY UNLOCK THE SMART FAST CHARGE

Power up to 800W after secure unlocking (use your own power supply board), default maximum 220W

220W/800W



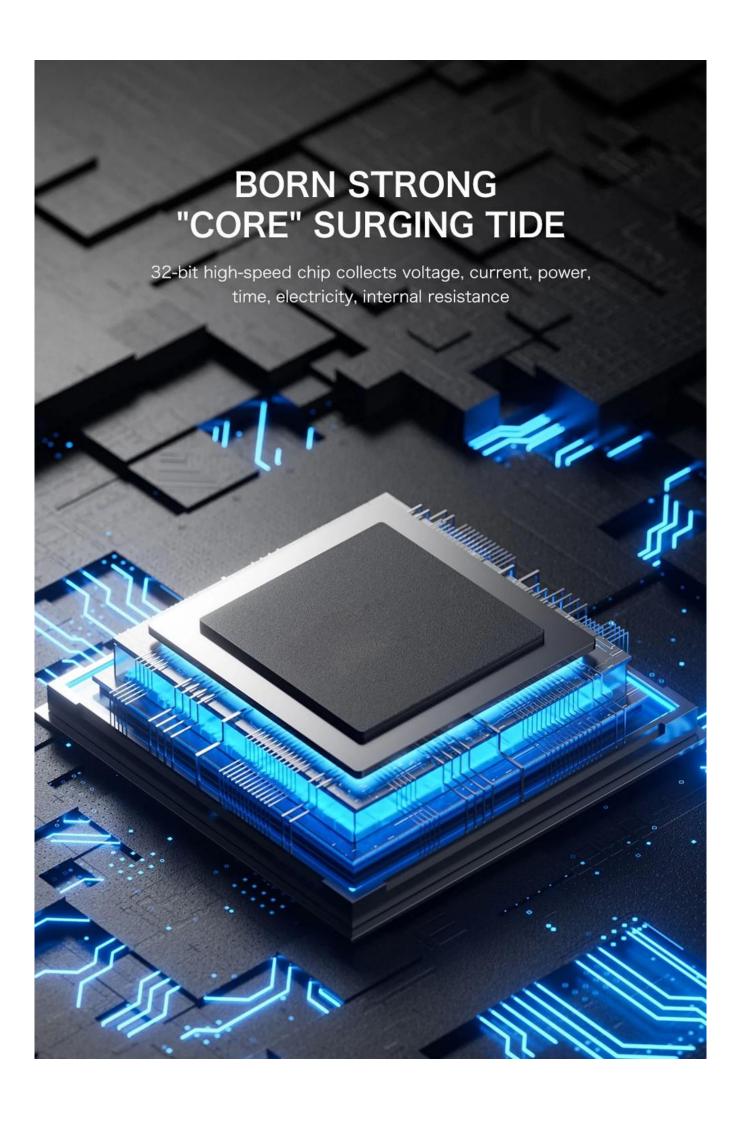

### FUNCTION SUPPORT FREE SETTINGS

Periodic charging | adjustable backlight | sleep switch | clear mode

No space, can be separated power cord, suitable for a variety of environments and plug



Press and hold the key. When the function to be set is displayed, release the key to enter the corresponding setting. Click the key to switch the setting, and hold down for 1 second to save and exit

清除时间与电量模式:

ClearTime and Power Mode: Auto Manual

定时充电 \_通道: ALL TimedCharge CH: ALL 时-Hours:


0 1 2 3 4 5 6 7 8 9 12 24 (00:00 H–M) 时间与电量清除

通道: A3 🐜

Clear charged power and time Channel: A3 NOME

背光休眠: 开 Backlight Sleep: ON 背光设置 Backlight setting

亮度 Leval: 6

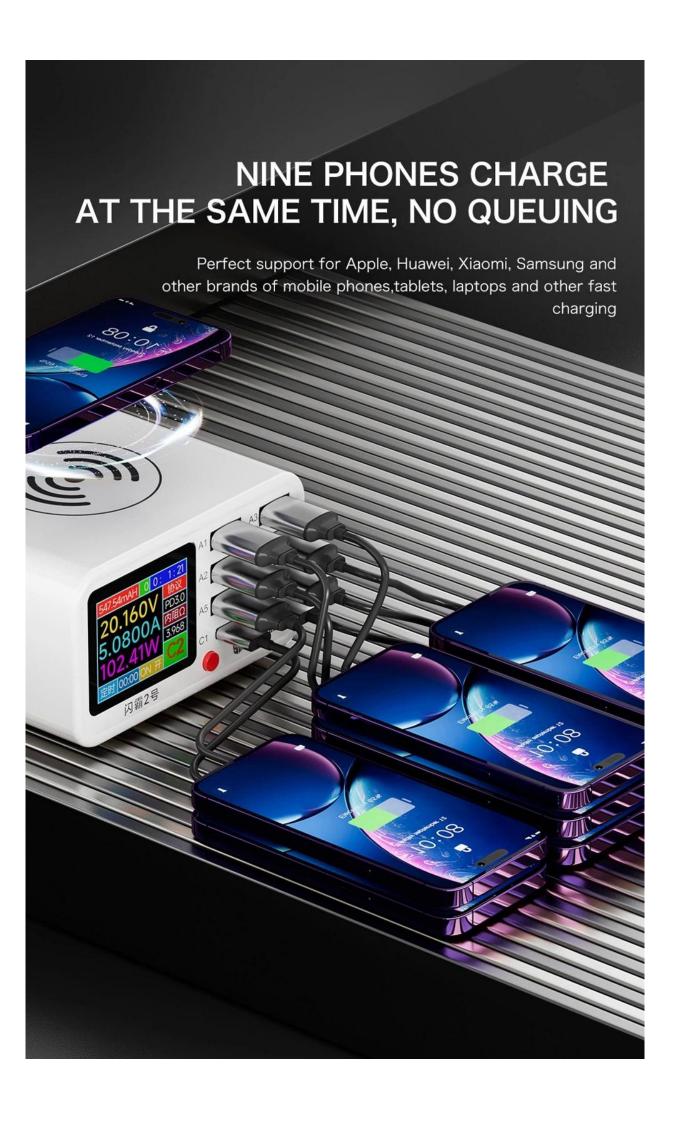

#### PRODUCT INFORMATION

**Product Name** 

Visual USB Charger

Input voltage

110V-220V

Maximum current

12A

Port

maximum voltage

20V

Model number

BST-S2

Output voltage

5~20V-5A

PD power

MAX. 100W

Maximum

current of a single port

5A

