

Nome: placa de ativação de carregamento de bateria

Modelo: BST-J4

Tensão: 4,2 V ~ 4,5 V

Interface de alimentação: Tipo-C

Tamanho da placa: 17\*1.5\*105mm

Tamanho do pacote: 35\*20\*115mm


N.W.:6,0g

G.w.:12,5g

# BATTERY ACTIVATION BOARD FOR IP5-16



**BST-J4**

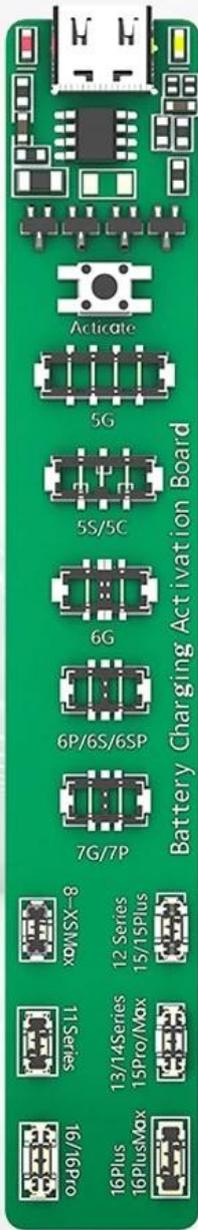


# One Click Quick Activation



Plug on the battery and activate it quickly with just one click


Activation Button

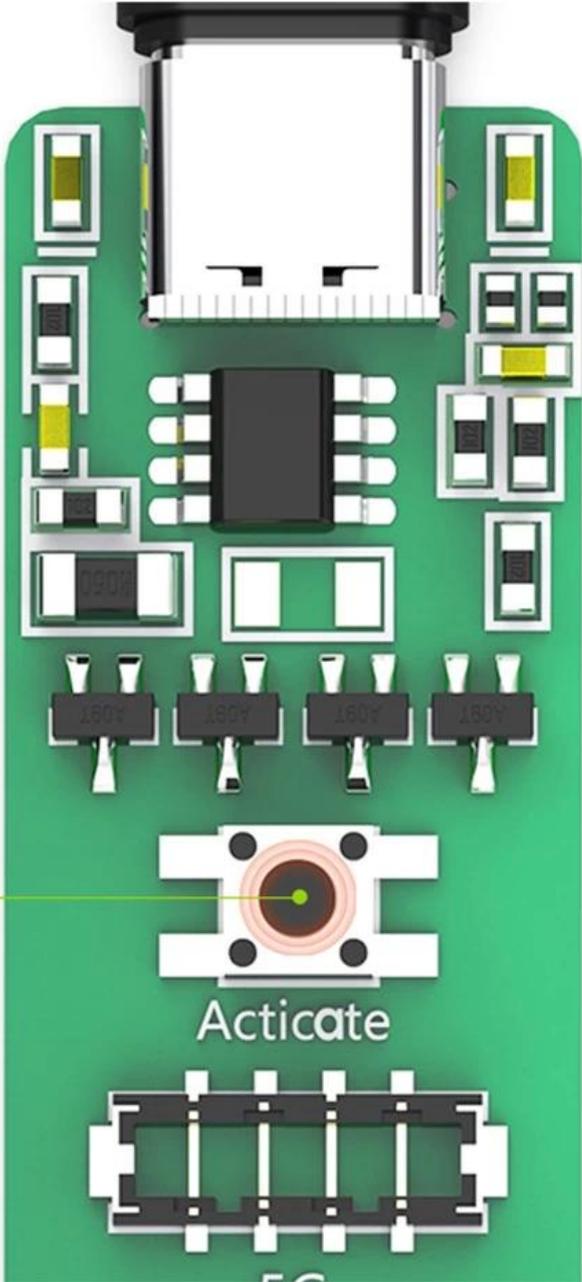

# Overload protection




4.2V regulated output, overload high voltage protection, multiple protection for mobile phone batteries

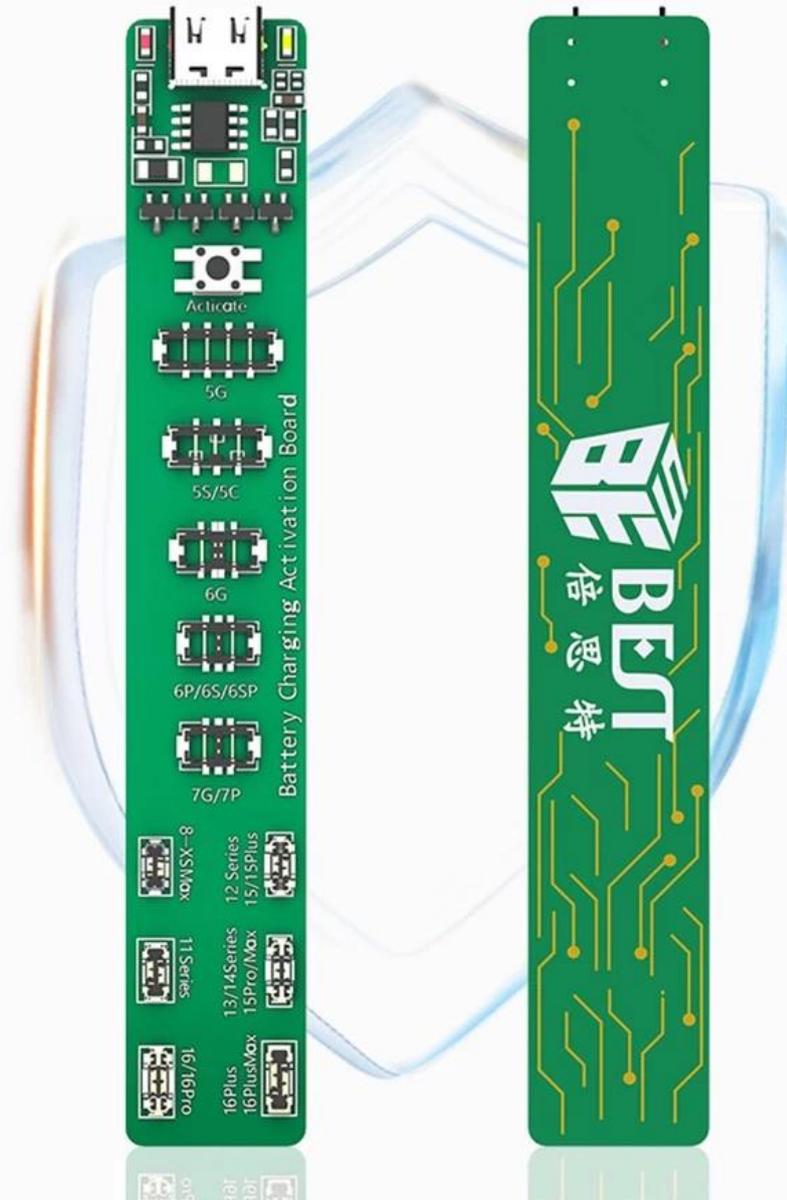

# Automatic power off




After the battery is fully charged, it will automatically power off and the red indicator light will turn off

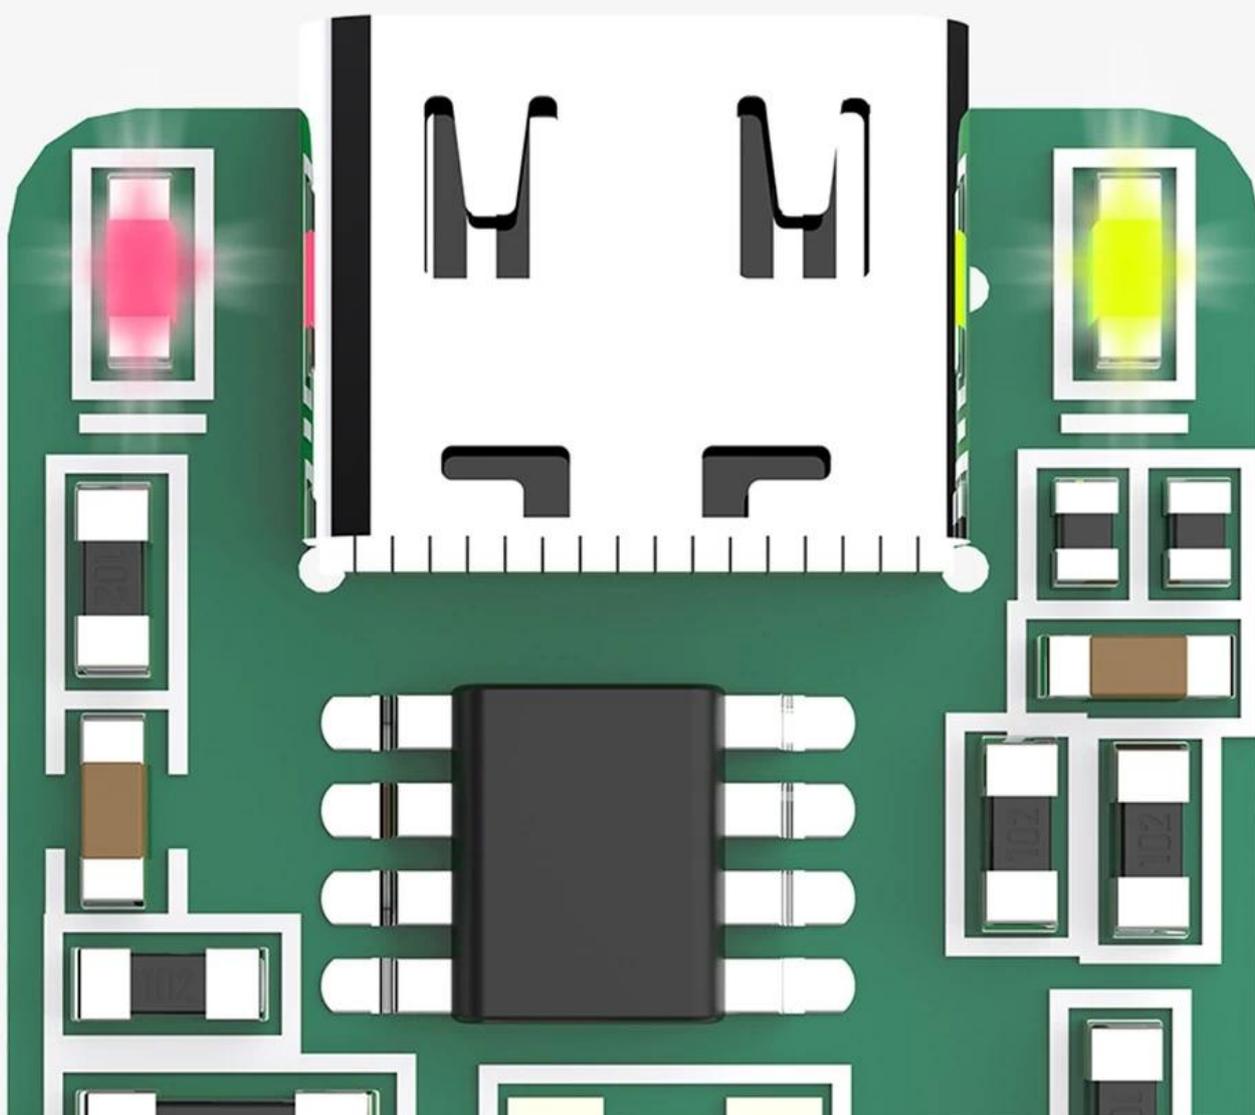

# PD Fast Charging



This battery activation board is equipped with a PD chip to achieve PD fast charging

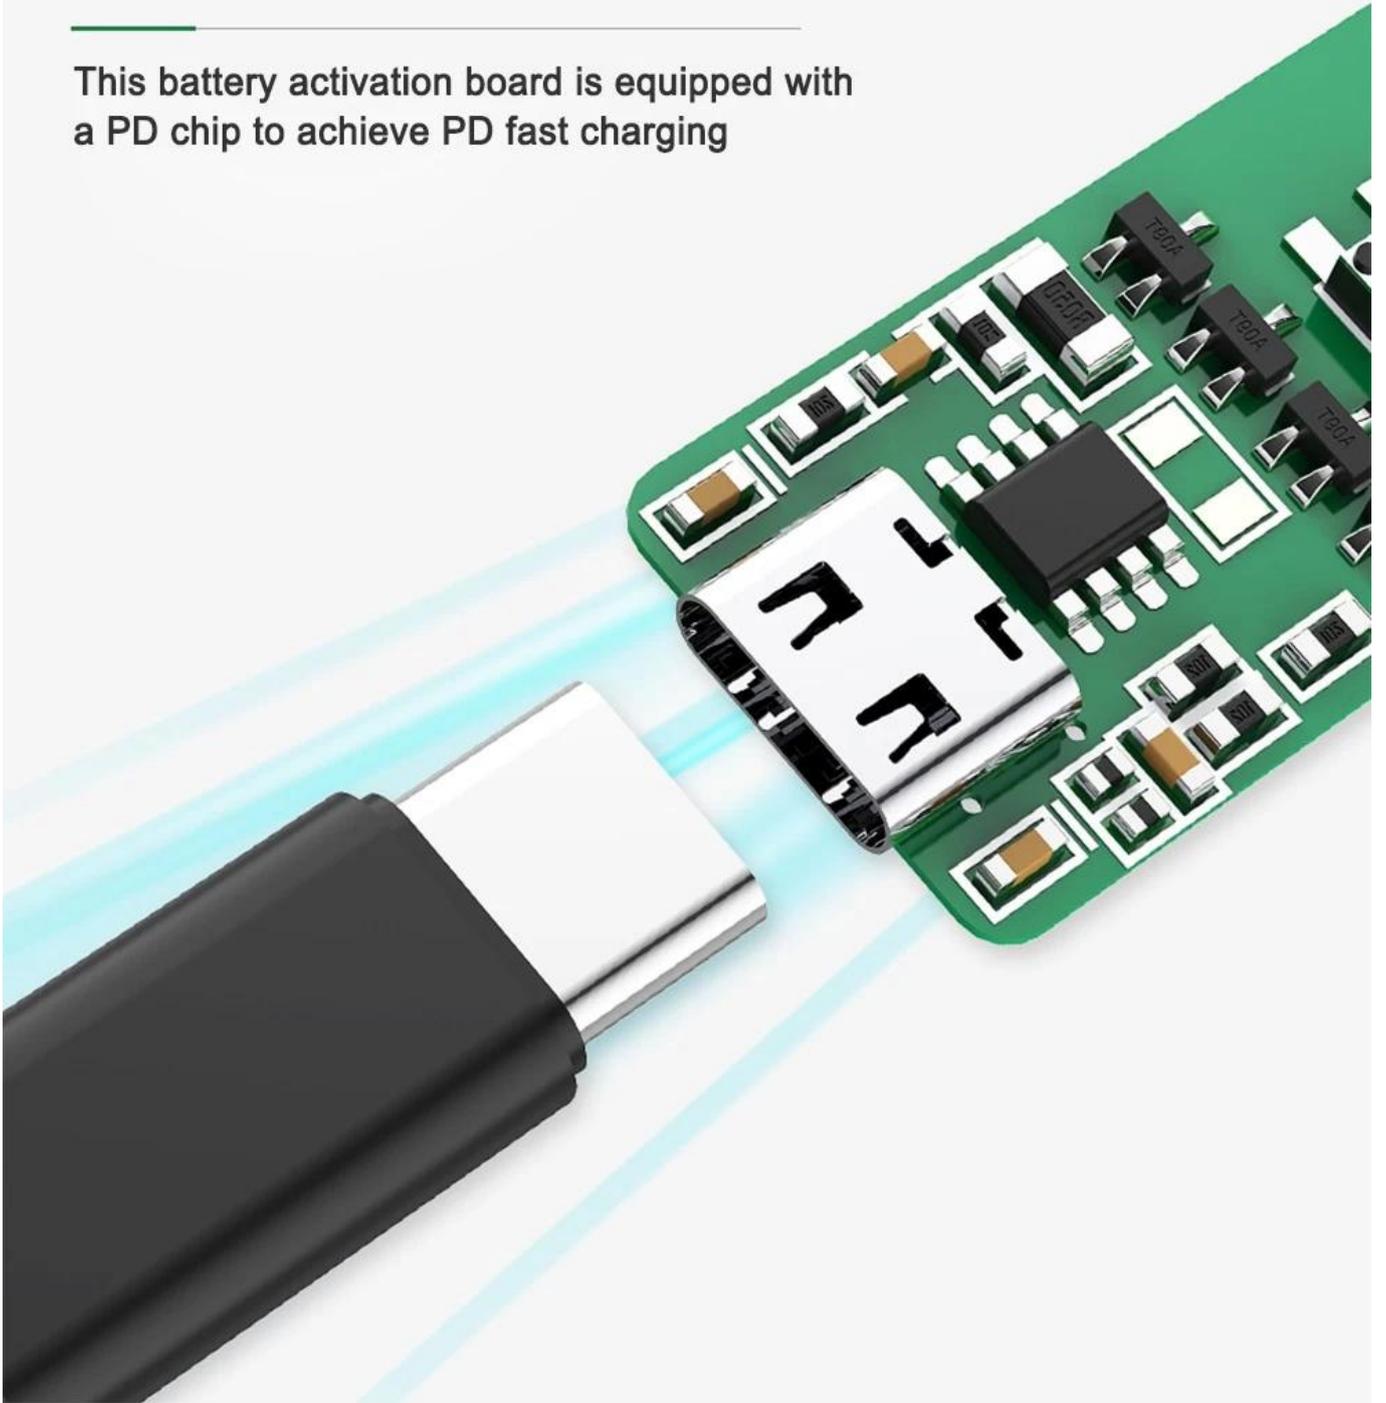

# Compatible Models



Supports 5A input/output charging, the board will automatically cut off power supply when overload voltage is applied

## Suitable for iP5-16


5G/5S/6/6P/7/7P/8/8P/X/XS/  
XS MAX/XR/11/11PRO/11 PRO MAX/  
12/12MINI/12 PRO/12 PRO MAX/13/  
13MINI/13 PRO/13 PRO MAX/14/  
14PLUS/14 PRO/14 PRO MAX/15/  
15PLUS/15 PRO/15 PRO MAX/  
16/16PLUS/16PRO/16 PRO MAX




# Automatic recognition Battery anode/cathode



Built in automatic recognition circuit, the board can intelligently adjust the output voltage and current when the battery is positively or negatively connected to the interface, ensuring safety and accuracy during charging

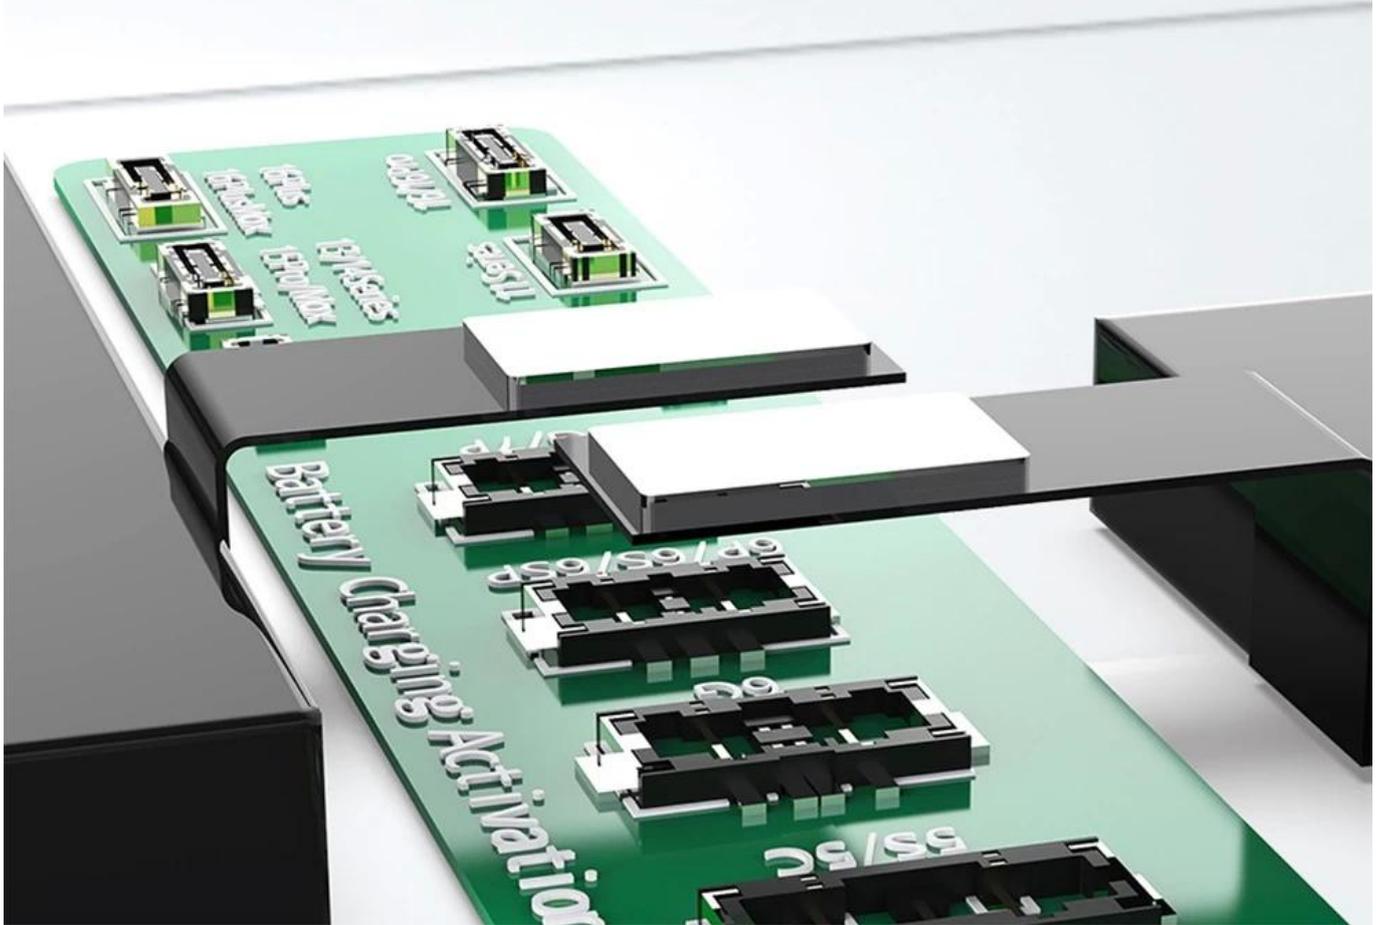

# Parameter

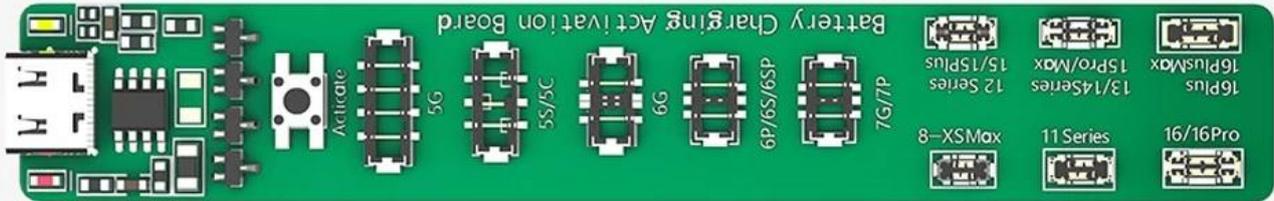

**Name:** Battery Charging Activation Board

**Model:** BST-J4

**Voltage:** 4.2V~4.5V

**Power interface:** Type-C

**Board Size:** 17\*1.5\*105mm **Package Size:** 35\*20\*115mm

**N. W. :** 6.0g

**G. W. :** 12.5g

# Package Size

