

Nome: extrator de fumaça
Modelo: BST-496
Tensão: AC100 ~ 240V
Poder: 30w
Taxa de fluxo: 138m³/h
Quantidade de camadas de filtro: 2
Interface de entrada de ar: φ55mm
Comprimento do tubo: 0,5m
Efeitos de filtro: 0,3um □ 97%
Ruído □ □ 42dB
Tamanho □ 75*175*127mm
G.W.: 2,5 kg
Tamanho do pacote: 250*230*235mm

INDUSTRIAL SPECIFIC SMOKE AND DUST FILTER

Suitable for manual soldering,
Various working conditions such as maintenance stations.



WIDELY APPLICABLE

SUITABLE FOR MULTIPLE SCENARIOS



Effectively address exhaust gases in different homework situations
Various solutions for smoke, dust, and odor



SOLDER DUST PURIFIER



SOLDER DUST PURIFIER



AUTOMATION EQUIPMENT



ONE TO MULTIPLE WORKSTATIONS

The hood and body are sealed with sealing strips,
No smoke leakage, smoke running, low frequency operation

Low noise



**SMALL SIZE
DOES NOT TAKE UP DESKTOP SPACE**
Protect respiratory health



Using imported coconut
shell activated carbon
Rapid adsorption
The filtering effect is as
high as


99.97%

GOOD TOOL FOR SMOKE PURIFICATION

Ensure your healthy breathing





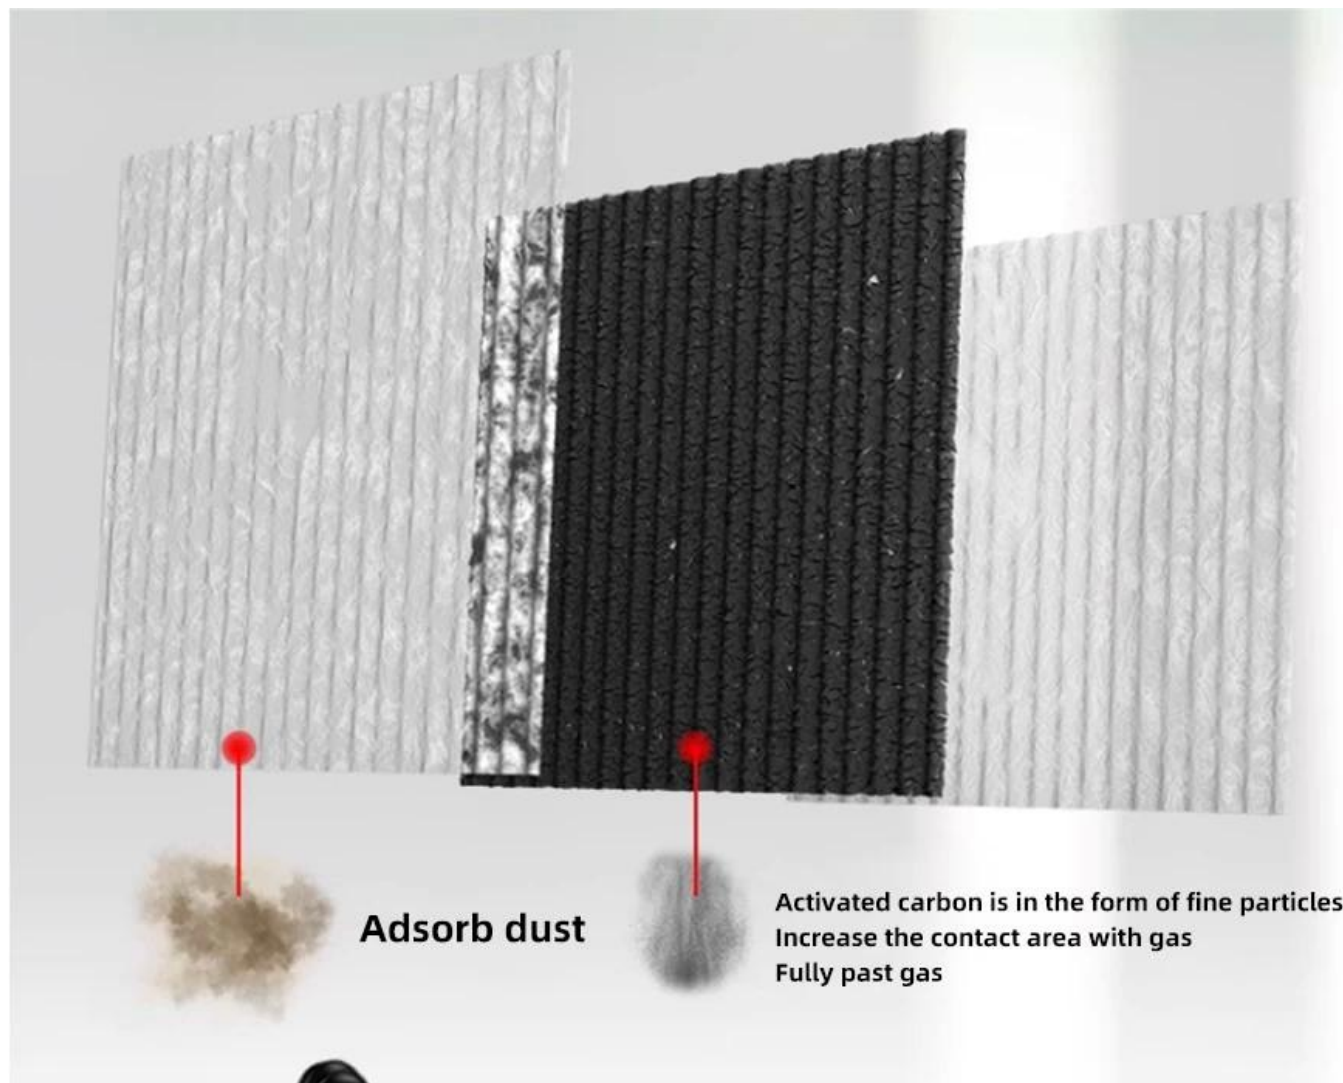

PRODUCT DETAILS



Model
BST-496

Voltage
AC100~240V

Power
30W

Flow rate
138m³/h

Number of filter layers
2-LAYER FILTRATION

Air inlet interface
Φ55MM

Pipe length
0.5M

Filter effects
0.3μm, 97.0%

Noise
<42dB

Size
175*175*127MM

G.W.
2.56KG

Package size
250*230*235

PACKING LIST



host*1



Primary filter cotton*1



Composite filter cotton*1



PIPE*1



Smoking hood*1



Power cord * 1