



|   |  |
|---|--|
| 1 | Новый противоударный рукав, обтекаемый дизайн, удобный на ощупь                          |
| 2 | Большой экран, четкий шрифт  |
| 3 | Металлическая экранирующая пластина, антимагнитная, противоинтерференционная способность |
| 4 | Полная защита, анти-высоковольтная схема зажигания                                       |

| Fuction                                  | Range  | Accuracy    |
|--|--|-------------|
| DC voltage                               | 4V/40V/400V/500V   | ± (0.5%+3)  |
| AC voltage                               | 4V/40V/400V/500V   | ± (1.0%+3)  |
| DC                                       | 999.9mA/9.999A   | ± (2.0%+4)  |
| AC                                       | 999.9mA/9.999A   | ± (1.0%+3)  |
| Resistance                               | 4Ω   | ± (1.5%+3)  |
|  | 40Ω/400Ω   | ± (0.5%+3)  |
|  | 4Ω/40Ω   | ± (1.5%+3)  |
| Capacitance                              | 20nF/200nF   | ± (10%+40)  |
|  | 2uF/20uF/200uF   | ± (2.5%+20) |
|  | 2000uF   | ± (5%+10)   |
| On and off                               |  |             |
| NCV detection                            |  |             |
| Frequency response in AC mode: 40Hz~1khz |  |             |

|                     |                                  |
|---------------------|----------------------------------|
| Product number      | BST-58F                          |
| LCD                 | 4000word                         |
| Range               | automatic                        |
| Material            | ABS-PCV                          |
| Sampling rate       | 3 times / sec                    |
| True RMS            | ✓                                |
| Data retention      | ✓                                |
| Screen backlight    | ✓                                |
| Flashlight lighting | ✓                                |
| Low battery prompt  | ✓                                |
| Automatic shut-down | ✓                                |
| parameter           |                                  |
| product weight      | 133g                             |
| Product Size        | 126*61*28mm                      |
| power supply        | 1.5V AAA battery*2               |
| working environment | Remperature0~40°C Humidity<75%   |
| Storage environment | Remperature-20~60°C Humidity<80% |

# AUTOMATIC —INTELLIGENT MULTIMETER—







### ▼ CHARACTERISTICS

This product is used for maintenance testing of various electronic products. It has metal shielding plate, anti-magnetic and anti-interference performance; full protection function, anti-high voltage ignition circuit design, automatic gear position recognition and more convenient operation.

---

| Fuction                                  | Range  | Accuracy    |
|--|--|-------------|
| DC voltage                               | 4V/40V/400V/500V   | ± (0.5%+3)  |
| AC voltage                               | 4V/40V/400V/500V   | ± (1.0%+3)  |
| DC                                       | 999.9mA/9.999A   | ± (2.0%+4)  |
| AC                                       | 999.9mA/9.999A   | ± (1.0%+3)  |
| Resistance                               | 4Ω   | ± (1.5%+3)  |
|  | 40Ω/400Ω   | ± (0.5%+3)  |
|  | 4Ω/40Ω   | ± (1.5%+3)  |
| Capacitance                              | 20nF/200nF   | ± (10%+40)  |
|  | 2uF/20uF/200uF   | ± (2.5%+20) |
|  | 2000uF   | ± (5%+10)   |
| On and off                               |  |             |
| NCV detection                            |  |             |
| Frequency response in AC mode: 40Hz~1khz |  |             |


|                     |                                  |
|---------------------|----------------------------------|
| Product number      | BST-58F                          |
| LCD                 | 4000word                         |
| Range               | automatic                        |
| Material            | ABS-PCV                          |
| Sampling rate       | 3 times / sec                    |
| True RMS            | ✓                                |
| Data retention      | ✓                                |
| Screen backlight    | ✓                                |
| Flashlight lighting | ✓                                |
| Low battery prompt  | ✓                                |
| Automatic shut-down | ✓                                |
| parameter           |                                  |
| product weight      | 133g                             |
| Product Size        | 126*61*28mm                      |
| power supply        | 1.5V AAA battery*2               |
| working environment | Remperature0~40°C Humidity<75%   |
| Storage environment | Remperature-20~60°C Humidity<80% |

## PRODUCT INFORMATION



1KH true RMS  
NCV induced voltage  
AC and DC current  
AC and DC voltage  
Zero fire line identification  
Resistance on and off

Specifically for the following problems

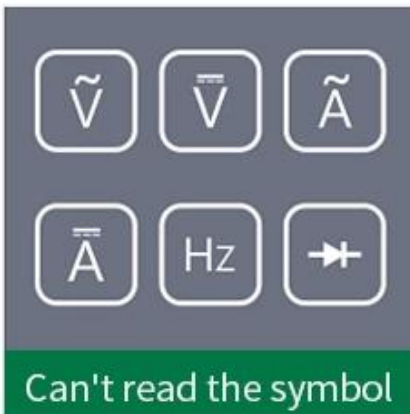

## Automatic identification within 3 seconds



1: Long press the yellow button to start the device



2: Automatic measurement of gear position



SCREEN BACKLIGHT  
EASY TO READ



## NCV Non-contact Test


Long press NCV to enter induction mode NCV sensing area

NCV sensing area



# PRODUCT SIZE



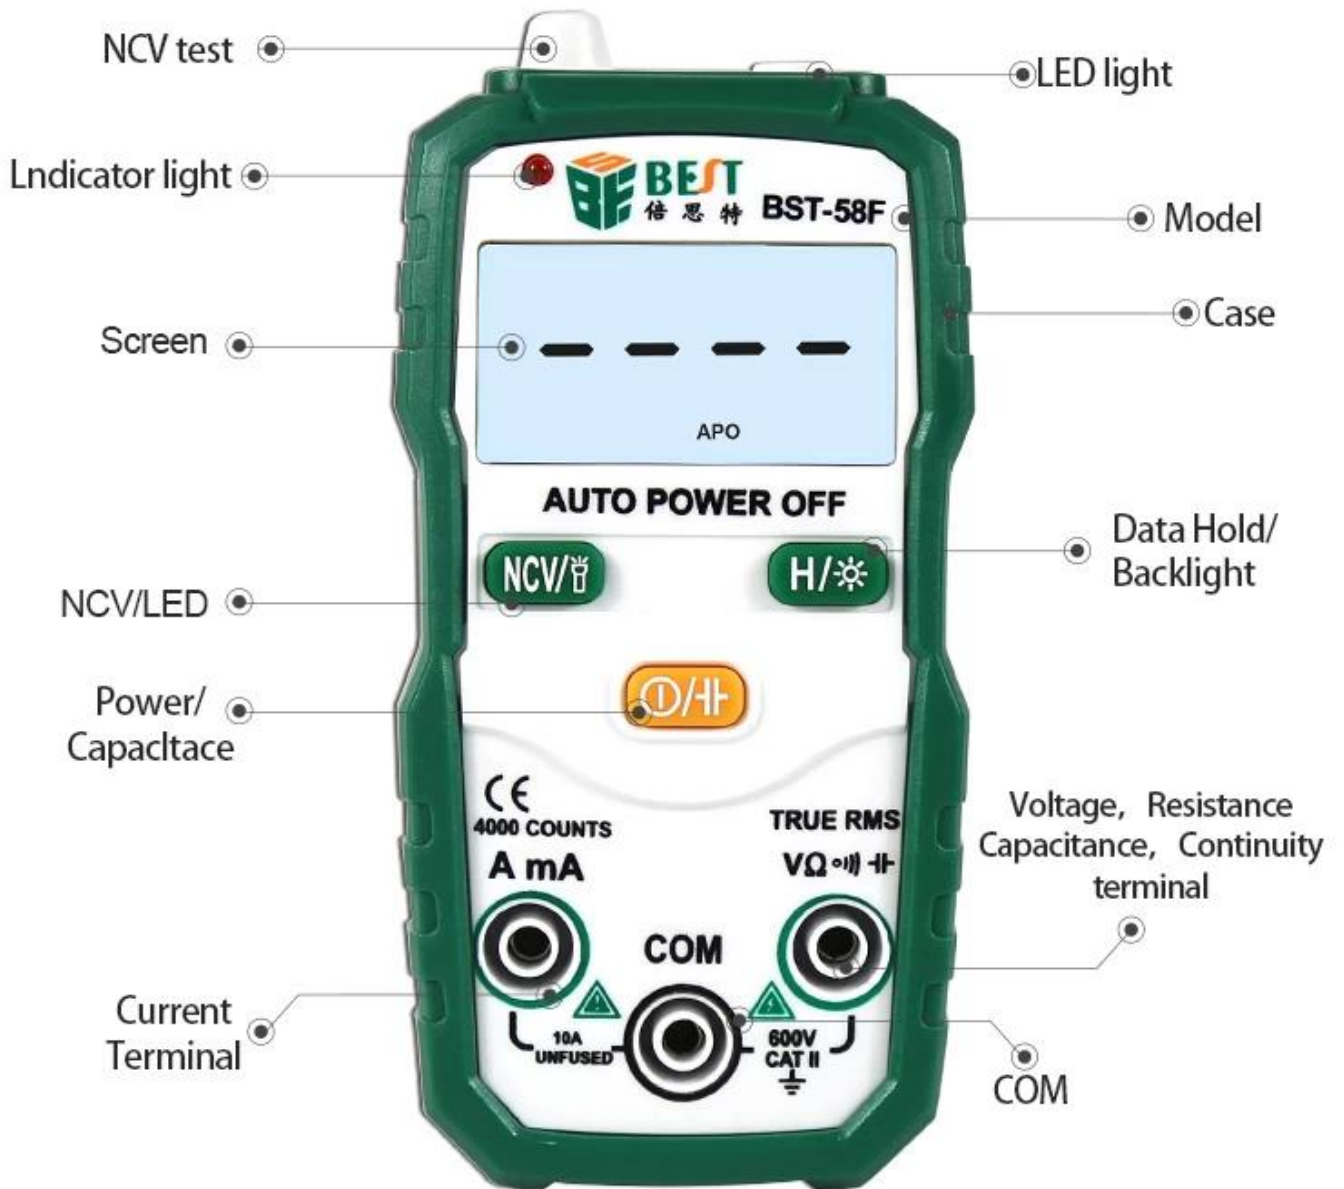

PRODUCT SIZE

# On-off test



# AC voltage test



# DC voltage test



# Capacitance test



# Diode test



# Resistance test

