

Спецификация

Материал: Высококачественная легированная сталь (60CR-V)

Обработать: Используя повторную ковку, поверхность полируется после шлифовки и обработки с помощью машины для измельчения

Твердость: По всей твердости HRC 38 ~ 42

Твердость лезвия HRC56 ~ 62

Емкость сдвига: HRC20 ниже


Жесткая проволока: диаметр 1,5 мм

Мягкая медная проволока, диаметр алюминиевой проволоки 0,1 ~ 2,0 мм

PRODUCT DISPLAY



PRODUCT SIZE

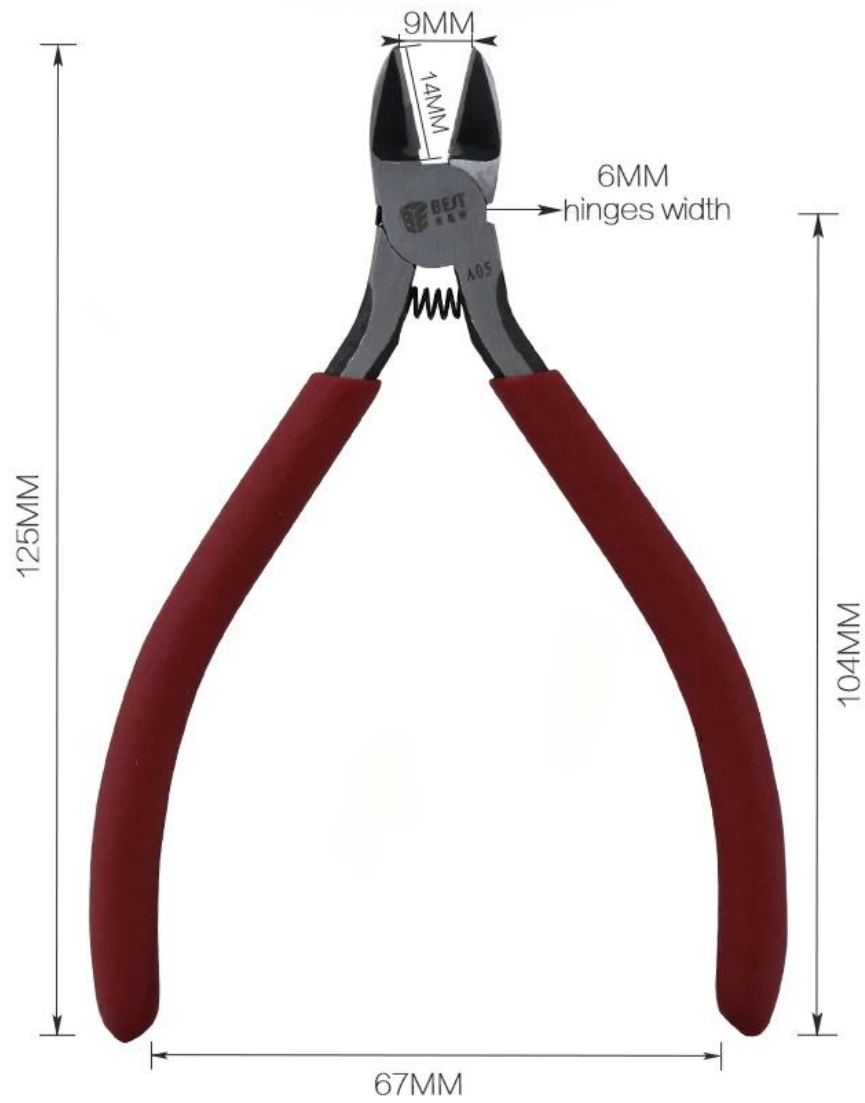


PRODUCT DETAILS



Front



Back side

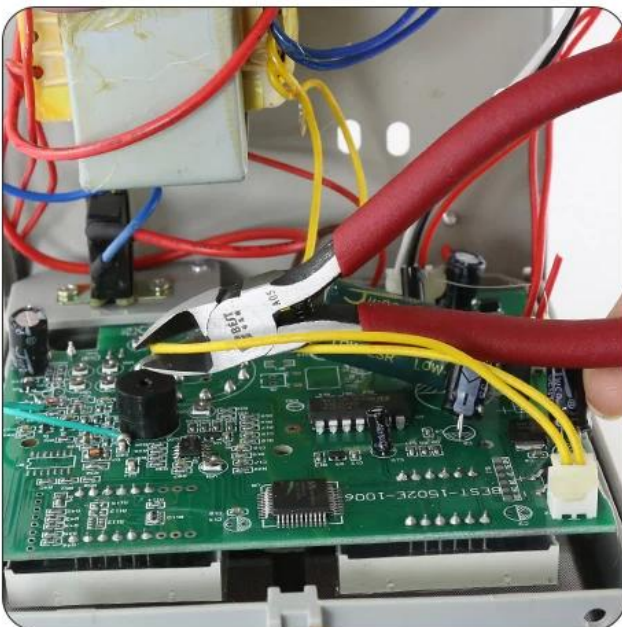

User manual



Warning


This model is not insulated tools. Please use it when power off.



Attention

- To protect user safe, please use protective glasses.
- As the cut material will fly out, make sure no one beside you and no easy damaged things beside you, then begin working.
- This product is not a dedicated pressure equipment.
- When stored, please assure the blade at the closed state and can not be touched by children.
- Do not let the plier tip rub something.
- Please do not directly touch the blade part with hand.
- Do not use in cutting hard materials and steel wire, etc.
- Do not use the pliers above its cutting capability and coarse wire.

PRODUCT PHOTOGRAPH

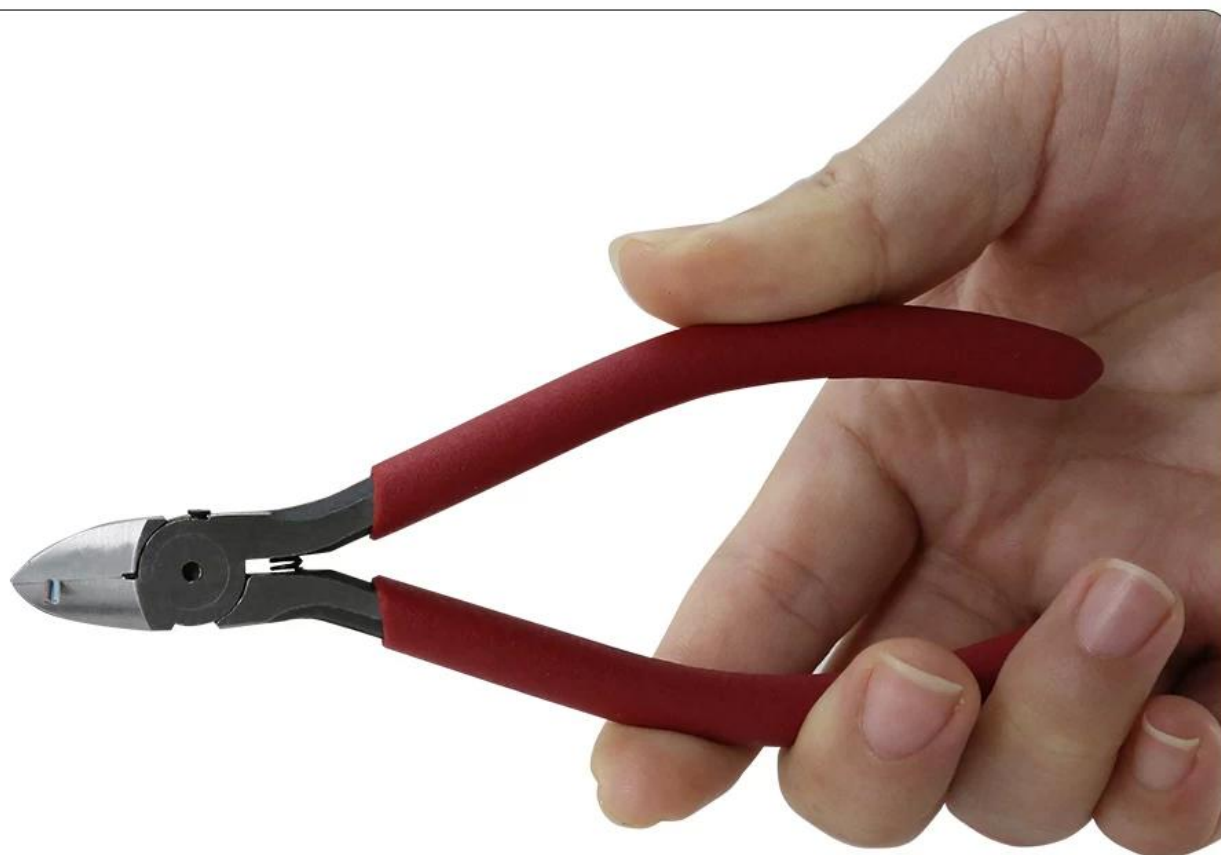

PRODUCT PACKAGING

WEIGHT:87G



179MM

FRONT



75MM

BACK