

ры:

- 2 в 1 цифровой дисплей бессвинцовая паяльная станция горячий воздух
- Контроль температуры 100 ° c-480 ° c
- Бесщеточный вентилятор и мягкий воздушный поток
- Заводская цена
- Примите небольшой заказ и заказ OEM

Использование:

1. Подходит для распайки нескольких компонентов, таких как SOIC, CHIP, QFP, PLCC и BGA и т. Д.
2. Applicable для усадки, нагрева, depainting, оттаивания, preheating и резиновой пайки etc.

Спецификация:

Модель 878D

Номинальное напряжение AC110V / 220V 50Hz / 60Hz

Потребляемая мощность 700 Вт / 40 Вт

Воздушный тип Бесщеточный вентилятор / мягкий воздушный поток

Диапазон температур 100 ° c-480 ° c

Расход воздуха 120 л / мин (макс.)

внутренняя упаковка размер (cm) 26 * 16.5 * 15

Кол-во / коробка 8units

G.W / коробка (кг) 22

размер картонной коробки (cm) 58 * 37 * 34

2 in 1 digital display lead-free helical wind hot air soldering station

Appliance Repair



Board soldering



Phone Repair




Heat shrinkable tube



PRODUCT SIZE




PRODUCT DETAILS

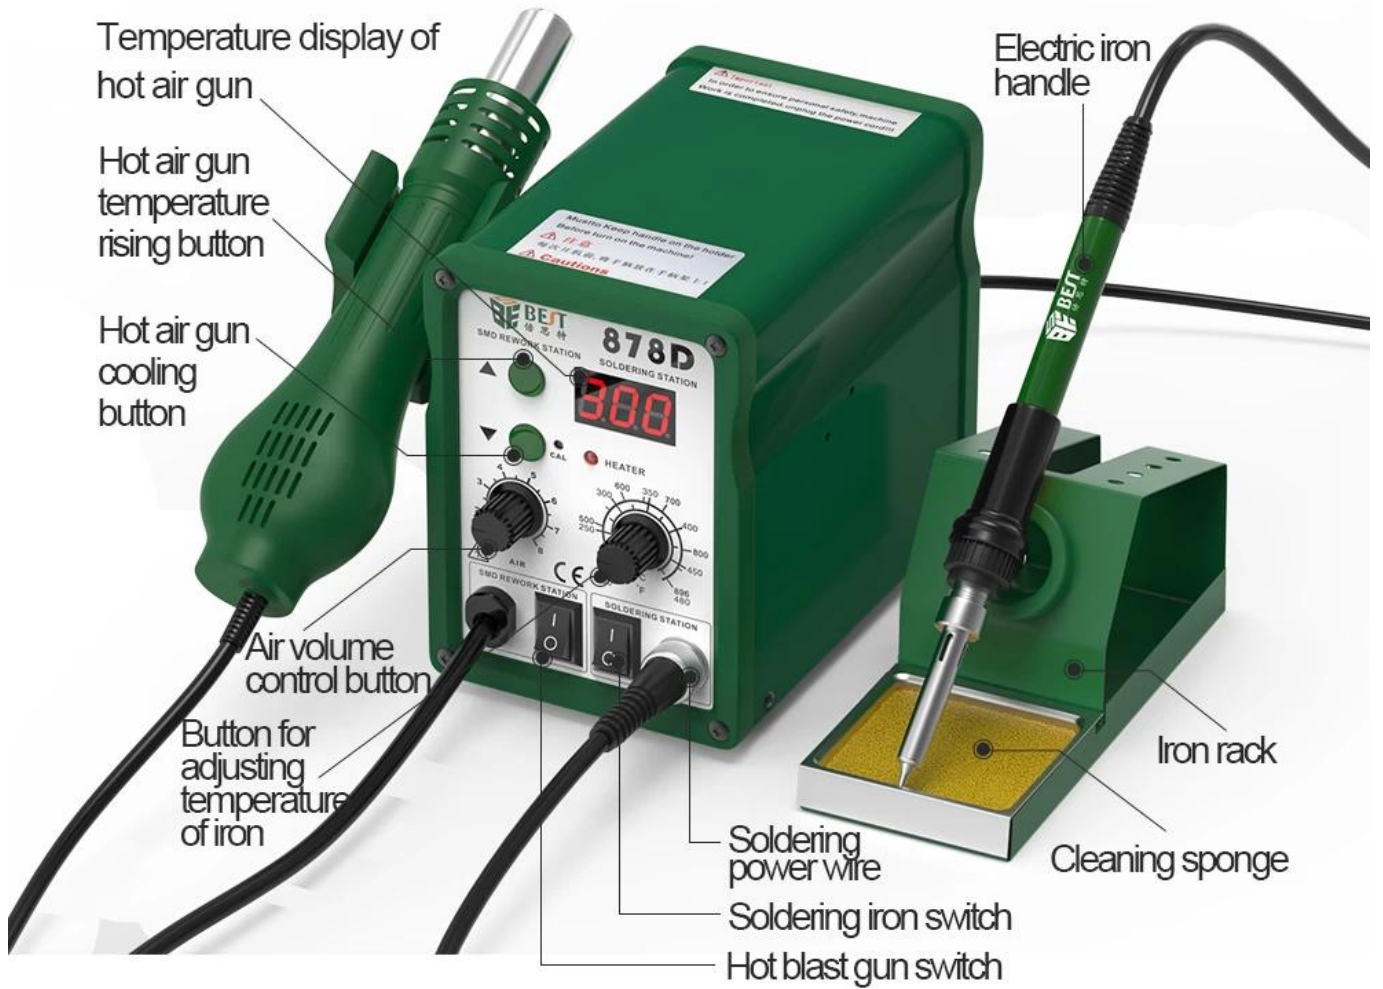



PRODUCT FEATURES




Brand:		Name:	2 in 1 digital heat gun rework station	
Model:	BST-878D	Rated voltage:	AC 110/220V 50/60HZ	
Rated power:	700W/40W	Airflow:	120L/min (Max)	
Air gun temperature range:	100 ° C - 480 ° C			
Soldering iron temperature range:	200 ° C - 480 ° C			
Weight(including packaging):	2.65KG	Size:	Packing:	L265*W170*H145mm
			Machine:	L98*W140*H132mm
Accessories:	878D, wind gun nozzle 5, 8, 10mm, soldering iron frame, power cord, air gun handle, soldering iron handle, wrench, starter			
Features:	1. LED temperature display, temperature is accurate and stable, clearly visible			
	2. When the air gun is placed on the bracket, it will automatically enter the cooling and cooling standby. When the air gun is picked up, it will heat up quickly.			
	3. High power, fast heating, anti-static, temperature adjustable			

Rapid temperature rise
durable Intelligent, put back on the
bracket to automatically cool down



Pure copper transformer

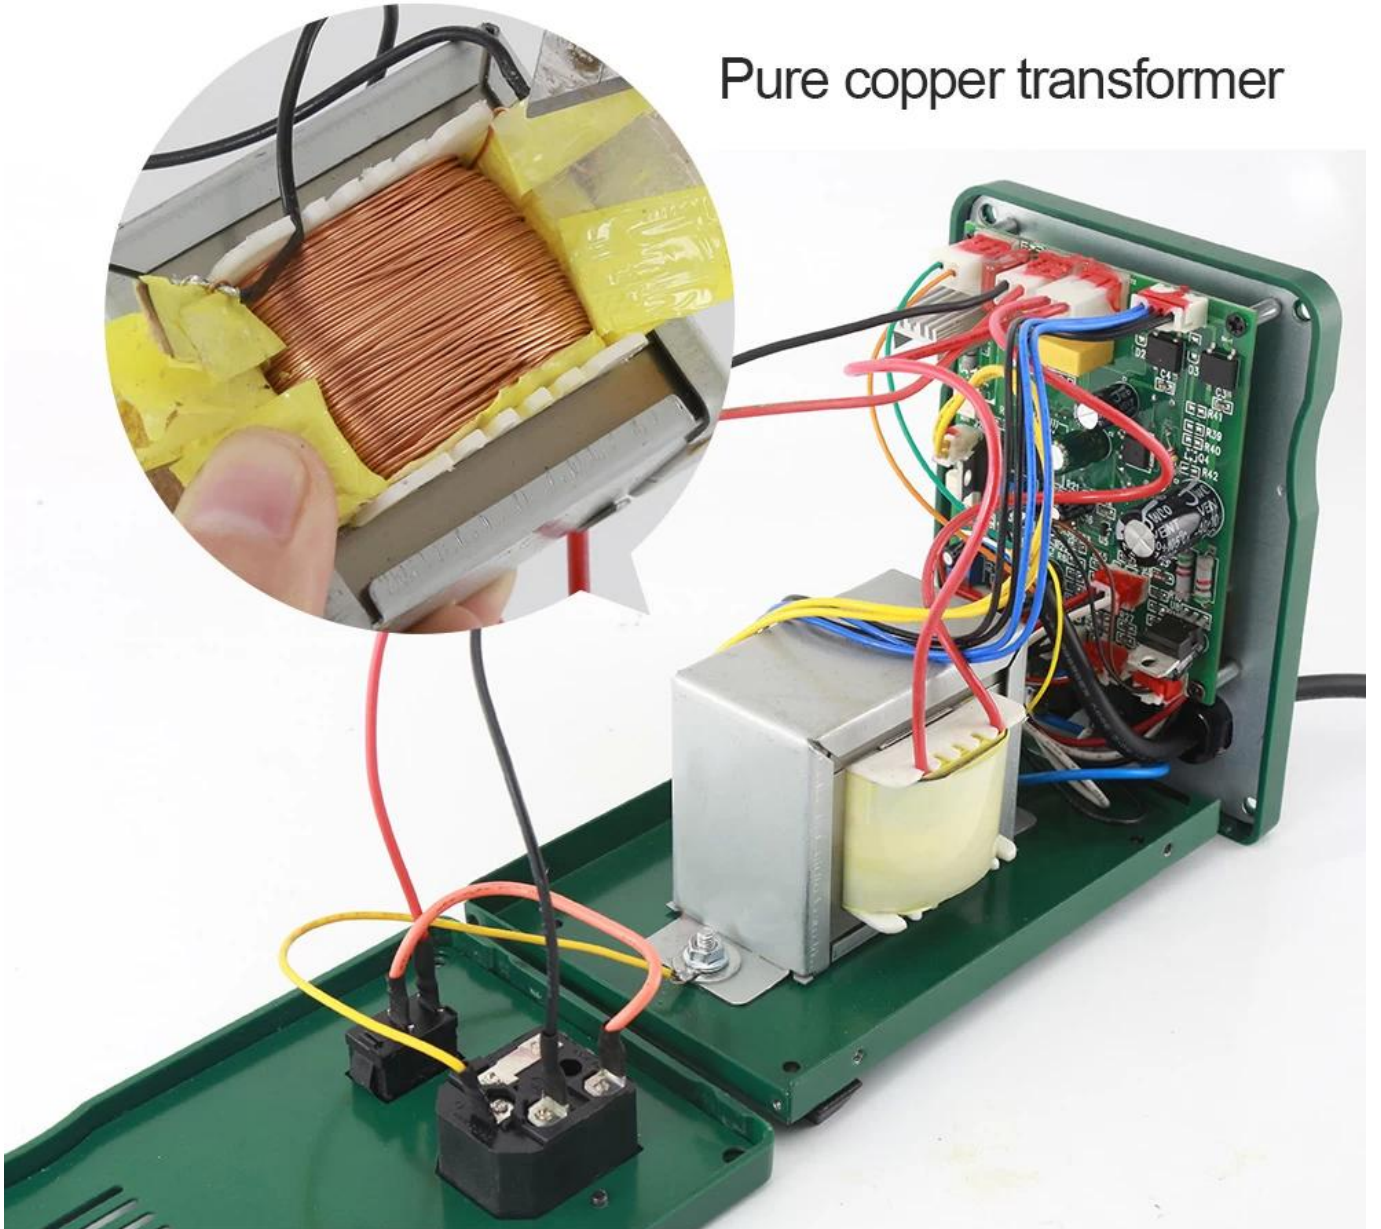

PRODUCT PACKAGING



Package:
265*170*145mm



BST-878D



Power cable



Soldering Iron frame



Soldering Iron

