

Sn60Pb40 Проволока для пайки 1,0 / 0,8 / 0,6 / 0,5 / 0,4 / 0,3 мм 100G

## PRODUCT APPLICATION




Applicable to LED, computer, precision instruments, instruments, microelectronics and other products of welding.

## PRODUCT DISPLAY



## PRODUCT DETAILS

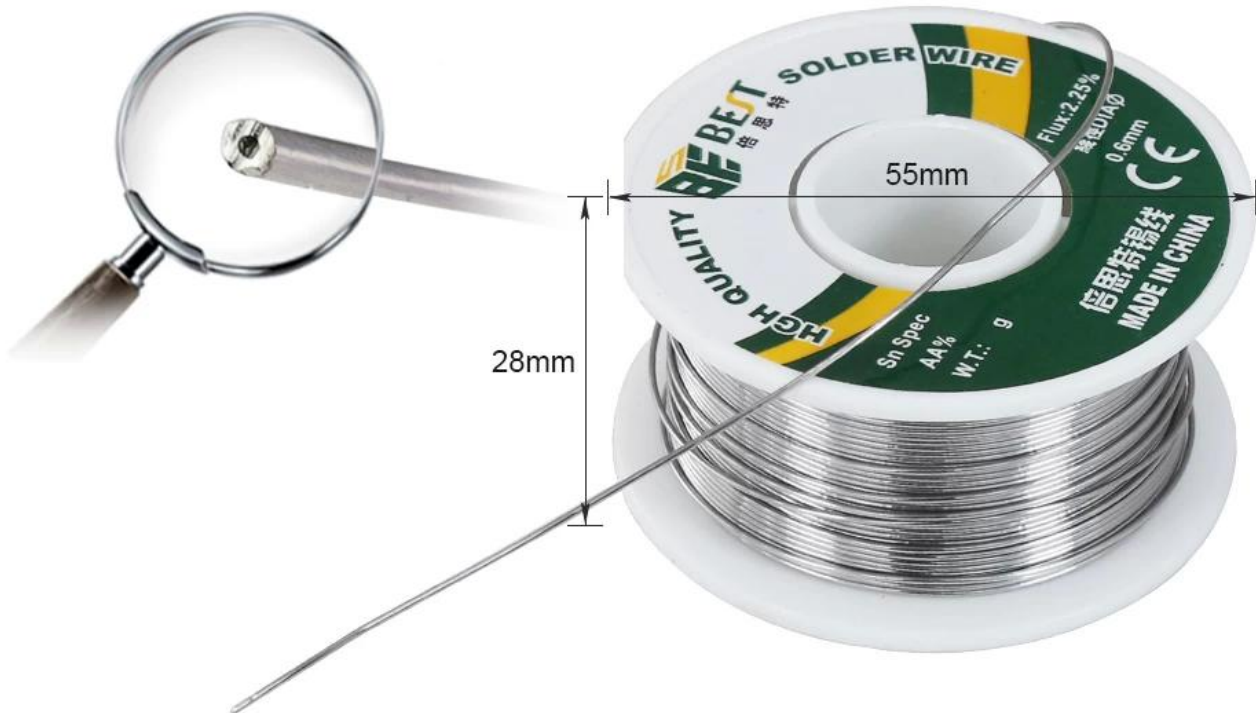



Φ0.3mm

Φ0.4mm

Φ0.5mm

Φ0.6mm

Φ0.8mm

Φ1.0mm

Φ1.2mm



Brand: BEST

Weight: 100g

Operating temperature: 280-320 ° C

Ingredients: Tin 55% Lead 45%

Melting point: 183-190 ° C



# PRODUCT FEATURES



High reliability, no cleaning assembly process, with solder bright and bright, simple and beautiful, less residue after welding, solder surface with anti-oxidation protective film.

# PRODUCT PHOTOGRAPH

