BST - 3515A [illegible] Desoldering 3.5 [illegible]. [illegible] 1.5
[illegible] / [illegible]

[illegible]

1.
[illegible] [illegible]
2. [illegible]
[illegible]
4. [illegible] 1 2 [illegible] 3 [illegible]
[illegible] Sn63
[illegible] 60 ([illegible]) [illegible]

[illegible]:

1. [illegible]
2. [illegible] exceess
[illegible]
[illegible] 3.Therm, [illegible] residu
4. [illegible]

PRODUCT DISPLAY

PRODUCT SIZE

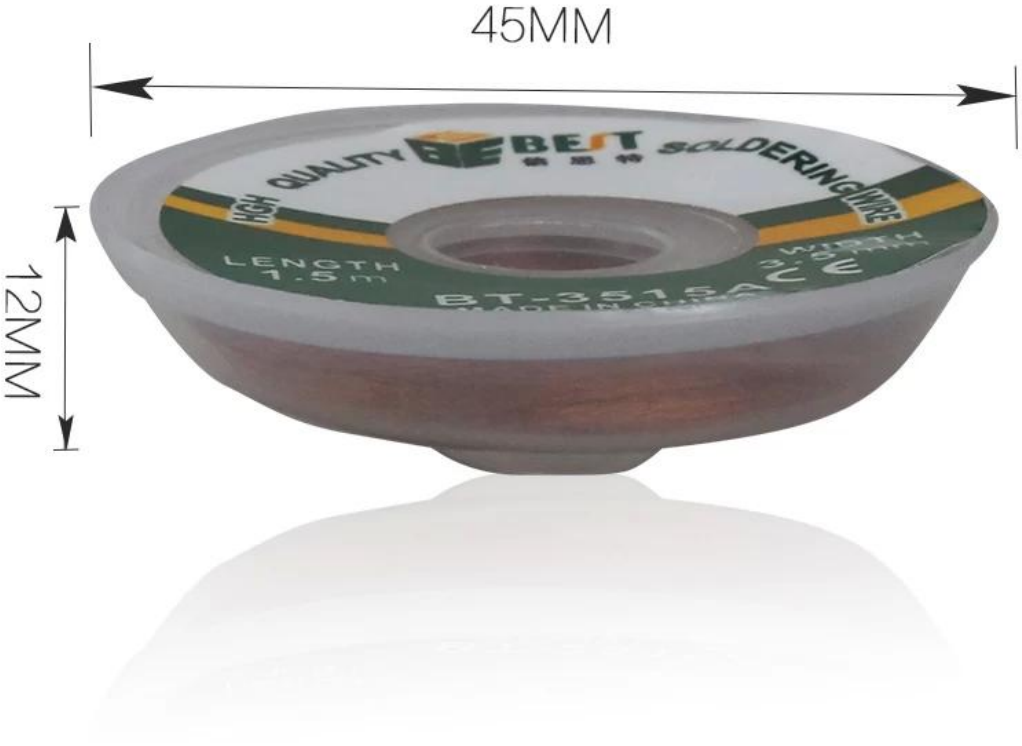

PRODUCT FEATURES

FRONT

BACK

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

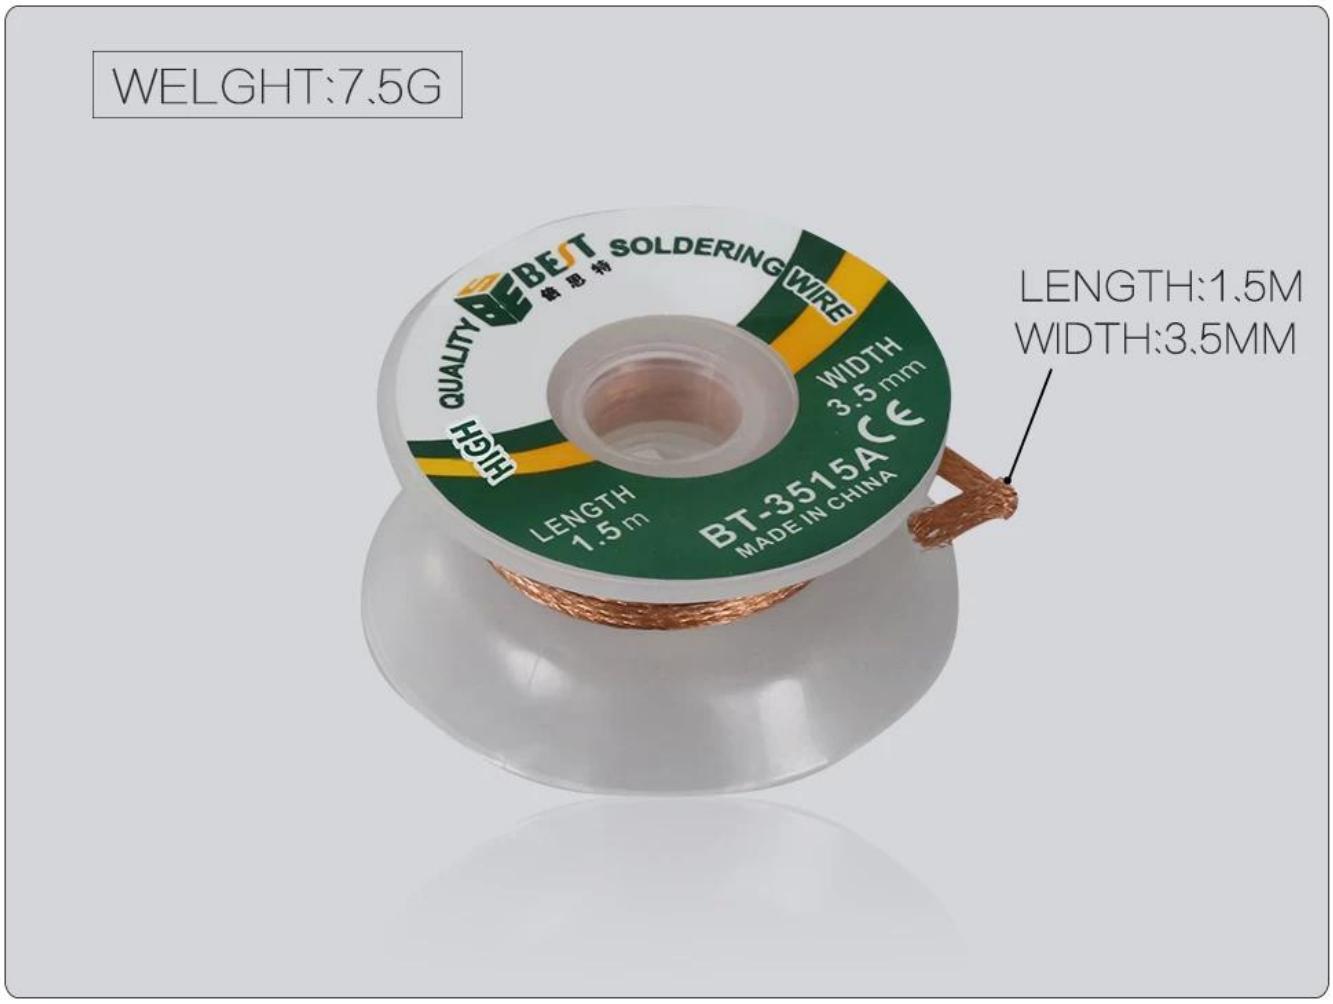

BEST
SOLDERING WIRE
HIGH QUALITY
LENGTH
1.5m
WIDTH
3.5mm
BT-3515A
MADE IN CHINA

HIGH QUALITY BEST SOLDERING WIRE
LENGTH 1.5m
BT-3515A
MADE IN CHINA
HIGH QUALITY BEST SOLDERING WIRE
LENGTH 1.5m
BT-3515A
MADE IN CHINA
HIGH QUALITY BEST SOLDERING WIRE
WIDTH 3.5mm
LENGTH 1.5m
BT-3515A
MADE IN CHINA
HIGH QUALITY BEST SOLDERING WIRE
WIDTH 3.5mm
LENGTH 1.5m
BT-3515A
MADE IN CHINA