

BST-863

：

- 1
- 2 3 : CH1, CH2 CH3
- 3 100 °C
- 4
- 5 Zero-crossing , LCD
- 6
- 7

PRODUCT SIZE

Digital hot air desoldering station

- ✓ High power
- ✓ Automatic sleep
- ✓ Brushless turbine
- ✓ Warming up quickly
- ✓ Accurate and stable




PRODUCT FEATURES



Touch sensitive keys

Sensors closed loop, Zero-crossing triggering microcomputer temperature control, LCD touch screen. Heating up rapidly, the temperature accuracy and stability, without effect of the air flow, and truly achieved lead-free solder.



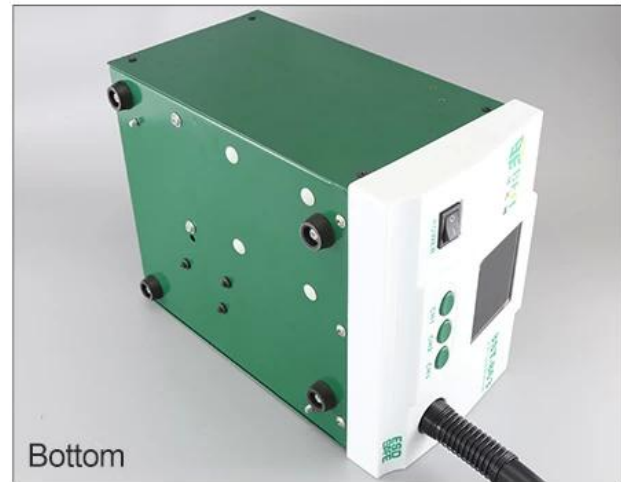

Model :	BST-863	Power :	1200W
Weight :	3.65kg	Display type :	LCD
Input Voltage :	AC 220V/110V 50/60Hz	Noise :	<45dB
Temperature Range :	100°C~550°C	212°F~1022°F	
Temperature Accuracy :	±1°C (Static)		
Air Volume Range :	1~100 level		
Mainframe Size :	188(L)*240(D)*135(H)mm		
Working Environment :	0°C~40°C/32°F~104°F		
Storage Environment :	-20°C~80°C/-4°F~176°F		
Storage Humidity :	35%~45%		

PRODUCT DETAILS



PRODUCT PACKAGING



BST-863



Bracket



Power line



Nozzle tip



Instruction manual



370mm*320mm*225mm

Packing box