

XX

XXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXX 500 ° C
XXXXXXXXXXXXXXXXXXXX Several XXXXXXXXXXXXXXXXXXXXXXX, XXX IC XXXXXXXXXXXXXXXXXXXXXXX
XX (0 ~ 36 XXX.)
XX
XX
XXXXXXXXXXXXXXXXXXXX X XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
(XXXXXXXXXXXXXXXXXXXXXXXXXXXX) XXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXX Several XXXXXXXXXXXXXXXXXXXXXXX, XXX IC XXXXXXXXXXXXXXXXXXXXXXX
XX


PRODUCT DISPLAY

*High temperature resistant magnetic groove work pad*




# Compared


**A-300**

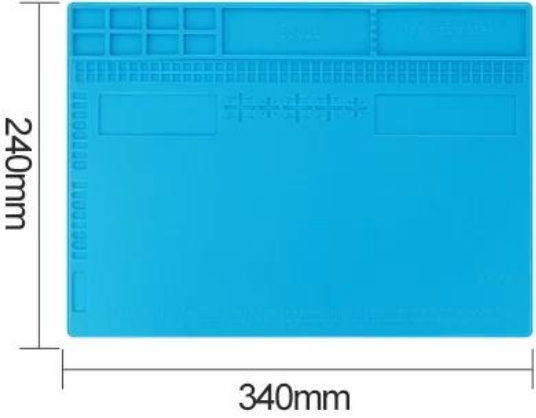


**S-140**

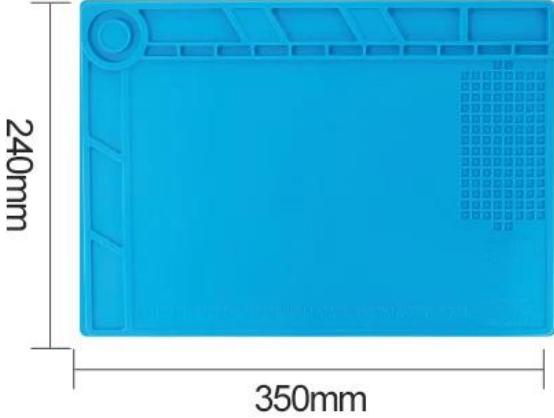


**S-130**

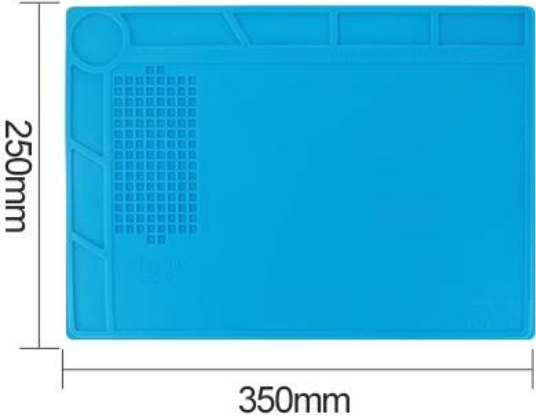

**S-120**

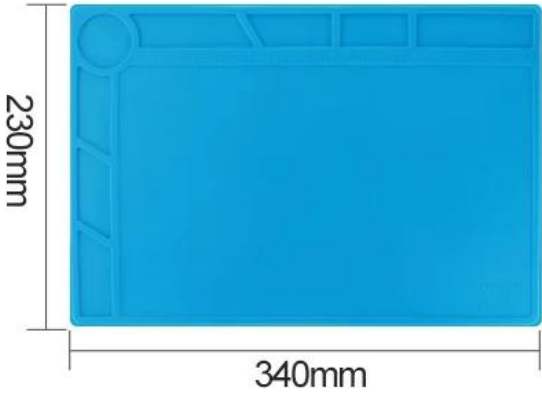

Chip groove, Prevent chip drop loss

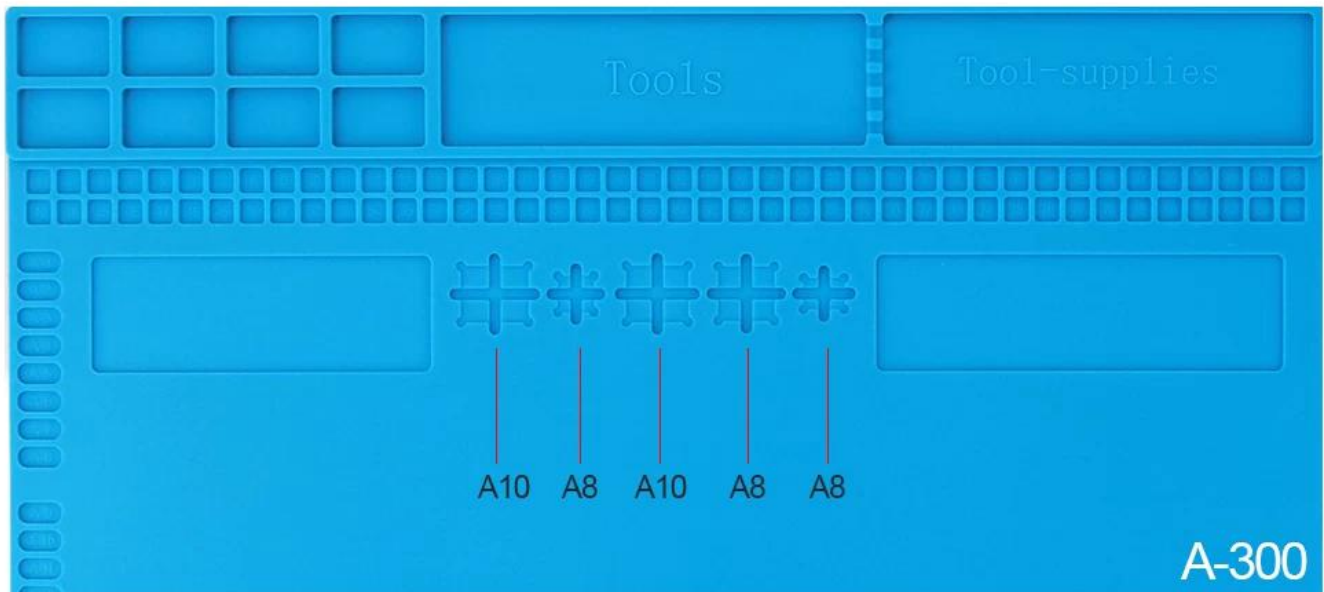


With magnetic, the placement tool is easier and non-slip, avoiding the loss of falling



# Screw positioning area



# Thicken

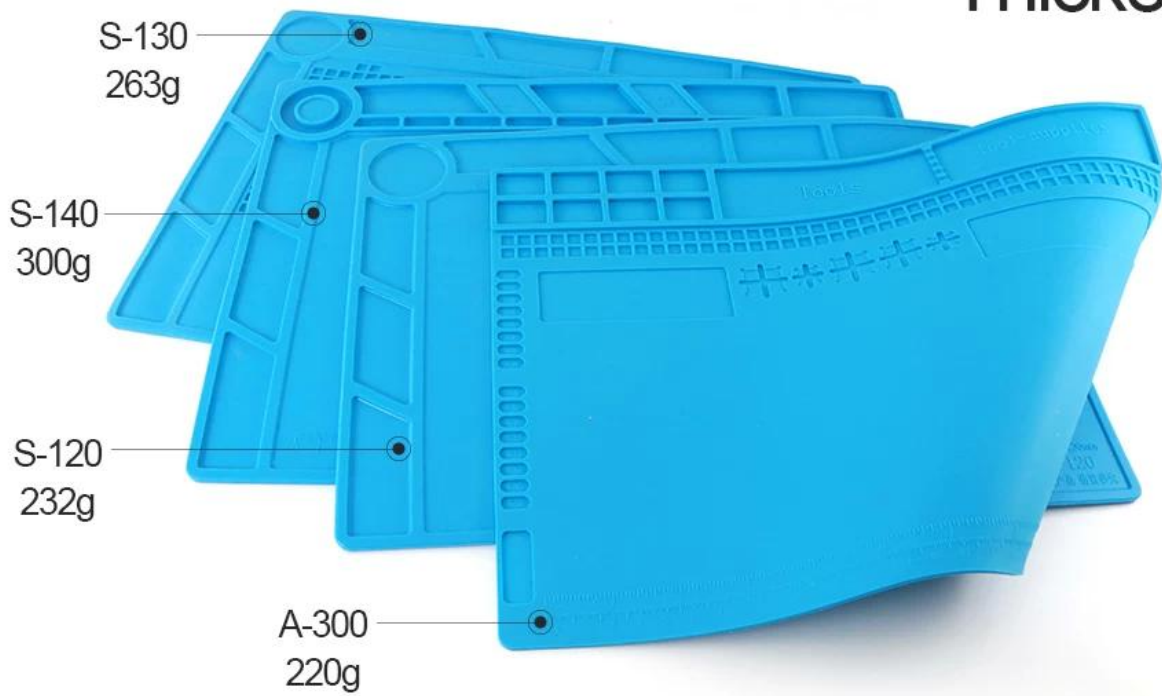

S-140



S-130



S-120



A-300

