

Features

- 1, 零電壓開關, 零電壓開關, 零電壓開關 zero-crossing, LED, 零電壓開關, 零電壓開關, 零電壓開關
- 2, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關
- 3, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關
- 4 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關, 零電壓開關

Specification

型號	858D+	
LED	LED	LED
功率	700W	
電壓 & 電流	120 伏特 (MAX)	
溫度	LED	LED (溫度: 1 ° C)
溫度	100 ° C-450 ° C	
長度 (含手柄)	120	
尺寸	138mm (寬) * 100mm (高) * 150mm (厚)	
重量	1.55KG	
噪音	45dB	

Application

- 1 SOIC, CHIP, QFP, PLCC BGA (LED)
- 2 contrion, depainting, degluing, LED

PRODUCT DISPLAY



PRODUCT SIZE



PRODUCT DETAILS



PRODUCT FEATURES



Front




Behind

Name: Lead screw type hot air gun

Features2: Brushless fan with long lifetime, low noise

Features3: Adjustable airflow, large and soft airflow, easy adjustment of temperature, suitable for multiple usages
Features4: Automatic cooling function of the system will prolong the life of heating element, and protect the hot air gun.

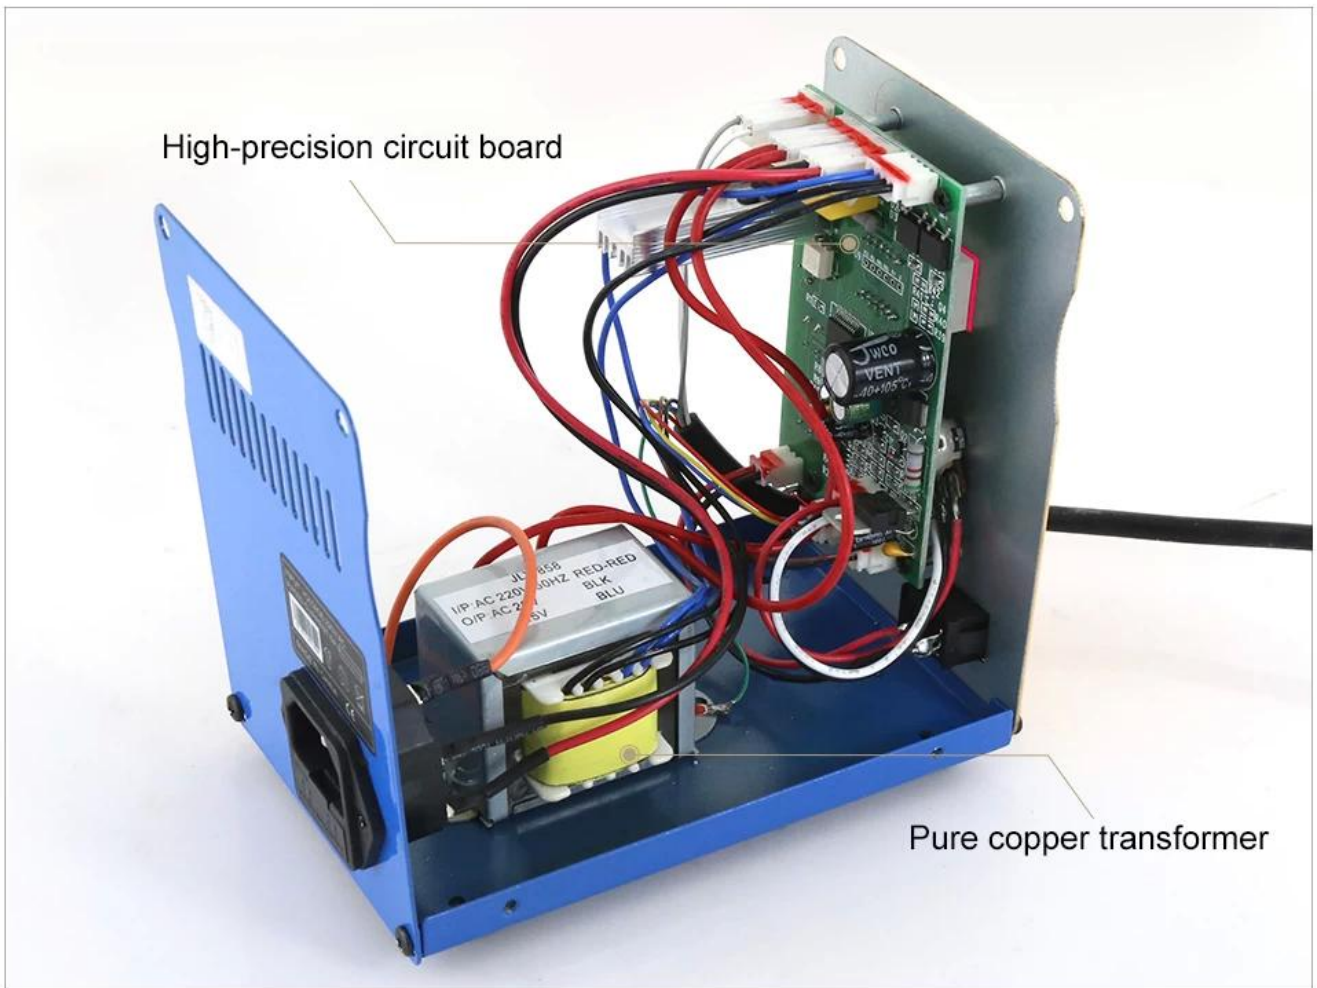


High-precision circuit board

Pure copper transformer

Internal structure

High-quality heating body warming fast
Ni-Cr alloy heating core, fast heating,
high temperature, long life, real material

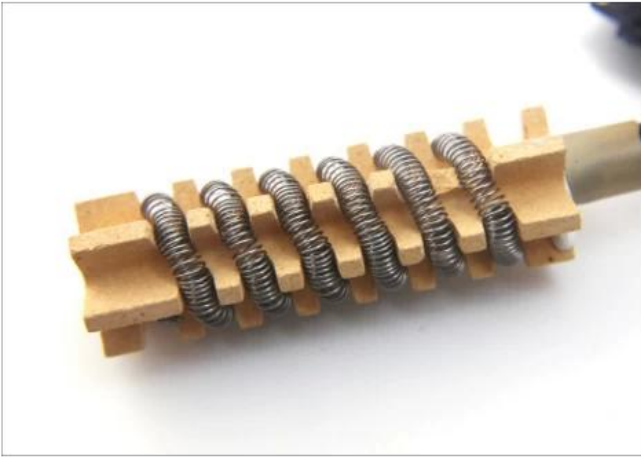

PRODUCT PHOTOGRAPH



PRODUCT PACKAGING

WEIGHT:1.8KG

