

型番: BSH-496

型番: BST-496

動作電圧: AC100 ~ 240V

消費電力: 30W

吐出流量: 138m³/h

吐出圧力: 2

空気入口 Air Inlet: φ55mm

吐出管径 0.5m

吐出圧力 0.3um 97%

吐出圧力 42db

吐出圧力 75*175*127 mm.

G.W.: 2.5 kg.

吐出圧力 250*230*235 mm.

INDUSTRIAL SPECIFIC SMOKE AND DUST FILTER

Suitable for manual soldering,
Various working conditions such as maintenance stations.



WIDELY APPLICABLE SUITABLE FOR MULTIPLE SCENARIOS



Effectively address exhaust gases in different homework situations
Various solutions for smoke, dust, and odor



SOLDER DUST PURIFIER



SOLDER DUST PURIFIER



AUTOMATION EQUIPMENT



ONE TO MULTIPLE WORKSTATIONS

The hood and body are sealed with sealing strips,
No smoke leakage, smoke running, low frequency operation

Low noise



**SMALL SIZE
DOES NOT TAKE UP DESKTOP SPACE**
Protect respiratory health



Using imported coconut
shell activated carbon
Rapid adsorption
The filtering effect is as
high as

99.97%

GOOD TOOL FOR SMOKE PURIFICATION

Ensure your healthy breathing





1

Smoke is inhaled through a smoking hood

2

Through the bamboo pipe

3

Penetrating through primary efficiency filter cotton

Perform purification

4


Through high-efficiency activated carbon filter cartridge

Perform purification

5

Finally, the filtered gas is discharged

The discharged gas meets national standards

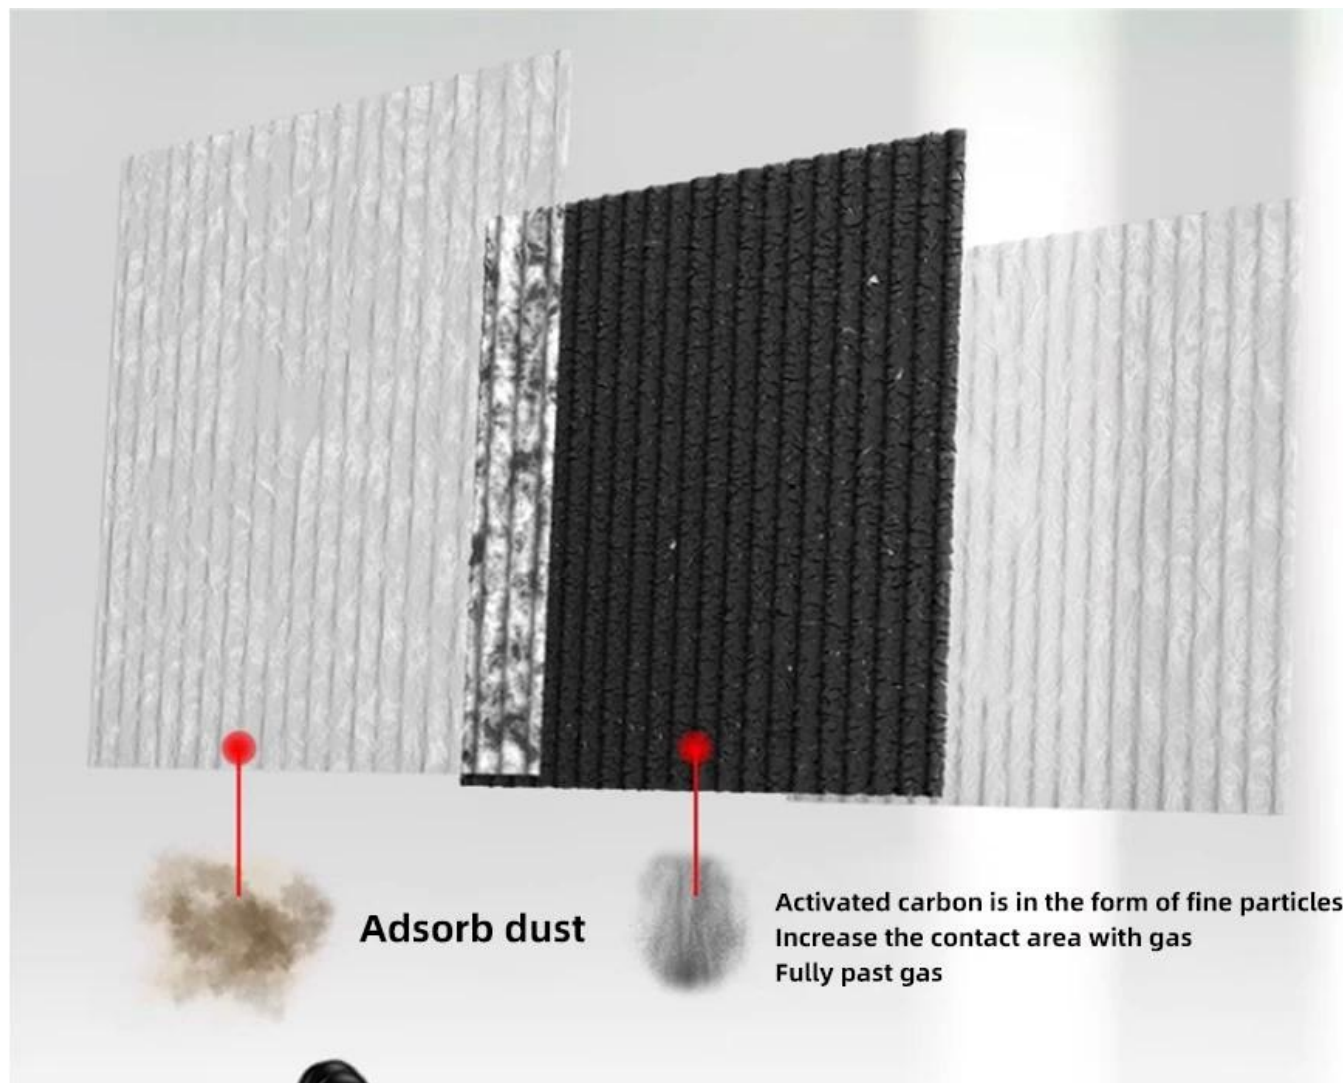

PRODUCT DETAILS



Model
BST-496

Voltage
AC100~240V

Power
30W

Flow rate
138m³/h

Number of filter layers
2-LAYER FILTRATION

Air inlet interface
Φ55MM

Pipe length
0.5M

Filter effects
0.3μm, 97.0%

Noise
<42dB

Size
175*175*127MM

G.W.
2.56KG

Package size
250*230*235

PACKING LIST



host*1



Primary filter cotton*1



Composite filter cotton*1



PIPE*1



Smoking hood*1



Power cord * 1