Features

1. DC電源

- 高精度と優れた安定性を掲げ。
- 電圧と電流の値が連続してゼロから定格値に調整可能です。
- 一定の電圧と電流が自動変換されています。怒り内の任意の点を限度と保全スポットを決定する際に行われます。
- 電圧と電流を同時にデジタルLEDに表示されています。

2. DC電源超電流DC電源を提供します

3. DC電源は完璧な保護回路を有しています。

Application

DC電源は、広くそのようなECT機関研究所、自動試験装置、電子試験装置、工場の生産ラインなどの様々な環境で使用されます。

Specification

技術仕様	
定格動作条件	
入力電源電圧:	10%の50Hzの±220V
定格出力電圧:	0~15V
定格出力電流:	最大1A
定格出力電力:	15W
メーター表示解像度:	2.5%
リップルおよびノイズ:	≤1mVRMS
関数:	機能、遮断保護を復元

レギュレータの作業状況	
出力電圧:	0~15Vの間で連続的に調整
パワー安定性:	≤0.01%+ 5mVの
負荷安定性:	≤0.01%+2mVの
回復時間:	≤100US (最大電流≤の3A)
作業状態の定常流	
出力電流:	0~1Aとの間に連続的に調整
パワー安定性:	≤0.2%+ 5ミリアンペア
負荷安定性:	≤0.2%+ 10ミリアンペア

梱包仕様	
体重:	1.3kg
ボックスサイズ:	17.4 * 9 * 15 CM
梱包サイズ:	76 * 28.5 * 46センチメートル
パッキング:	20 セット
カートン重量:	28キロ
フィッティング:	Mユーザ･マニュアル

製品のショー:

Features

BEST 倍思特

Product Name：DC power supply

Product Type：BST-1501A

Body weight： 1. 3kg

Dimensions：106*141*150mm

Widely used in factory production lines, schools, maintenance, commissioning, laboratories and other places

Features introduced

1.Voltage :0-15V Current 0-1A；

2.Total power foot, high stability and reliable quality；

3.With short circuit protection, automatic recovery function;

Size

Length:141mm
Width： 106mm
Height:150mm
YOYICHN
CLASS2.5
BEST
PS-1501A
AUTOMAT
DC
OWER SUPPLY
短路保护
自动恢复
VOLTAGE
POWER
0-15V

Products

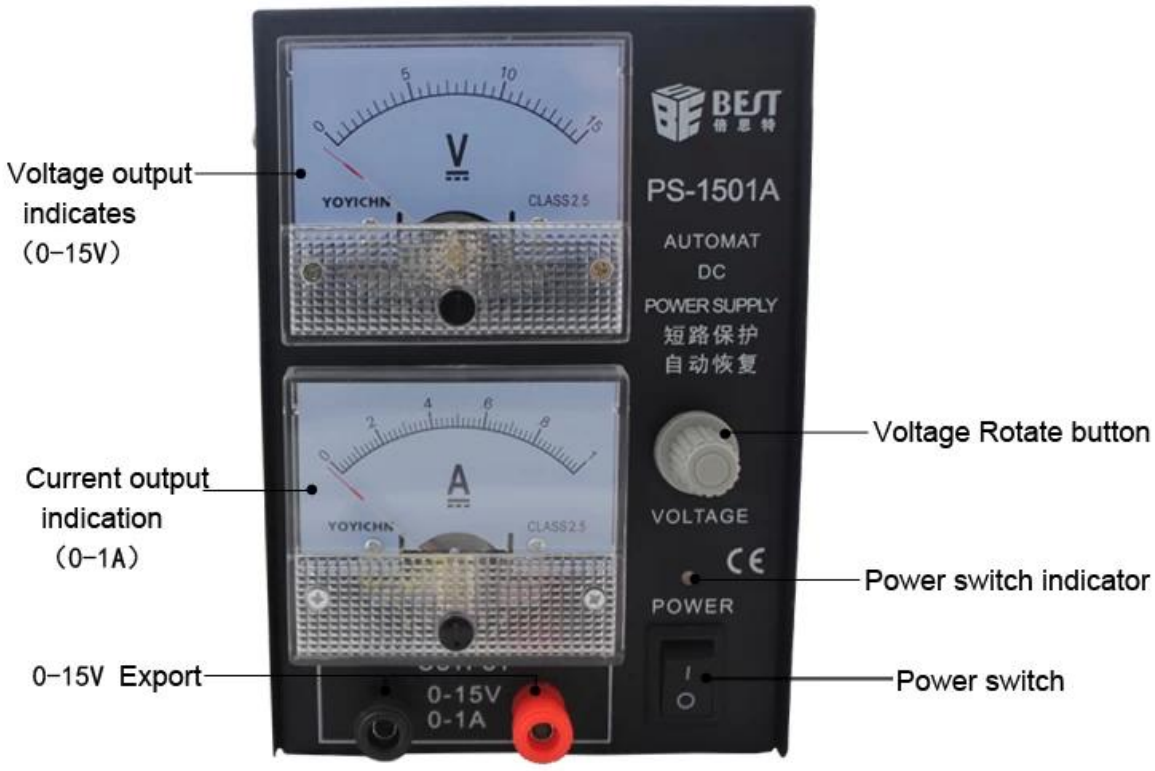
Voltage output indicates (0-15V)
Current output indication (0-1A)
0-15V Export
Voltage Rotate button
Power switch indicator
Power switch
BEST
倍思特
PS-1501A
AUTOMAT
DC
POWER SUPPLY
短路保护
自动恢复
VOLTAGE
POWER
0-15V
0-1A

Fuse
Power Cord
FUSE

Picture

Positive

Side

Back

Package

Detail

Voltage display

Voltage display accuracy: 2 small cell

Current Display

Current display accuracy: 2 small cell

0-15V output

Power key

After power on, press the switch is turned on to work, close to stop working

Voltage output / input mode conversion

Fused

Equipped with a fuse on the rear panel, the effective protection of the instrument, use more confidence