Features

1. DC□□

- □□□□□□□□□□□□□□□
- □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
- □□□
- □□□□□□□□□□□□□□LED□□□□□□□□□□

2. DC□□□□□□□□□□DC□□□□□□□□□□□

3. DC□□□□□□□□□□□□□□□□□□

□□□□□□□□□ DC□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□ect□

Specification

□□□□□□	
□□□□□□□	110V / 220V□10□50 / 60Hz□□±
□□□□□□□	0□60V
□□□□□□□	0□2A
□□□□□□□□	0.1V
□□□□□□□□□□□□□□	0.01A
□□□□□□□	±1□±1□□□
□□□□□□□□	±1□±1□□□
□□□□□□□□□□	≤1mVRMS□RMS□
□□□□□□□□□□	≤3mVRMS□RMS□
□□□□□□	□□LED□□□□□□
□□□□	
□□□□□	□□□□□□□□□4.185□□
□□□□□	35.5 * 16.3 * 19□□□□□□□
□□□□□□□□□	51 * 47 * 41□□□□□□□
□□□□□□	6□□□
□□□□□□□	26□□
□□□□□□□□	□□□□□□220V□□□□□□

Features

BEST 倍思特

Product Name: DC Power Supply

Product Type:BST-A602D

Body weight：4.185kg

Dimensions：255*125*150mm

Features introduced

1.in the output full power of the state, work long hours;

2.Regulation, steady flow automatically switches;

3 Lower ripple voltage;

4 With freely selectable overcurrent protection mode, to adapt to a wider scope of use;

5 Has a continuously adjustable output overvoltage protection, the load has stronger protection；

Products

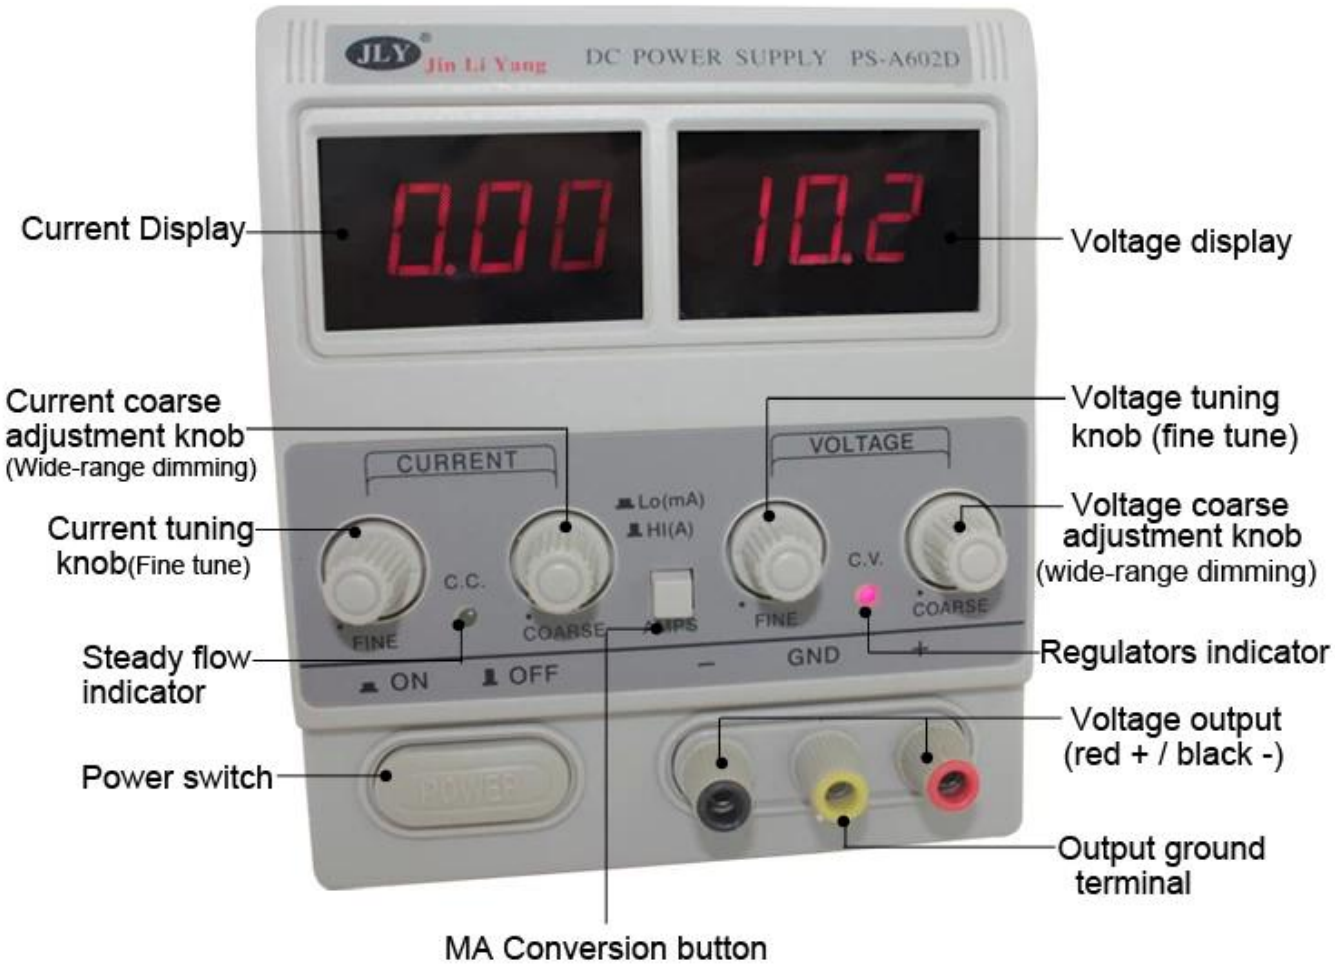
JLY
Jin Li Yang
DC POWER SUPPLY PS-A602D
0.00
10.2
Current Display
Voltage display
Current coarse adjustment knob
(Wide-range dimming)
Voltage tuning knob (fine tune)
CURRENT
VOLTAGE
Lo(mA)
HI(A)
Current tuning knob(Fine tune)
Voltage coarse adjustment knob
(wide-range dimming)
C.C.
C.V.
FINE
COARSE
FINE
COARSE
Steady flow indicator
Regulators indicator
ON
OFF
GND
Voltage output
(red + / black -)
Power switch
POWER
Output ground terminal
MA Conversion button

Picture

Positive

Side

Package

Detail

Current Display

Current display accuracy: 0.01A

Voltage display

Voltage display accuracy: 0.1V

Current FINE / COARSE adjustment knob
Steady flow indicator

Voltage FINE / COARSE adjustment knob
Regulators indicator

Power switch

After power on, press the switch is turned on to work, close to stop working

Voltage Output

Red + / black - / yellow ground terminal for the output