

Features

1. 主要特點

- 採用高品質組件
- 採用高品質組件
- 採用高品質組件; 採用高品質組件
- 採用高品質組件LED

2. 主要特點

3. DC 輸入 輸出 特點

DC 輸入 輸出 特點

Specification

輸入電壓	220V±10% 50Hz
輸入電流	-10°C~40°C <90%
輸入溫度	-20°C~80°C <80%
輸入濕度	<80%
輸出電壓	0~15V
輸出電流	<2A
輸出功率	15W
輸出電阻	2.5%
輸出電壓	≤0.5mVRMS
輸出電流	<2A
輸出電壓	5~1.5v / 3.6v / 4.8v / 6v / 7.2v
輸出電流	0.6-2A
輸出電壓	GSM CDMA PHS
輸出電流	
輸出電壓	1.6%
輸出電流	240mm * 135mm * 165mm
輸出電壓	500*430*350
輸出電流	12%
輸出電壓	21%
輸出電流	


PRODUCT DISPLAY




PRODUCT SIZE


Front

Side

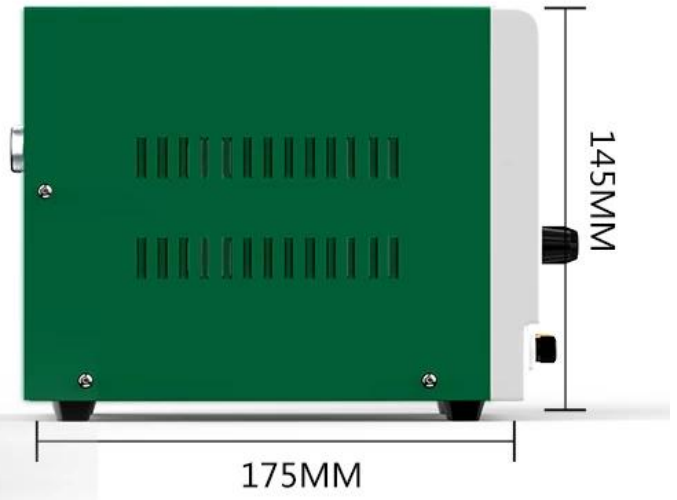


PRODUCT DETAILS

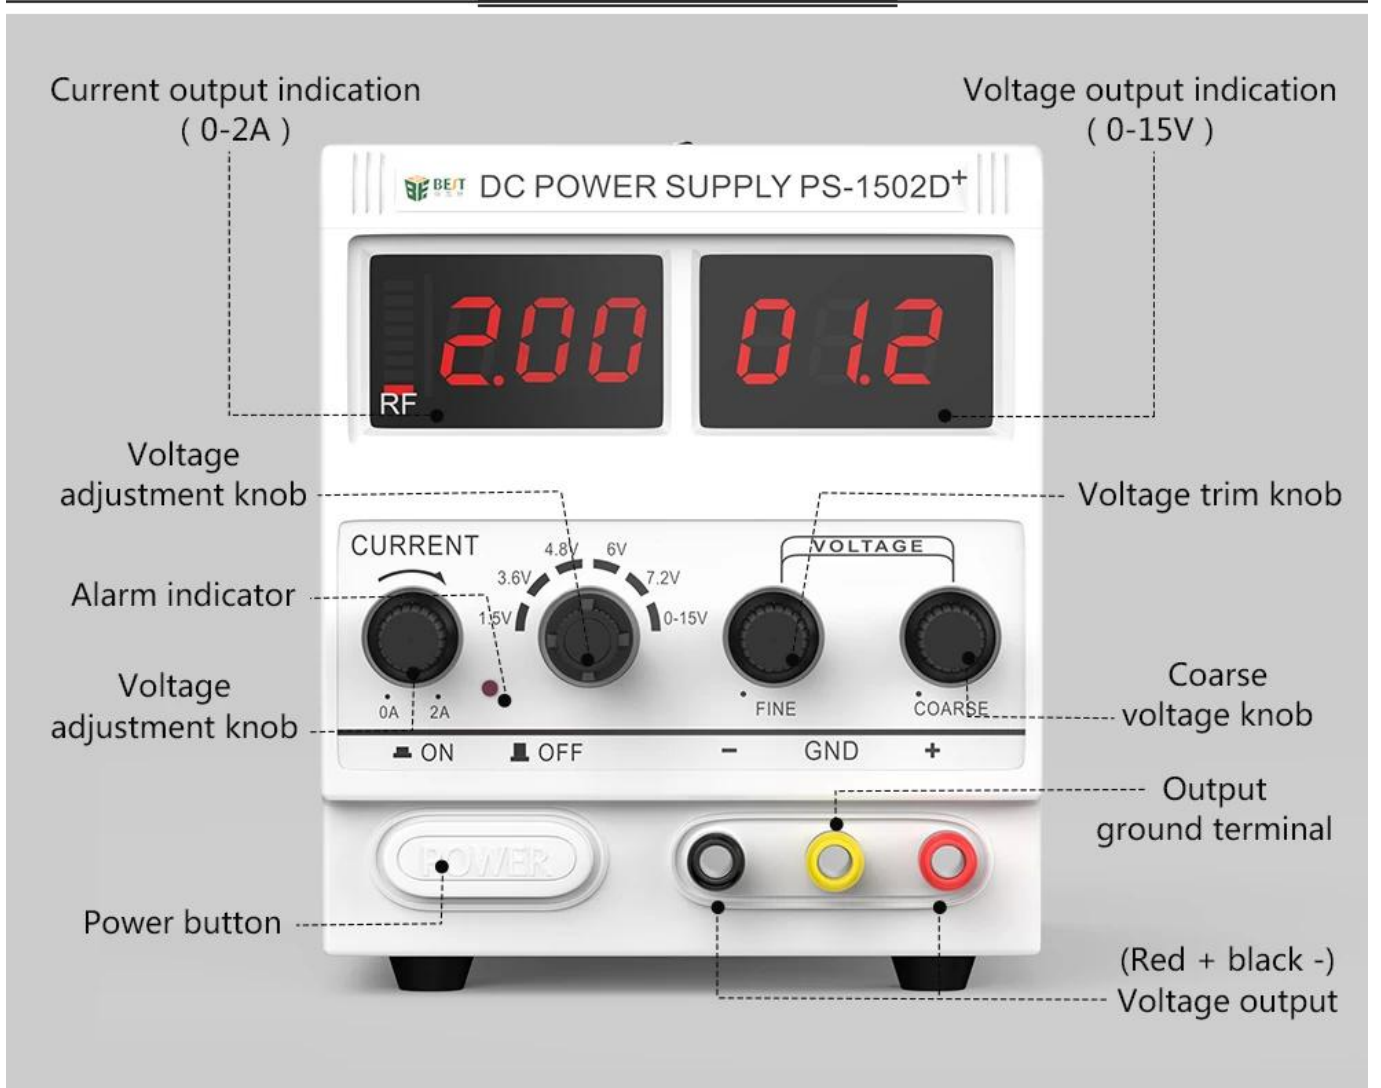

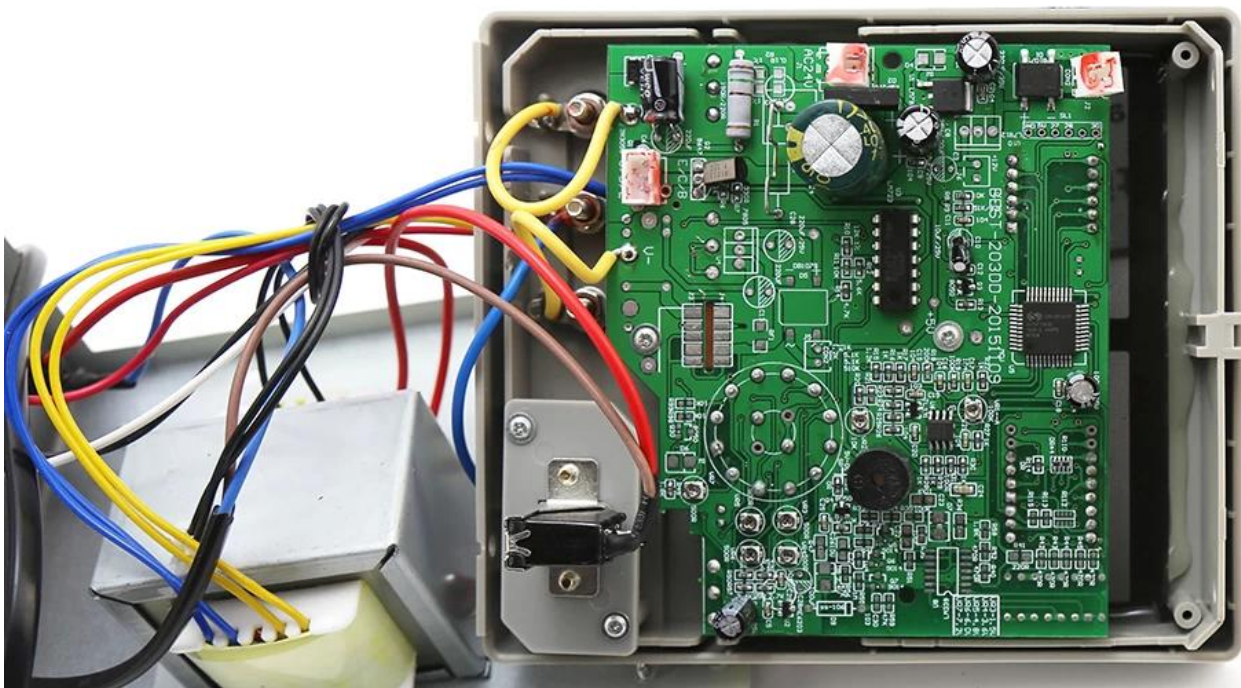

▲ PCB integrated motherboard double-sided chip technology

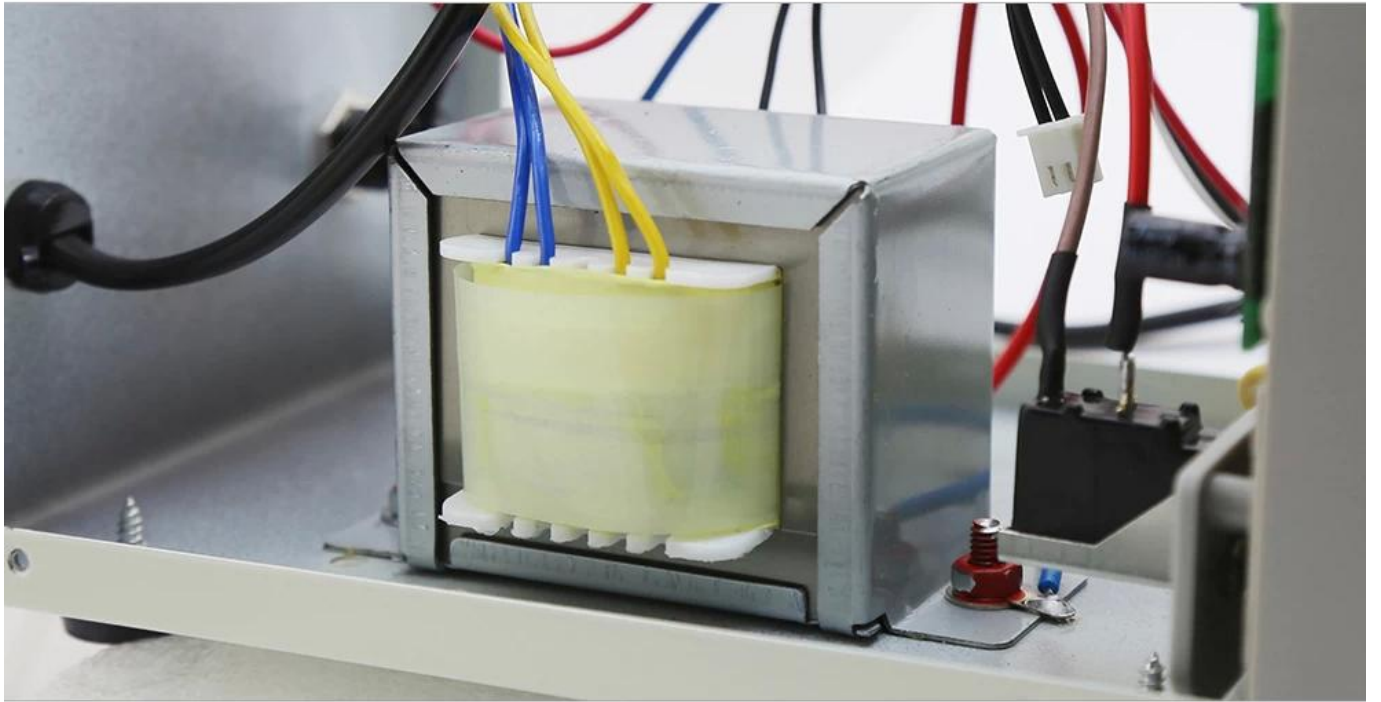

▲ High Power, Pure copper transformer

Rated working conditions

voltage	220v ± 10%
working environment	-10 °C ~ 40 °C Relative humidity: <90%
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%
Corrugated factor	<= 0.5mvrS (5Hz-1MHz) Iomax> 1A
Features	Short circuit protection / overload protection / alarm function / continuity test / automatic recovery

Regulated working conditions

Power stability	<=0.01% + 2mV
Load stability	<=0.01% + 2mV (1max<1A)
Recovery Time	<=100us (maximum current <=3A)

Specifications

model	PS-1502DD	PS-1502D+
Body weight	1.0KG	1.6KG
Dimensions	125MM*175MM*145MM	
Voltage and current	0-15V/0-2A	0-15V/0-2A
Features	Short circuit protection, automatic recovery, voltage test, on-off test	
GSM signal detection	<input type="checkbox"/> Undetectable RF signal	<input checked="" type="checkbox"/> Can detect RF signals
Overload protection current	2A	
Voltage display accuracy	0.1V	
Current display accuracy	0.01A	
Mobile signal strength indicator	Have	
Brush power supply function	no	
Short circuit and overload protection alarm function	Have	

PRODUCT PACKAGING

WEIGHT:1.6KG



1502D+



Box
240mm*130mm*161mm



Instructions



Test lead test line



Power test line