

Features

1. DC Power

- High efficiency power conversion
- Wide input voltage range
- High power density
- Low ripple and noise

2. DC Output

3. DC Output

DC output voltage regulation is excellent, with load regulation and line regulation both meeting the requirements of the application. The output voltage is stable and accurate, ensuring reliable operation of the load.

Specification

Input Voltage	220V±10% 50Hz
Input Frequency	-10°C~40°C < 90%
Input Power	-20°C~80°C < 80%
Input Current	< 80%
Output Voltage	0~15V
Output Current	< 2A
Output Power	15W
Efficiency	2.5%
THD	≤ 0.5mVRMS
Regulation	± 0.5%
Output Voltage	5V / 1.5V / 3.6V / 4.8V / 6V / 7.2V
Output Current	0.6-2A
Output Power	GSM / CDMA / PHS RF
Weight	1.6kg
Dimensions	240mm * 135mm * 165mm
Mounting Dimensions	500mm * 430mm * 350mm
Lead Time	12 weeks
Price	21kg
Notes	For detailed specifications, please refer to the user manual.


PRODUCT DISPLAY




PRODUCT SIZE


Front

Side

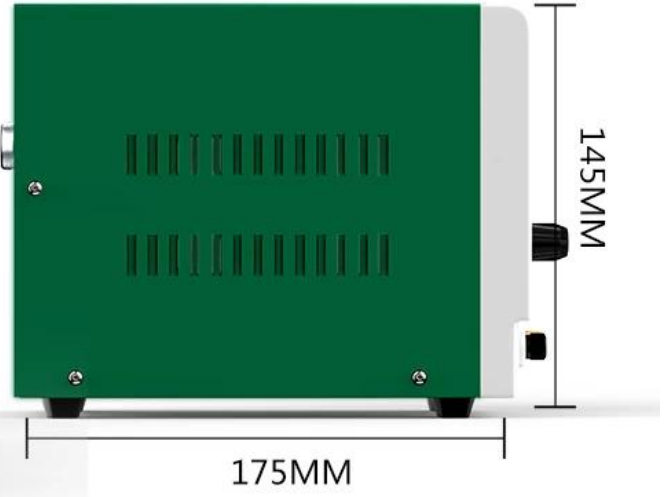


PRODUCT DETAILS

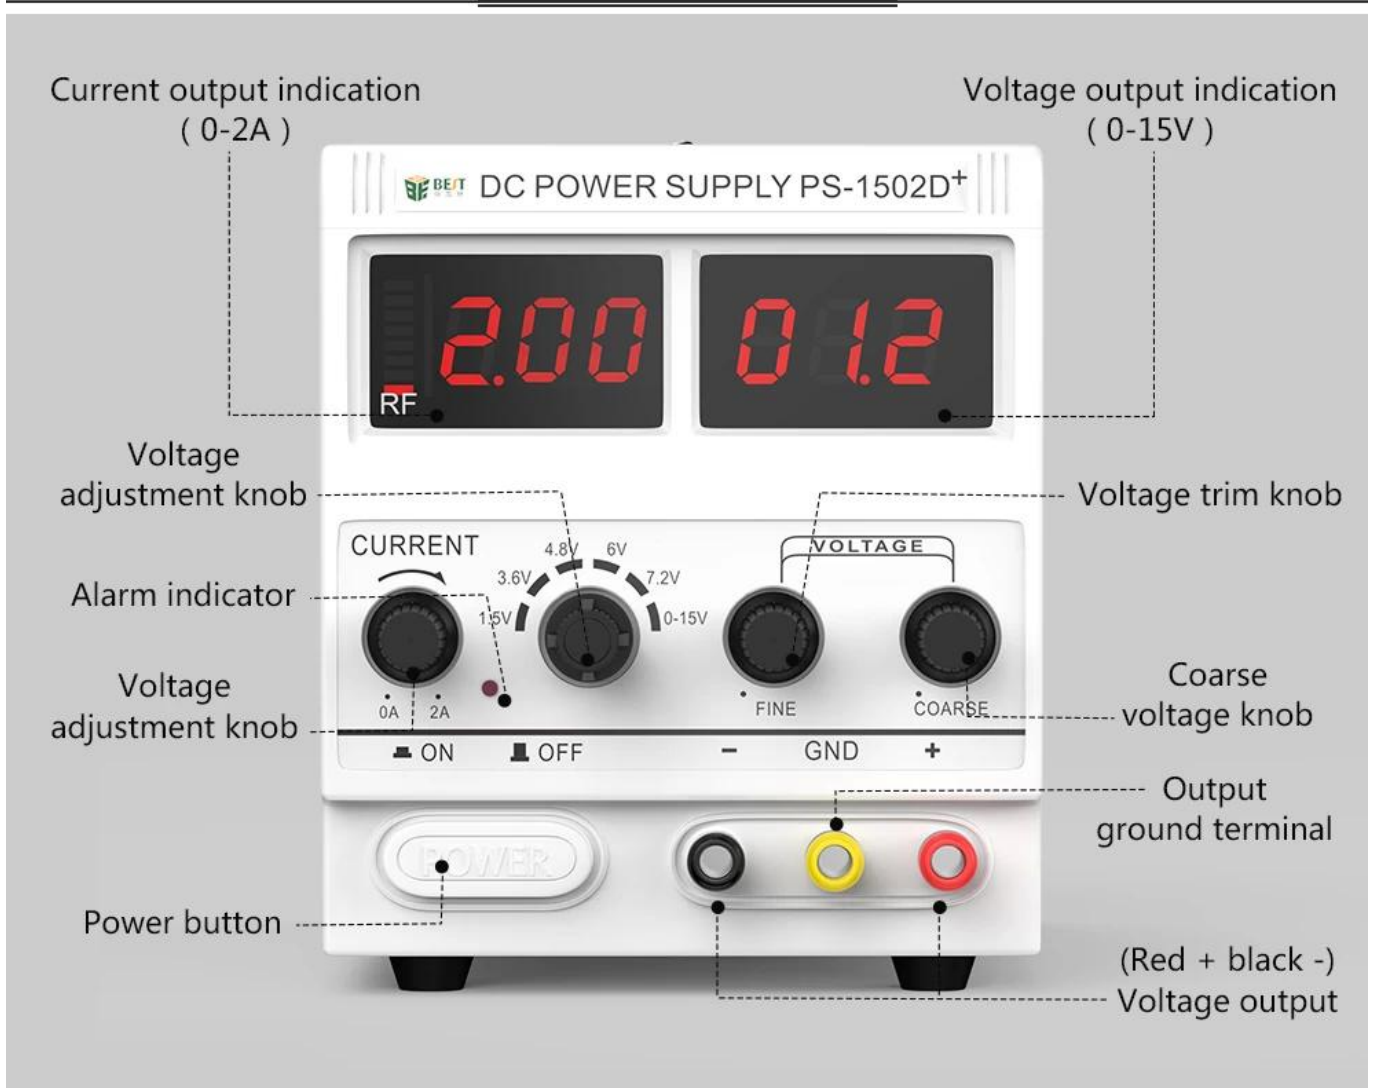

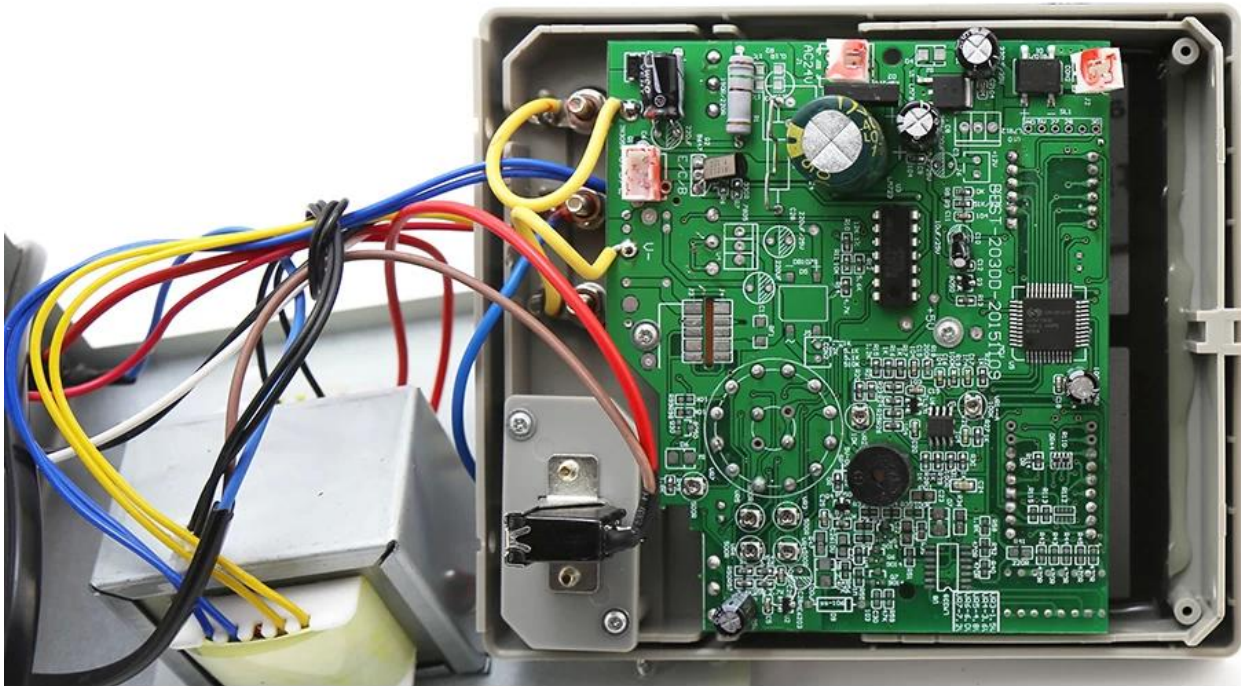

▲ PCB integrated motherboard double-sided chip technology

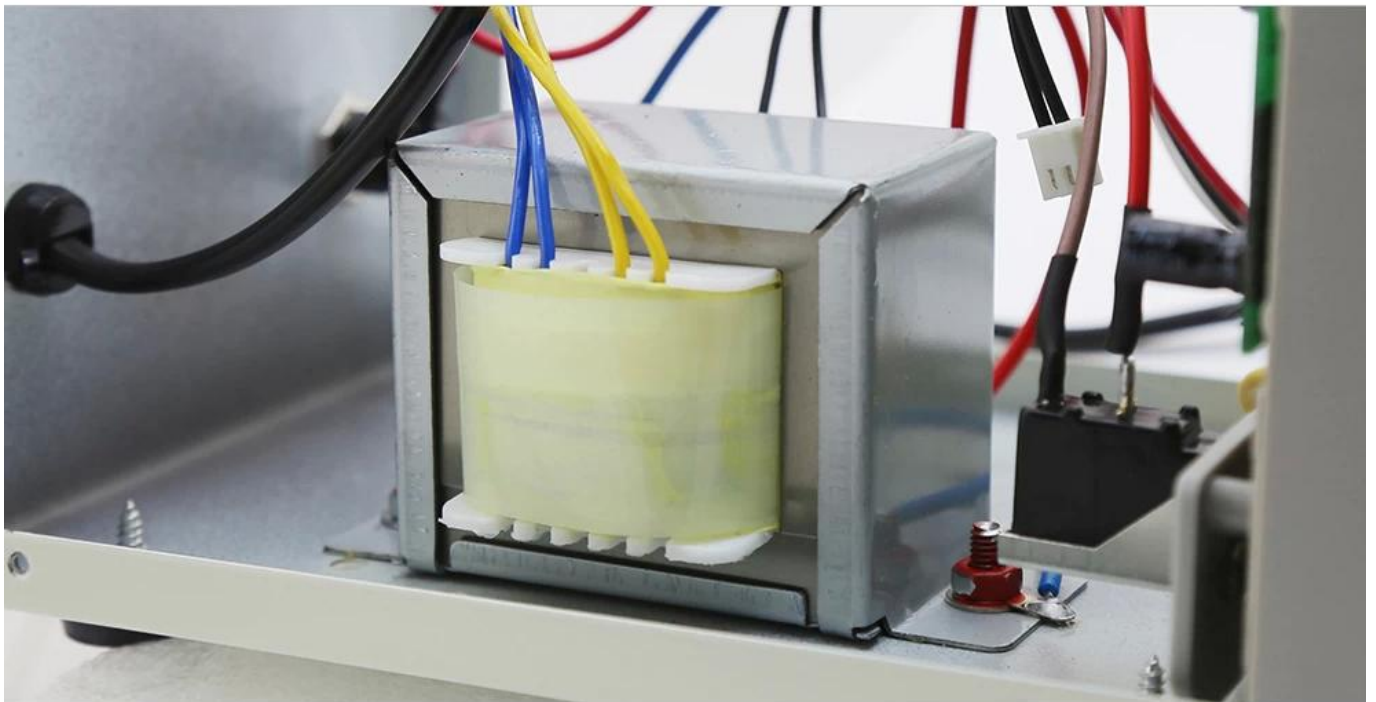

▲ High Power, Pure copper transformer

Rated working conditions

voltage	220v ± 10%
working environment	-10 °C ~ 40 °C Relative humidity: <90%
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%
Corrugated factor	<= 0.5mvrS (5Hz-1MHz) Iomax> 1A
Features	Short circuit protection / overload protection / alarm function / continuity test / automatic recovery

Regulated working conditions

Power stability	<=0.01% + 2mV
Load stability	<=0.01% + 2mV (1max<1A)
Recovery Time	<=100us (maximum current <=3A)

Specifications

model	PS-1502DD	PS-1502D+
Body weight	1.0KG	1.6KG
Dimensions	125MM*175MM*145MM	
Voltage and current	0-15V/0-2A	0-15V/0-2A
Features	Short circuit protection, automatic recovery, voltage test, on-off test	
GSM signal detection	<input type="checkbox"/> Undetectable RF signal	<input checked="" type="checkbox"/> Can detect RF signals
Overload protection current	2A	
Voltage display accuracy	0.1V	
Current display accuracy	0.01A	
Mobile signal strength indicator	Have	
Brush power supply function	no	
Short circuit and overload protection alarm function	Have	

PRODUCT PACKAGING

WEIGHT:1.6KG



1502D+



Box
240mm*130mm*161mm



Instructions



Test lead test line



Power test line